

National II emission standard

SR26MR-3

Powerful, tough, durable and designed with value in mind

- ▶ Engine model: Shangchai SCC11CB255G2B1
- ▶ Rated power: 187 kW/2200 rpm
- ▶ Operating weight: 26.0 t

Product features

Designed for value, durability and power specifically as a bulk waste management and landfill compactor, the 26.0-ton SR26MR-3 features four-wheel drive, torque converter, power shift transmission, stepless speed regulation and articulated frame. For operator productivity and safety, its dual cab comes standard with air conditioning, heating, air purification devices and even a CD stereo. Powered by a Shangchai SCC11CB255G2B1 engine.



shantui e-shop

SHANTUI

VALUE THAT WORKS

Shantui Construction Machinery Co., Ltd.

ADDRESS:
No. 58, G327 Highway
Jining City, Shandong, CHINA

TEL: +86-537-2909369
FAX: +86-537-2311219
EMAIL: trade@shantui.com

SR26MR-3

Technical specifications:

Overall length: 7930 mm





Minimum turning radius: 7250 mm

Overall width: 3660 mm



Fuel capacity: 440L

Overall height: 3925 mm

SR26MR-3

	WEIGHT AND DIMENSIONS	Weights	Operating weight	26000 kg	
			Axle load, front	13000 kg	
			Axle load, rear	13000 kg	
		Compaction characteristic	Static linear load, front/rear	650 N/cm	
			Working width	3360 mm	
			Drum diameter	1636 mm	
		Wheelbase	3500 mm		
	BLADE	Maximum lifting height	1146 mm		
		Maximum cutting depth	165 mm		
		Blade capacity	12 m ³		
	ENGINE AND DRIVE TRAIN	Engine	Make & model	Shanghai SCC11CB25562B1	
			Type	Turbocharged	
			Fuel	Diesel	
			Cooling	Water	
			Number of cylinders	6	
			Rated power	187 kW	
			Rated speed	2200 rpm	
		Drive Train	Minimum ground clearance	435 mm	
			Maximum climbing ability	100 %	
			Forward speed	I	0~4.82 km/h
				II	0~7.66 km/h
III	0~11.6 km/h				
Reverse speed	I	0~4.82 km/h			
	II	0~7.66 km/h			
	III	-			
	CABIN & CONTROLS	Brakes	Service brake	Pressurized air braking	
			Parking brake	Mechanical	
		Steering	Steering system	Oscillating, articulating	
			Steering method	Hydrostatic	
			Steering angle (Grad)	±36°	
			Oscillating angle (Grad)	±8°	

OVERALL DIMENSIONS

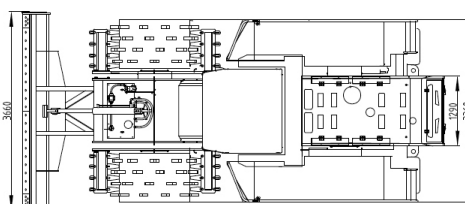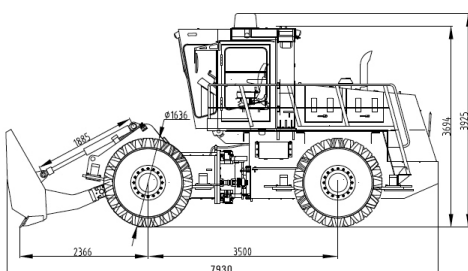

▶ THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.