



25A SCRs

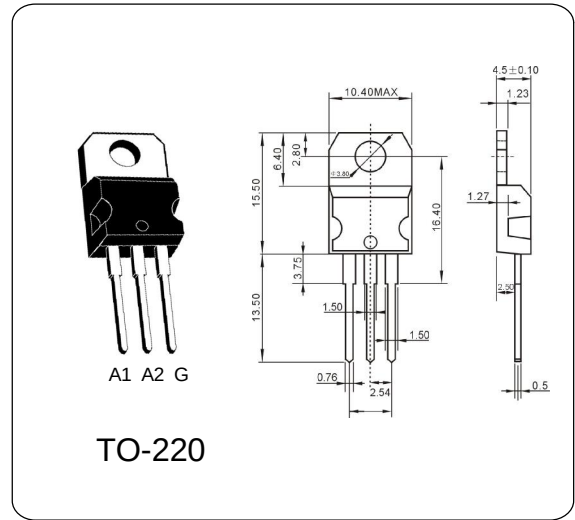
TYN825

DESCRIPTION

Glass passivated thyristors in a plastic envelope, intended for use in applications requiring high bidirectional blocking voltage capability and high thermal cycling performance. Typical applications include motor control, industrial and domestic lighting, heating and static switching.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Typ	Unit
Repetitive peak off-state voltages	V_{DRM} V_{RRM}	800	V
Average on-state current	$I_{\text{T(AV)}}$	16	A
RMS on-state current	$I_{\text{T(RMS)}}$	25	A
Non-repetitive peak on-state current	I_{TSM}	314	A
Max. Operating Junction Temperature	T_j	110	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-45~150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a = 25\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Repetitive peak off-state voltages	V_{DRM} V_{RRM}		800	—	—	V
Average on-state current	$I_{\text{T(AV)}}$	half sine wave; $T_{\text{mb}} < 103\text{ }^{\circ}\text{C}$	—	16	—	A
RMS on-state current	$I_{\text{T(RMS)}}$	all conduction angles	—	25	—	A
On-state voltage	V_{TM}	$I_{\text{TM}}=50\text{A}$, $t_p=380\text{ }\mu\text{s}$	—	1.3	1.60	V
Holding current	I_{H}	$I_{\text{T}} = 500\text{ mA}$ Gate open	—	—	50	mA
Latching current	I_{L}	$I_{\text{G}} = 1.2 I_{\text{GT}}$	—	—	90	mA
Gate trigger current	I_{GT}	$V_{\text{D}} = 12\text{ V}$; $I_{\text{T}} = 0.1\text{ A}$	4.0	—	40	mA
Gate trigger voltage	V_{GT}	$V_{\text{D}} = 12\text{ V}$; $I_{\text{T}} = 0.1\text{ A}$	—	—	1.3	V

Add:Room303 Weiheng Building No.20 B Area Lanyuan Wangyue Rd, Yangzhou Jiangsu P.R.C 225000

Contact Person:John Chang, Sam Chou

Tel: +86-514-8778 2298,8778 2296 FAX:+86-514-8778 2297, 8736 7519

pst@globalsources.com, positioning@china.com

yzforever@163.net pst@pst888.com

MSN ID: john_chang_370@hotmail.com

SKYPE ID : yzforever0313

Marketing web site:www.pst888.com www.yzpst.net

http://positioning.en.alibaba.com/

http://pst.manufacturer.globalsources.com/si/6008819407498/Homepage.htm