
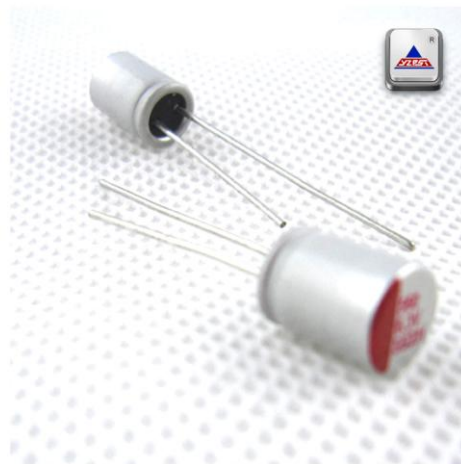


## Production Name: Polymer aluminum solid capacitors

SR series low ESR Products :2.5--35VDC;100uf—2700uf.

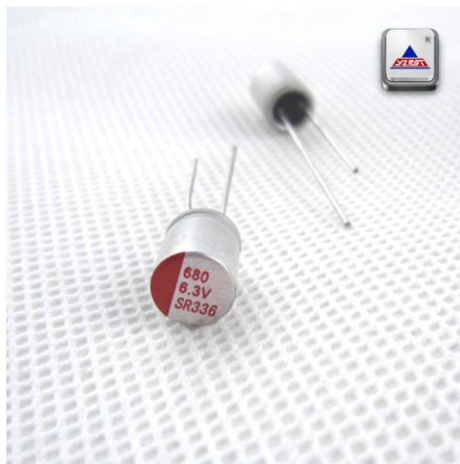


### Product introduction

The conductive polymer aluminum solid capacitor production line are all the most advanced automation equipment, South Korea and Taiwan advanced technology production, the products comply with the eu ROHS directive and the REACH Regulations for SVHC in the instruction.

### Product features

- 1,Low ESR in high frequency range
- 2,Allow large ripple current
- 3,Suitablefor DC - DC converter, communication power supply, set-top boxes, routers, TV, voltage regulator, cell phone adapter, mobile phone charger), computer motherboards and graphics CARDS.



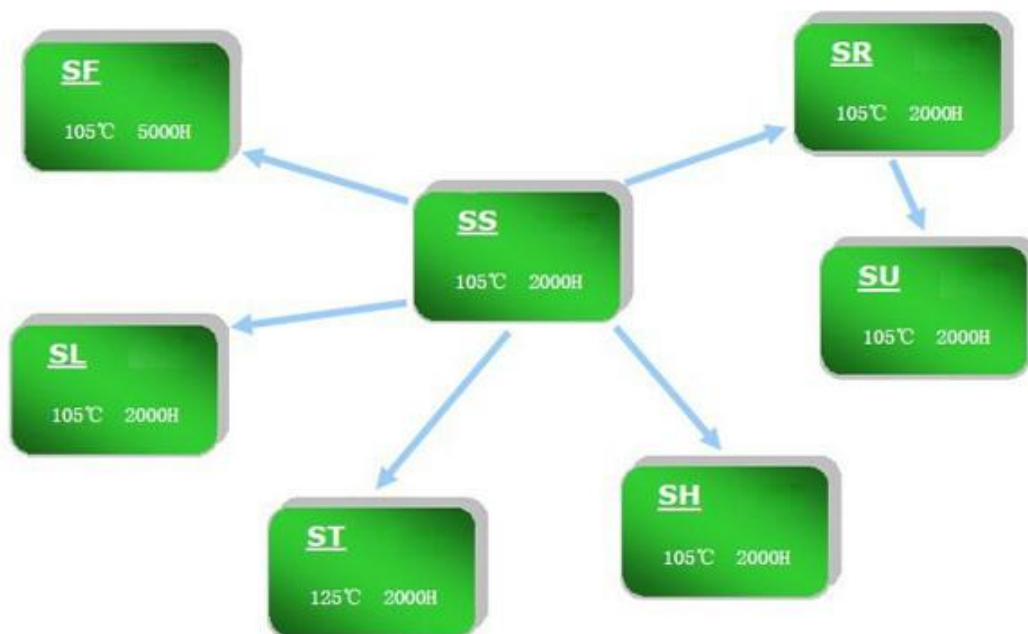

系列 Series	特性 Feature	温度范围 (°C) Temperature range	电压范围 (V.DC) Voltage range	容量范围 (μF) Capacity range	漏电 (μA) Leakage
<u>SS</u>	标准品 standard	- 55°C ~ + 105°C	2.5~25	10 ~ 3500	≤0.2CV
<u>SR</u>	低阻抗 low ESR	- 55°C ~ + 105°C	2.5~35	100 ~ 2700	≤0.2CV
<u>SU</u>	超低阻抗 Ultra low ESR	- 55°C ~ + 105°C	2.5~16	180 ~ 3500	≤0.2CV
<u>SH</u>	高压 High Voltage	- 55°C ~ + 105°C	35~63	4.7 ~ 220	≤0.2CV
<u>ST</u>	125°C 保证 125°C Guaranteed	- 55°C ~ + 125°C	2.5~35	47 ~ 1200	≤0.2CV
<u>SL</u>	低漏电 Low Leakage Current	- 55°C ~ + 105°C	2.5~25	10 ~ 680	≤150uA
<u>SF</u>	长寿命 Long life	- 55°C ~ + 105°C	2.5~16	100 ~ 2700	≤0.2CV

