


2700k 3000k 4000k 6500k

Constant Current **20M Roll** single-ended power, equal brightness

99.99% gold thread, pure copper bracket coated with silver.

USA Intematix phosphor with CRI>80. SDCM≤3-5 each BIN.

Double layer 3 ounce rolled copper FPC with good heat dissipation.

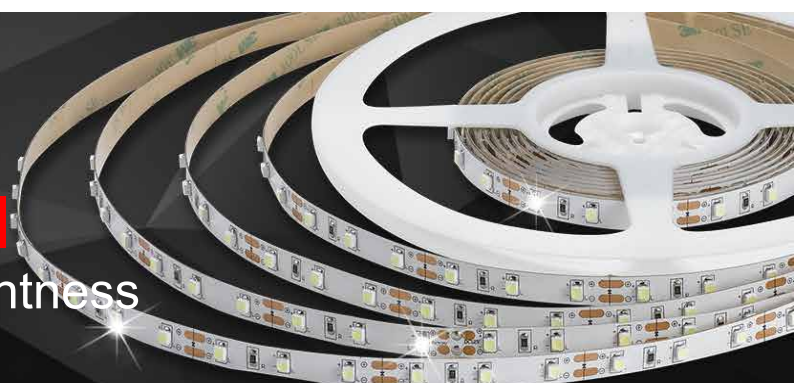

Features >

- Sourced by high output 2835 LED with good color conformity and high light efficiency 100lm/w.
- DC24v, constant current design with equal brightness. Over voltage protection. Safe and stable.
- Max.20m per roll by one end power supply, and Max. 40m by both ends power supply. Long cascade with more convenient installation and much easier connection.
- 99.99% gold thread, pure copper bracket coated with silver.
- USA Intematix phosphor with CRI>80. SDCM≤3-5 each BIN.
- Double layer 3 ounce rolled copper FPC with good heat dissipation.
- 3M 300LSE tape attached.
- CE, RoHS and UL certified.

Application >

- City lighting, landscape lighting, commercial lighting and house contour lighting, etc.

Advantages >

Different IP options

IP33

Non-proof



Indoor

IP55


Glue coating



In humid air

IP65

Silicon pipe



In rain




IP68

Silicon filling



In water

Full CCT ranges from 2300K to 6500K

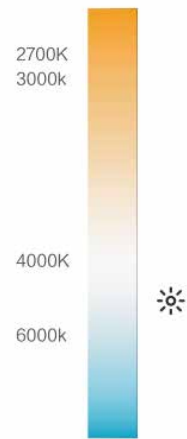

Various CRI option from 75 to 95

CRI 95

CRI 75




Parameters >


Part Number	Dimensions(mm)	LED Type	LEDs/m	Voltage(V)	Power(W/m)	LM/LED	CCT/K	IP Grade
SE60LD2	20000*10	SMD 2835	60	DC24	7.2	25	6000-6500	IP33

Dimension >


Unit:mm

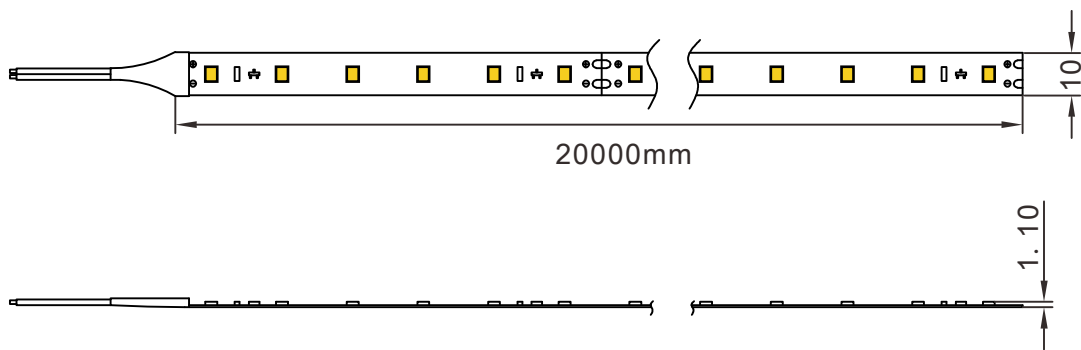


Beaming Angle >

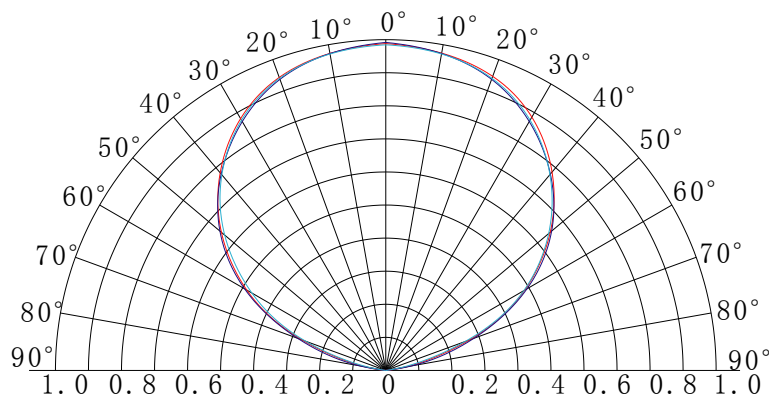

Wire Connection >

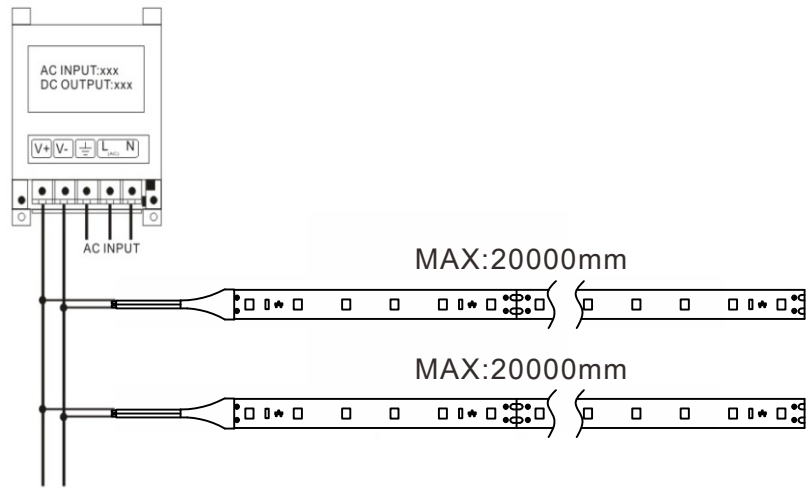

Packing >

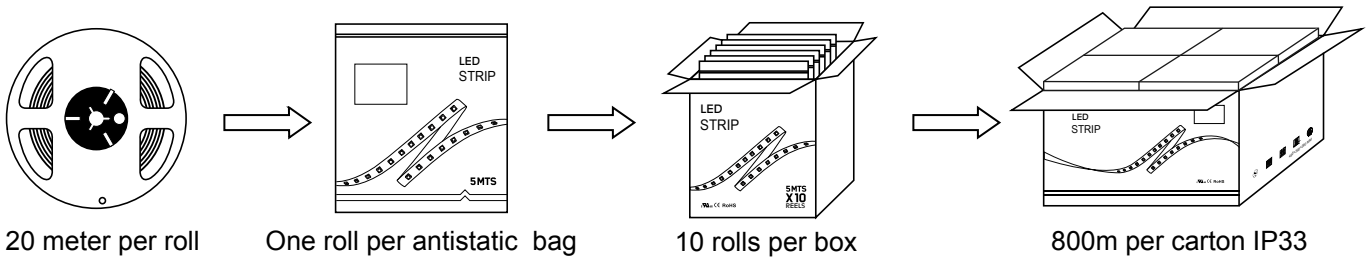

Packing Specification >

- Antistatic bag adopted
- Packing information

Part Number	Carton dimension(mm)	Bags per carton(pcs)	Quantity per carton(m)	Net Weight(kg)	Gross Weight(kg)
SE60LD2	495*395*290	40	800	12.8(1±10%)	15.3(1±10%)

- Due to the packing manner difference, please subject to the actual package in case of discrepancy found between the datasheet and actual package.

Warning



- Disassembling or modifying the product is forbidden.
- Installation with power on is forbidden.
- Any organic solvent chemical is forbidden.
- Isolation and corrosion prevention on all wiring points and wire ends.
- Make sure the power wire is big enough and ensure the voltage and connection are all correct before power on.
- Installation, maintenance should be done by professional staff.
- 20M in a serial connection maximum for DC24V strips.
- The power wire between power supply and LED strips should be less than two meters to keep the same brightness on all parts.

Declaration



- Warranty: 3 years.
- To ensure the safety, the broken wires need to be replaced by the manufacturer or the service agent, or by the qualified staff.
- The given data in the specification is the laboratory data, there may be discrepancy found in the actual products.
- The given drawings in the specification are only for reference, there may be discrepancy found in the actual products.
- The products are subject to change without prior notification.



RoHS

Company Address:

Rm. WS, 9F, LuBan Building, Hongli West Road, Futian District, Shenzhen, China 518034

Factory Address:

No. B, Xinyongfeng Industrial Area, Yingrenshi Village, Shiyuan Town, Bao'an District, Shenzhen, China 518000

TEL: +86-755-83544570

FAX: +86-755-83056229

Website: www.lbyled.com

E-mail: info@lbyled.com



LBY LED®
signs never been so easy