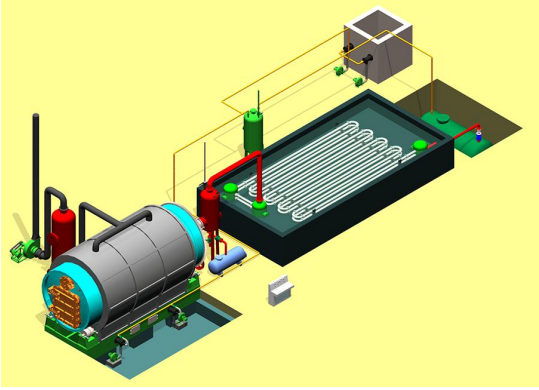
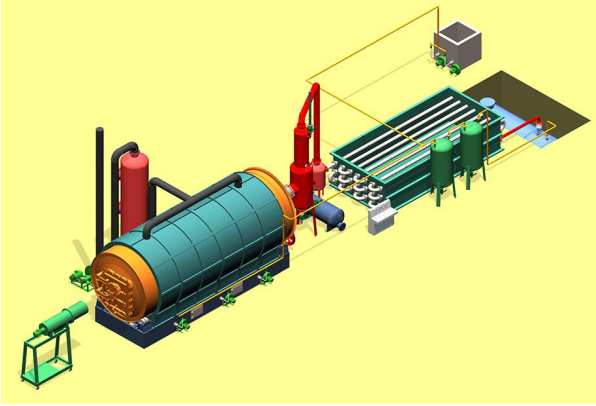
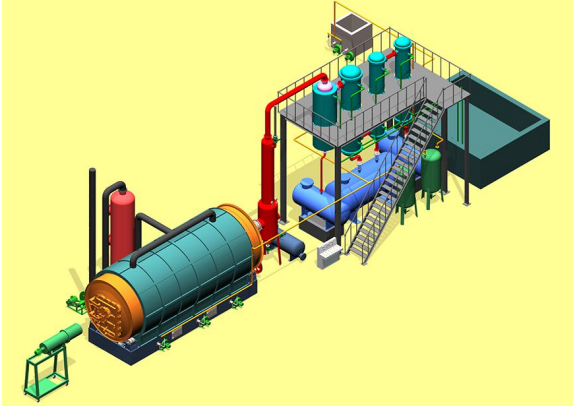


3 Kinds Different Designs of Pyrolysis Machine

Difference	NO.1 design	NO.2 design	NO.3 design
Design			
Workshop temperature	-20°C to 50°C	-20°C to 50°C	-10°C to 50°C
Output Oil	tyre oil	tyre oil	30%Light oil(sell higher price) , 70% tyre oil
Cover area L*W*H	30m*8m*6m	28m*8m*6m	25m*8m*7m
Maintenance cooling system	Need drainage all water when clean cooling system, a little trouble.	No need drainage water when clean cooling system, can save time.	The cooling system impossible blocking, So no need clean it.
Machine Price	lower	medium	Relatively high
De-dusting System	Single Layer De-dusting system	Double Layer De-dusting system	Double Layer De-dusting system