
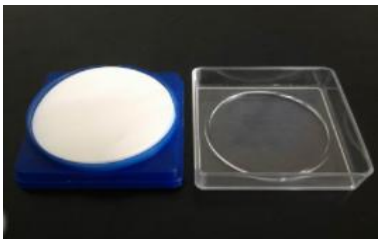






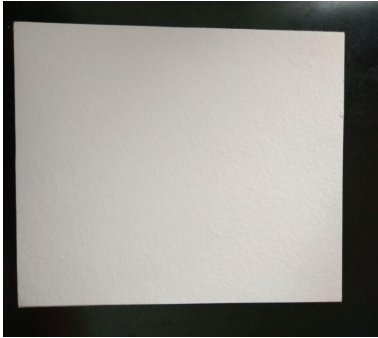

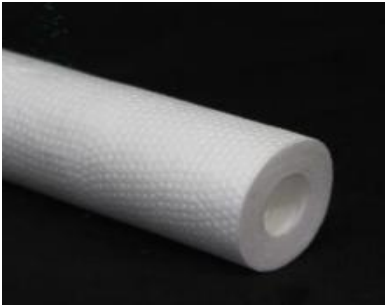














Ji'an city Qing Feng Filter Equipment Material CO.,Ltd



Product Name	Product Photo	Specifications	Main Features	Main Applications
(Disc)Nylon Membrane(N6&N66)		1、 Pore size(um): 0.10/ 0.22/0.45/0.65/0.8/1.0/ 3.0/ 5.0/ 8.0/10 2、 Roundel(mm): Φ13,Φ25,Φ35, Φ47,Φ50,Φ60,Φ70,Φ80,Φ90,Φ 100,Φ142,Φ150,Φ200,Φ300,Φ400	Same as Nylon rolling membrane	Same as Nylon rolling membrane
(Disc)PVDF membrane		1、 Pore size (um): 0.1/0.22/ 0.45/1.0/3.0/5.0 2、 Roundel:Φ13,Φ25,Φ35,Φ47,Φ 50,Φ60,Φ70,Φ80,Φ90,Φ100,Φ 142,Φ150,Φ200,Φ300,Φ400	Same as PVDF rolling membrane	Same as PVDF rolling membrane
Nylon Membrane JN(N6&N66)		1.Pore size(um): 0.10/ 0.22/0.45/0.65/0.8/1.0/ 3.0/ 5.0/ 8.0/10 2、 Rolling film:Width :280/315/320/326/420mm	1、 good resilience, torn-up tolerance and durability;Naturally hydrophilic 2、 Nylon 66 is better mechanical strength than Nylon 6 membrane	various solvent and medication solvent&corrosion-resistance&Ultimate filtration of ink
PVDF membrane		1、 Pore size (um): 0.1/0.22/ 0.45/1.0/3.0/5.0 2、 Rolling Film: Width : 280/315/320/326/420mm	1、 Superior corrosion resistance 2、 Superior temperature tolerance and anti-pollution 3、 Two types, hydrophobic and modified-hydrophobic	1、 organic solvent&additive&chemical materials 2、 high-temperature liquid&air&gas&vapor

MCE/CA Membrane		<p>1、 Pore size (um): 0.10/ 0.22/0.45/0.65/0.8/1.0 2、 Roundel: Φ13、 Φ25、 Φ35、 Φ47、 Φ50、 Φ60、 Φ77、 Φ90、 Φ100、 Φ150、 Φ200、 Φ300、 Φ400 3. Rolling film:Width :280/315/320/326/420mm</p>	<p>1、 Even distribution of pore. 2、 Quick flow speed&high retention rate 3、 Lower working pressure</p>	<p>1、 liquid, removal of particles 2、 Detection of special pollutant in the air&the Escherichia coli&dust 3、 the collection and cleaning of cells</p>
PTFE membrane		<p>1、 Pore size (um): 0.10/0.22/ 0.45/ 0.65/0.8/1.0/3.0/5.0 2、 Rolling film:Width:255/260/510/520mm</p>	<p>1.wide filtration pore size and high folow rate, 2. high retention rate, super chemical tolerance and thermal stability</p>	<p>1、 liquid, removal of particles 2、 Detection of special pollutant in the air&the Escherichia coli&dust 3、 the collection and cleaning of cells</p>
PES membrane		<p>1、 Pore size (um): 0.04/ 0.10 0.20/ 0.45/0.65/0.80 /1.20 2、 Rolling film:Width:260/270/420mm</p>	<p>PES membrane is a highly microporous membrane composed of modified polyethersulfone that is a tough, durable, and temperature-resistant aromatic polymer.</p>	<p>biological, analytical, electronic, pharmaceutical, beverage, and sterilizing filtration applications</p>
PP mebrane		<p>1.Pore size:0.1/0.2/0.45/1.0/3.0/5.0/10./20 .0um, 2. Rolling film:Width:270/1000mm</p>	<p>1. The PP filter membrane is the filter medias of the pleated filter cartridges 2 which are capable of high dirt-holding capacity, high flow rates and broad chemical compatibility.</p>	<p>they are ideal and most cost-effective for the wide range of classification and prefiltration for both liquids and gases in the Food & Beverage industry</p>

<p>Glass Fiber filter membrane</p>		<p>1.Pore size:1/3/5/10/15/20/25um, 2. Rolling film:Width:1000mm</p>	<p>1.Glass fiber membranes adopt 100% borosilicate glass fiber, including two types, with binder shows chemical inertness and without binder</p>	<p>. Applied for high efficiency filter, including waste water detection, water filtration, algae、 bacteria cultivation and food analysis, protein filtration and weak determination of free beta launcher, recommended for weight determination of particulate matter in the air pollution monitoring, stack sampling and adsorption, etc</p>
<p>MBR flat membrane</p>		<p>1.Pore size: $\leq 0.1\mu\text{m}$ 2.Membrane material:PVDF 3.Specification:510mm(W)*1630mm(H), and 510mm(W)*1010mm(H).</p>	<p>Continuous Cycle Aeration System)</p>	<p>wastewater treatment</p>
<p>PP Melt Blown Filter Cartridge</p>		<p>1、 pore size:1.-100um,Length: 10",20",30",40" Endcaps: DOE, SOE (code2, code3, code7, code8) 2.OD:$\phi 60 \sim \phi 130\text{mm}$, ID:$\phi 28$ and $\phi 30\text{mm}$</p>	<p>1、 Low cost ,economic choice for all prefiltration 2、 Easy installation ,replacement and maintenace 3、 High flow rates</p>	<p>1、 water purification 2、 beverage and wine 3、 sewage processing 4、 microelectronic and medicine industries</p>
<p>String Wound Filter Cartridge</p>		<p>1、 pore size:1.-100um,Length: 10",20",30",40", Endcaps: DOE, SOE (code2, code3, code7, code8) 2..OD:$\phi 60 \sim \phi 130\text{mm}$, ID:$\phi 28$ and $\phi 30\text{mm}$</p>	<p>1、 Polypropylene string or cotton string; High flow rates; 2、 Excellent ability to keep dirt 4、 Easy installation</p>	<p>Same as the PP melt blown</p>

<p>PP Micropore Filter Cartridge</p>		<p>1、 Pore size: 0.1/0.20/0.45 /1.0/3.0/5.0/10.0/20.0/40.0/50.0um 2、 Length: 2.5", 5", 10", 20", 30", 40" 3、 Max. operating temperature: 80°C 4.Diameter:68/69mm*33mm</p>	<p>1、 unique low differential pressure, high flow rate and long service life feature&stable 2、 comply with FDA related requirements</p>	<p>1、 drinking water, mineral water, beverage, beer, wine&pre-filtration on water system 2、 organic solvent, chemical reagent, electroplate liquid, ink</p>
<p>PES Micropore Filter Cartridge</p>		<p>1、 Pore size: 0.04/0.1/ 0.20 /0.45/ 0.65/0.80 /1.20(um) 2、 Length: 2.5", 5", 10", 20", 30", 40" 3、 Working temperature: ≤60 Max. 80°C .Diameter:69*33mm</p>	<p>1、 High porosity(about ≥80%) 2、 thermal stability, good intension, withstand shocks and back pressures 3、 passed 100% integrity testing</p>	<p>1、 final filtration of injecta, eye drops; biologicals, vaccine, serum 2、 final filtration of high purity water and chemical raw materials</p>
<p>Glass Fiber filter cartridge</p>		<p>1.Pore size:0.45/1.00/3.00 5.00/10.0/20.0 2.Length:2.5",5", 10", 20", 30", 40" 3.Diameter:68/69mm*33mm</p>	<p>1.High flow rates at low pressure drop 2.Cost-effective and long service life 3.Reliable retention of particulates Featurea and benefits</p>	<p>Pre-filtration before terminal gas filtration Classification and Pre-filtration for viscous and colloidal liquids Classification for wine and other viscous drinks</p>
<p>PTFE Micropore Filter Cartridge</p>		<p>1、 Pore size: 0.10/ 0.20/0.45/1.0 (um) 2、 Length: 5", 10", 20", 30", 40" 3、 Diameter:69*33mm</p>	<p>1、 strong hydrophobicity 2、 Same as the above 3、 same as the above</p>	<p>1、 organic solvent, various alcohols, chemical reagent 2、 compressed air, nitrogen, carbon dioxide filtration for sterile; air fermentation tank</p>
<p>PVDF Membrane Filter Cartridge</p>		<p>1、 Pore size (um): 0.20/0.45/0.80/1.0, Length: 5", 10", 20", 30", 40" 2、 Endcaps: DOE, SOE(code2, code3, code7, code8) 2. Diameter:69*33mm</p>	<p>1、 High flow rate with low pressure drops; 2、 High particle removal efficiency; 3、 Long service life.</p>	<p>1、 Bacteria removal forwinery industry; 2、 Gas filtration 3、 Air filtration; 4、 mineral water and purified water; 5、 Bacteria removal</p>

<p>Nylon Micropore Filter Cartridge</p>		<p>1、 Pore size: 0.10/0.20/0.45/0.65/1.0/ 3.0(um) 2、 Length: 5", 10", 20", 30", 40" 3、 Max. operating temperature: 80°C, ΔP≤0.10MPa 4.69mm*33mm</p>	<p>1、 stable hydrophily, high retention rate, super chemical tolerance, 2、 especially suitable for organic solvent. 3、 passed 100% integrity testing.</p>	<p>1、 beer, beverage, mineral water 2、 sterile raw material pharmacy, medical liquid degerming, solvent medical liquid...</p>
<p>Capsule Filter</p>		<p>1.PP membrane: 0.1/0.2/ 0.45 1/3/5/10um 2.PES membrane:0.1/0.2/0.45/ 0.65um 3.Nylon membrane:0.1/0.2/0.45/ 0.65/1um 4.PTFE membrane: 0.1/0.2/0.45/1um 5.PTFE membrane:0.2/0.45/1um</p>	<p>Medium: PES/Nylon/PTFE/PP/PVDF Housing: PP Nominal Length: 2.5"/112mm; 5"/196mm Diameter: ODΦ67 Fittings: Inlet/Outlet: 1/4"SW; Vent/ Drain: 1/4"SW Effective Filter Areas: 2.5" ≥ 0.14m²</p>	<p>1.Chemicals 2,Solvents 3,Coatings 4,Pigment 5,Oil 6,Photoresist 7,Small volume previous chemicals</p>
<p>304 and 316 Stainless Steel Filter Housing</p>		<p>304, 316L stainless steel Shell type: liquid, gas Length: 5"/10"/20"/30"/40" Connection methods(inlet and outlet): quick opening, screw thread, flange Connection methods(shell and end plate): quick opening, flange Sealing O-ring: silastic, NBR, EPDM, Viton</p>	<p>The filter shell can be used together with various types of cartridges. The inside and outside surfaces are polished finish with reasonable structure and no dead angle</p>	<p>Usually it is used to filter liquid of various industry and air purification</p>
<p>Φ13 Syringe Filter(S13L)</p>		<p>1、 Material of the membrane:Nylon,PVDF,CA,MCE, PTFE,PES 2.Removal Rating: 0.10um, 0.22um, 0.45um 1.0um 2、 Diameter: 13mm</p>	<p>1、 Reliable Quality 2、 Convenient Operation 3、 Manufactured in a 100,000 clean room in a ISO certified plant</p>	<p>1、 Sample Filtration 2、 Liquid Sterilized Filtration Clarification、 Particle Removal Filtration 3、 Gas Sterilized Filtration</p>

<p>Φ25 Syringe Filter (S25L)</p>		<p>1、Material of the membrane:Nylon,PVDF,CA,MCE, PTFE,PES 2.Removal Rating: 0.10um, 0.22um, 0.45um 1.0um 2、Diameter: 25mm</p>	<p>Same as the above</p>	<p>Same as the above</p>
<p>Φ33 Syringe Filter (S33L)</p>		<p>1、Material of the membrane:Nylon,PVDF,CA,MCE, PTFE,PES 2.Removal Rating: 0.10um, 0.22um, 0.45um 1.0um 2、Diameter: 25mm</p>	<p>Same as the above</p>	<p>Same as the above</p>

Company Website: www.qingfengfilter.com & <http://qingfengfilter.en.made-in-china.com>
Contact person: Selina Lee Email: qfgl-selina@qingfengfilter.com Mobile:+86 13979608348