

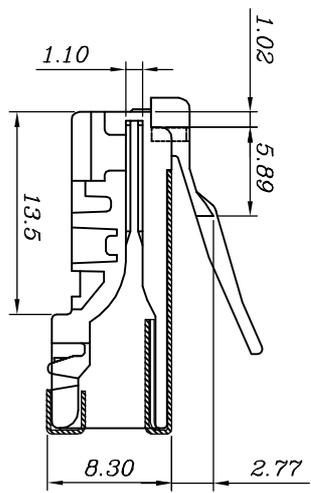


REV	更改日期	变更内容	修改
2014/09/04	2014/09/04	MODIFICATION	DRAWN

阴影部分表示铜外壳 ▲

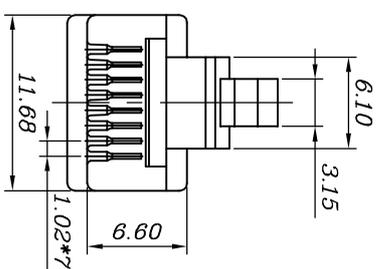

Round

SPECIFICATIONS:
 1.ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.
 WITHSTAND VOLTAGE TIME: 60S.
 INSULATION RESISTANCE: 100M Ω.
 TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.
 2.MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH: 20POUND MIN.
 DURABILITY: 200 MATING CYCLES.
 3.MATERIAL & FINISH:
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: COPPER ALLOY.
 CONDUCTOR : STRANDED & SOLID WIRE . 24AWG, 26 AWG.
 (It can be used for the wire OD from 0.96~0.102)
 GOLD PLATING: 3u"-50u" ARE AVAILABLE.
 SHIELDED SHELL: COPPER ALLOY.

1.电器：
 UL应用最大250VOLTS AC.
 介质耐电压伏特数：1000VOLTS AC.
 耐压时间：60S.
 绝缘阻抗：100百万欧姆。
 终端阻抗：在环境测试后最大可承受20微欧姆终端阻抗。

2.机构
 拉力测试：至少20磅。
 耐力测试：至少200次之插拔测试。
 3.材质表面处理
 塑胶壳：聚碳酸酯，UL-94V-0 or UL94V-2。
 颜色：透明，或者其他颜色亦可。
 金片：铜合金。

▲ 导体：多股线&单股线，24AWG,26AWG。
 （芯线直径：φ0.96~φ1.02均可适用）
 镀金厚度：3u"-50u"，皆可提供。
 铜外壳：铜合金。

客户用产品图



BLADE:	E	EB	Y	YB	Z	A	AE	AB
Drawing								
Mark					✓			
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND
Mark					✓		Mark	✓
							FLAT	



宁波卓新通讯插件有限公司
 NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

DIMENSION IN mm (inch)	材 质	图 号
TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL	DWG NO.
X±0.20	PC	PLUG-098-0014
XX±0.10	名称	名称
XX±2°	TITLE	P88RZ50V2S(小线档封孔)

审核	核对	制图	比例	张数
沈红波	钟均江	Cathlyli	2/1	1/1
Approval	Checked	DRAWN	SCALE	SHEET
			角法	更改
			PREL	REV
				A

ST-DR-009A