


宁波卓新通讯插件有限公司

NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

A/B/C

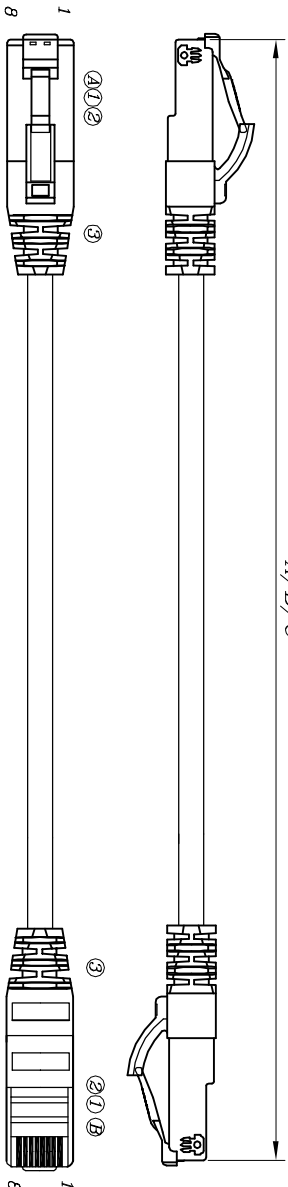


PLUG:

Drawing						
Mark						
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						

TYPE	Shielded	Unshielded
Mark		✓
PC	UL 94-V0	UL 94-V2
Mark		✓

ARRANGE METHOD:



ROHS



Remarks:

- I. →A→ indicate the length 1~9M, tolerance  $-_{0}^{+80}$
- II. →B→ indicate the length 10~20M, tolerance  $-_{0}^{+150}$
- III. →C→ indicate the length above 20M, tolerance  $+(C*1\%)/-0$

Cable printing: E345020 (UL) CM 75C 4PR 24AWG FT4 ETL VERIFIED TO ANSI/TIA-568-C.2  
ISO/IEC 11801 & EN50173 CAT.6 PATCH CABLE -- U/UTP X 1B7A001-3

项次	品名	规格	颜色	用量	项次	品名	规格	颜色	用量	图号
ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.
①	PLUG	C6RH5Z50V2IL	transparent	2	⑥					P60UTTB032-001
②	Insert	11.06	transparent	2	⑦					
③	PVC	60P	—	8g	⑧					
④	Cable Tie	"C"MM	white	2	⑨					
⑤					⑩					
CAT.6 UTP PATCH CORD										
线材规格			WIRE CONNECTION TABLE							
MATERIAL			white/orange	orange	white/green	blue	white/blue	blue	green	white/brown
CAT.6 UTP PATCH CORD 24AWG			A1	A2	A3	A4	A5	A6	A7	A8
CABLE COLOR			B1	B2	B3	B4	B5	B6	B7	B8
			red	orange	yellow	green	blue	purple	gray	white
										black

裁线长度	合计	模号	单位
LENGTH	TOTAL	MOLD NO	UNIT
[A/B/C+80]*[19(0)]*[19(0)]		02-032	MM
			比例 SCALE 1/1
			图法 SCALE 1/1
			图号 DRAWN DATE 2013/10/17
			审核 CHECKED 沈红波
			校对 吴明
			制图 CATHYLI