

RHD蜂巢除湿机
Honeycycle dehumidifier



输送一体式除湿干燥机
All-in-one dehumidifier and loader




RCD箱型干燥机
Chamber dryer



RDM 料斗干燥机
Hopper dryer



RDM-U欧化干燥机
Europeanization dryer



除湿干燥系列机型主要用于对因包装、运输或者回收受潮的的塑胶原料的进行干燥，以确保塑胶产品在成型过程中的质量。根据塑料原料的种类、使用环境,以及塑胶产品成型质量所需求的干燥程度，可选用除湿干燥系列机型中的相关设备，对相应的塑胶原料进行干燥处理。

Dehumidifier and dryer series are suitable for drying plastic dehumidified material caused by packing, transportation and retrieving, to ensure the quality of plastic products in the molding process. Dehumidifying & drying machines can choose the correct model according to different kinds of plastic material, different working conditions and different drying time requirement for different plastic products quality requirement.

宁波北仑日宏机械制造有限公司
Ningbo Beilun Rhong Machinery Manufacturing Co., Ltd

地址：浙江.宁波.北仑.小港街道.东岗碶.
Donggangqi, Xiaogang Subdistrict, Beilun,
Ningbo, Zhejiang Province, China.
T +86-574-55019001 MB: +86 137 7723 9417
F +86-574-55019017
E-mail: rhong@plastic-auxiliary-equipment.com(EN)



Wechat



Website

更多咨询请访问：

www.rhongmachinery.com (EN)
www.plastic-auxiliary-equipment.com (EN)



RHD蜂巢除湿机
Honeycycle dehumidifier
输送一体式除湿干燥机
All-in-one dehumidifier and loader
箱型干燥机
Chamber dryer
料斗干燥机
Hopper dryer
欧化干燥机
Europeanization dryer

RDM系列干燥机是干燥塑胶原料最有效且快速的机型，它可以干燥因包装、运输或回收而潮湿的原料。直接式料斗特别适合于安装在塑胶成型机上进行干燥，快速且省空间。所有机型皆可选择附24小时定时器。

RDM series dryer is a quick-drying machine for plastic and rubber raw material drying, it can dry the humidified raw material caused by packing, transportation and retrieving. The direct-type bunker is especially suitable for installed on the plastic-rubber injection molding machinery carrying out drying. All types of machines, the 24-hours timer are available.

透明视料窗,实时了解料桶内装料情况
Transparent eye-glass window,
can check working situation
at any time

不锈钢料桶,可打开,
清料方便,换料迅速。
Stainless steel barrel,
can open it, easy to clean
material, change material
quickly.

微电脑P.I.D温控仪，实时显示事实值与设定值
Micro-computer P.I.D temperature controller,
real time display of real value and set value.

特有热风弯管设计,保证了送风的顺畅,更利于维护。
Special hot-air winding pipe design, guarantee wind sending in a smooth going way, its benefit to maintenance.

料斗内部高效能的热风扩散装置,使热风分布均匀
Hot wind extending device in high efficiency,the hot wind are distributed evenly, can promote the drying efficiency.

透明视窗型底座
Transparent eye-glass magnet plinth


可选配件
Optional spare parts




磁力底座
Magnetic Base



热风回收装置
Hot wind recovery equipment



24小时定时器
24-hours timer

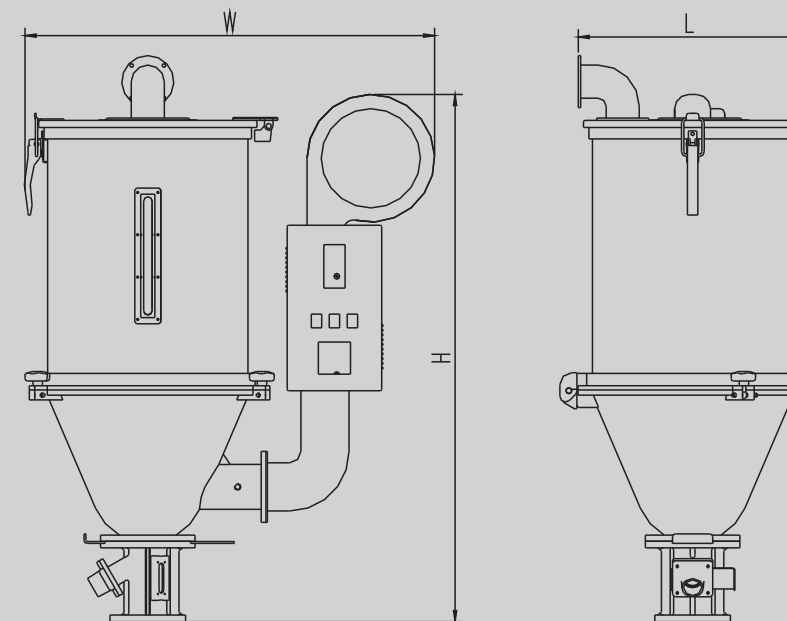

规格表Specifications

机型Model			RDM-12	RDM-25	RDM-50	RDM-75	RDM-100	RDM-150	RDM-200	RDM-300	RDM-400	RDM-500	RDM-600
装料量	Material loading	kg	12	25	50	75	100	150	200	300	400	500	600
干燥电热	Heat power	KW	1.5		4	4	5.5		12	15	18	20	22
送风机	Blower power	W	75	135	155	155	210	215	320	320	340	340	1030
适用机型	Applicable injectors	oz	1		5-8	5-8	10-20	10-20	20-30	20-30	30-50	30-50	30-50
普通底座(E)	Common base (E)	-	●	●	●	●	●	●	●	●	●	●	●
磁力底座	Magnet pad	-	○	○	○	○	○	○	○	○	○	○	○
自动定时器(AT)	automatic timer (AT)	-	○	○	○	○	○	○	○	○	○	○	○
微电脑控制含定(DT)	Micro-computer controlled with timing performance(DT)	-	○	○	○	○	○	○	○	○	○	○	○
保温层(I)	Warm-keeping layer(I)	-	○	○	○	○	○	○	○	○	○	○	○
重量	Weight	kg	20	25	32	35	55	60	150	160	230	240	260
外形尺寸External size													
宽	W	mm	650	700	850	850	970	970	1250	1250	1400	1400	1400
长	L	mm	300	400	500	550	600	600	800	800	900	900	950
高	H		750	950	1100	1310	1150	1700	1570	1900	1900	2150	2100

产品规格若有变更,恕不另行通知。
Please excuse for not note if some specifications of products are changed.

Note 注：

- 1) " o " is standard allocation, " o " is selection purchase.
- 2) There are some small difference in quantity due to the different density of various plastics.
- 3) The machine voltage specification is 3Φ,380V,50Hz.
The voltage can be changed as you require

- 1) “ ”为标配件,“o”为选配件。
- 2) 装料量根据塑胶料的密度不同,略有差异。
- 3) 机器电压规格为3Φ,380V,50Hz。电压可根据要求变更