

除湿干燥系列机型主要用于对因包装、运输或者回收受潮的的塑胶原料的进行干燥，以确保塑胶产品在成型过程中的质量。根据塑料原料的种类、使用环境,以及塑胶产品成型质量所需求的干燥程度，可选用除湿干燥系列机型中的相关设备，对相应的塑胶原料进行干燥处理。

Dehumidifying & drying series are suitable for drying plastic dehumidified material caused by packing, transportation and retrieving, to ensure the quality of plastic products in the molding process. Dehumidifying & drying machines can choose the correct model according to different kinds of plastic material, different working conditions and different drying time requirement for different plastic products quality requirement.

宁波北仑日宏机械制造有限公司  
Ningbo Beilun Rhong Machinery Manufacturing Co., Ltd

地址：浙江.宁波.北仑.小港街道.东岗碶.  
Donggangqi, Xiaogang Subdistrict, Beilun,  
Ningbo, Zhejiang Province, China.  
T +86-574-55019010 MB: +86 137 7723 9417  
F +86-574-55019017  
E-mail: rhong@plastic-auxiliary-equipment.com(EN)



Wechat



Website

更多咨询请访问：  
[www.rhongmachinery.com](http://www.rhongmachinery.com) (EN)

RHD蜂巢除湿机  
Honeycycle dehumidifier  
输送一体式除湿干燥机  
All-in-one dehumidifier and loader  
箱型干燥机  
Chamber dryer  
料斗干燥机  
Hopper dryer  
欧化干燥机  
Europeanization dryer

RCD箱型干燥机适用于所有种类的聚合物材料烘干，并能同时烘干不同的材料，非常适合于少量、多样性的原料或试模时使用，也可用于电子、电机、电镀、烤漆、印刷等多行业相关产品的预热或干燥处理。

The RCD series of chamber dryers are used to simultaneously dry different kinds plastics in small quantity or material for trial moulding. They can be applied in industries of electronic engineering, electroplating, pharmacy, paint baking, printing industries and etc. for preheating or drying related products.

24小时定时装置，操作方便。  
24-hour timer, easy to operate

入风口、排风口采用可调式空气阀门便于调节风量。  
Adjustable air valve at air inlet and outlet so as to adjust wind strength.

不锈钢材料的烤盘及内胆，可防止在烘干过程中污染原料。优化设计，方便维修保养。  
Stainless steel tray and liner bring no contamination to material. Optimized design so as to repair and maintain easily.

移动脚轮，可随时移动到所需位置  
Equipped with universal casters, conveniently placed in the right place.




配置独立温度控制器，超温保护警示。  
Equipped with separate temperature controller and alarm for overheat.

采用P.I.D.温度控制，达到精密的均匀的烘干效果。  
P.I.D temperature control so as to achieve an accurate even drying effect.

配置电流表,实时监测电流状况  
Equipped with ammeter, real-time monitoring of electric current status.

保温密封门可保持恒定的温度并降低热量损耗。  
Air tight insulating door can keep temperature constant inside and reduce energy consumption.

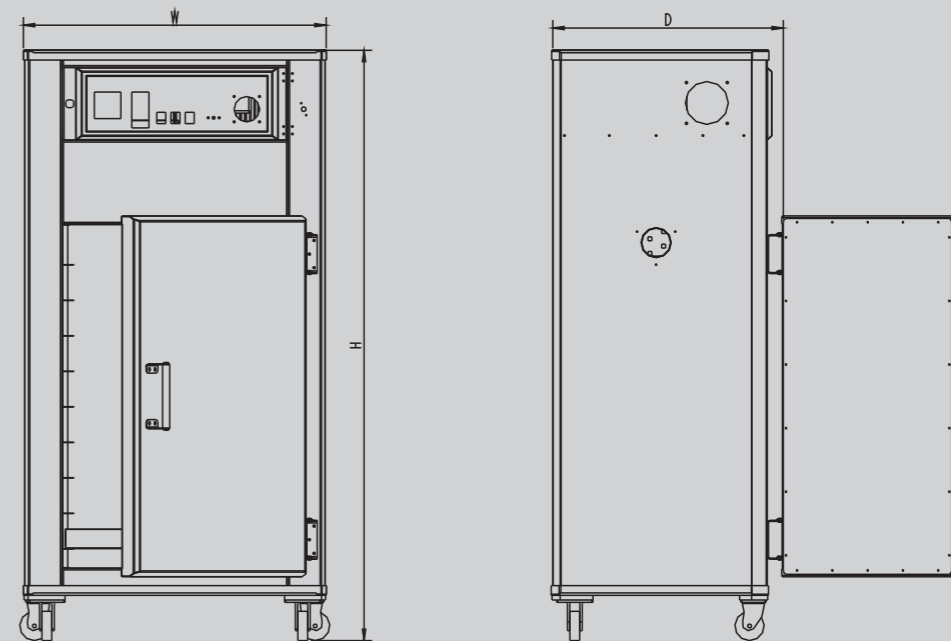

### 规格表 Specifications

机型	Model		RCD-5	RCD-9	RCD-20
干燥电热	Heat power	KW	4	4.5	9
风车马达	Blower power	W	0.37	0.37	1.5
控温范围	Temperature Range	°C	250	250	250
盘架数	Shelf Qty	plate	5	9	20
装料量	Loading Capa	kg	50	100	200
内部尺寸HxWxD	internal Size(HxWxD)	mm	580X580X500	880X580X500	1000X970X800
外部尺寸HxWxD	External Size(HxWxD)	mm	1200X780X600	1500X780X650	1750X1210X950
重量	Weight	kg	126	168	380

产品规格若有变更,恕不另行通知。  
Please excuse for not note if some specifications of products are changed.

Note 注：

- 1) Tray and whole dryer can be custom-made according your specifications
- 2) The machine voltage specification is 3Φ,380V,50Hz. The voltage can be changed as you require.

- 1) 可依需求定制烤盘或整机特制
- 2) 机器电压规格为3Φ,380V,50Hz,可以根据要求变更