


TECHNICAL PARAMETER

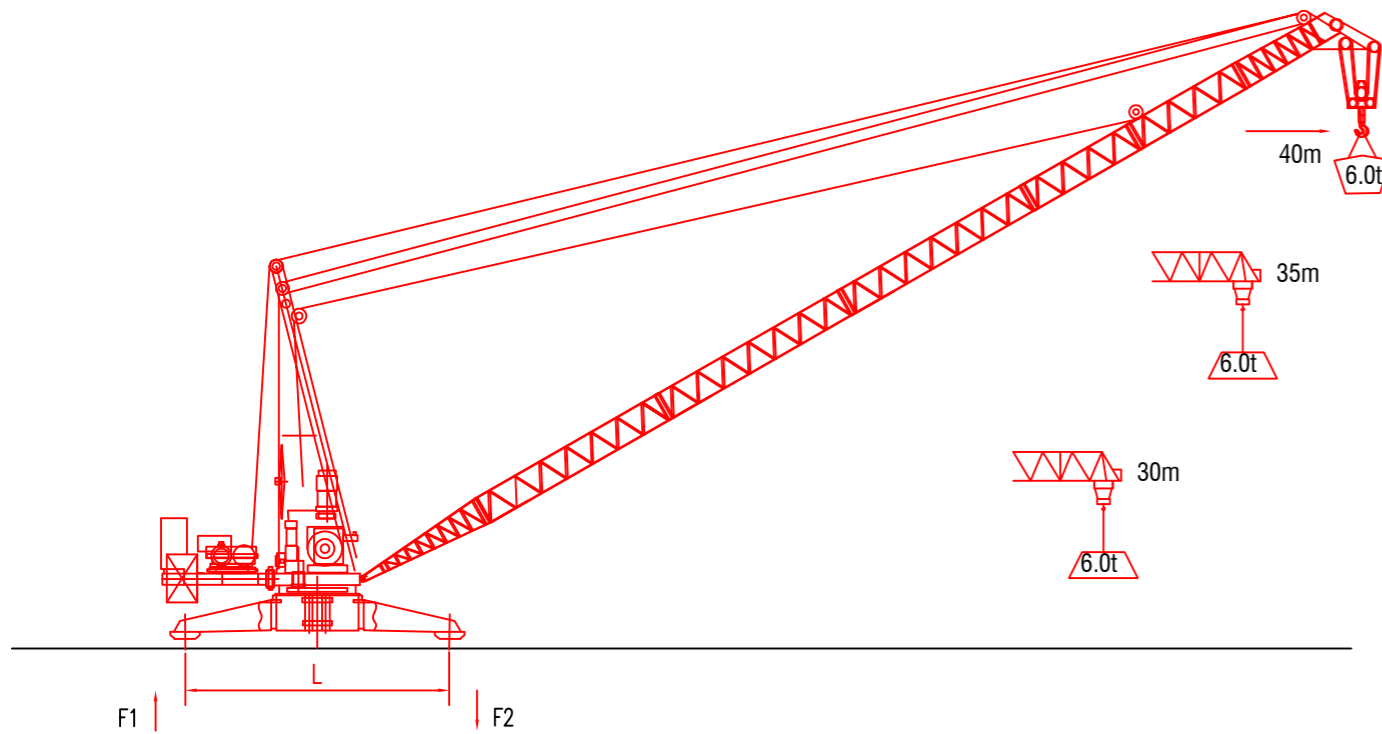

MECHANISMS								m	kw
Hoisting		45LVF25	m/min	0-6.5	0-30	0-3.2	0-15	500	45
			t	6	3	12	6		
Trolleying		45LVF	m/min	(15°-84°)3					45
Slewing		RCV145	r/min	0-0.7					145Nm*2
Power supply				380v.50Hz / 440v.60Hz					
Necessary electric power				170KVA					

LOAD DIAGRAMS

	R(m)	25	28	30	33	35	38	40	m
40m		11.8	10.4	9.5	8.3	7.7	7.0	6.0	t
		6.0	6.0	6.0	6.0	6.0	6.0	6.0	t
35m		12.0	10.8	9.9	8.8	8.4			t
		6.0	6.0	6.0	6.0	6.0			t
30m		12.0	10.8	10.0					t
		6.0	6.0	6.0					t