


**H.264 1.0/1.3MP CCTV Video Security Surveillance IR Dome IP Camera**



**Features**

- \*Hisilicon high-performance DSP
- \*High quality progressive scanning CMOS
- \*H.264 High profile
- \*support dual stream, support mobile phone
- \*support power supply DC12V/POE(optional)
- \*Standard ONVIF Protocol
- \*Complete SDK for second development. Support multi network protocols
- \*Provide a unified free client to achieve video recording/playback/preview
- \*Support ICR filter switching function, day and night surveillance
- \* Metal case

**Dimension**

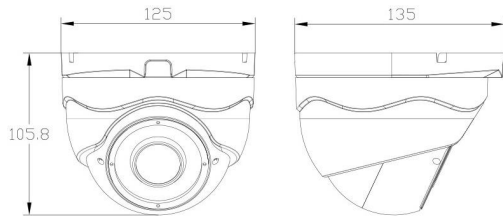

**Accessories**

- User Manual
- CD
- Screw fittings

| Specification         |   |  |
|-----------------------|---|--|
| Product Name          | <b>H.264 1.0/1.3MP CCTV Video Security Surveillance IR Dome IP Camera</b>   |  |
| Model No.             | WDM-7763E   | WDM-7863E  |
| Video                 |   |  |
| System                | Hisilicon high-performance DSP, XM510+H62   | Hisilicon high-performance DSP, XM510+H65  |
| Sensor                | 1.0M Pixel 1/3" CMOS Sensor   | 1.3M Pixel 1/3" CMOS Sensor  |
| Output resolution     | 1280(H)×720(V)  |  |
| D/N Mode              | Auto switching,black and white vide and IR cut action linkage   |  |
| Illumination          | Color 1.0Lux@F1.2,Black 0.1 Lux@F1.2  |  |
| Video processing      | H.264 video compression, dual streaming   |  |
|                       | AVI format, 0.1M~6Mbps adjustable;  |  |
| Video Output          | Main streaming:<br>1280×720,1024×768,1280×720;<br>Sub streaming:<br>960×540,640×360,480×270,352×288,320×240,352×192,<br>320×192,288×192,256×192 | Main streaming:<br>1280×960,1280×720,1024×768,1280×720;<br>Sub streaming:<br>960×540,640×360,480×270,352×288,320×240,352×192,<br>320×192,288×192,256×192 |
| Frame rate            | 1.0MP 25/30 frame(full real time),support 1~30frame/seconds adjustable  | 1.3MP 25/30 frame(full real time),support 1~30frame/seconds adjustable   |
| Network interface     | RJ45 ethernet,10/100M;RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP protocol supported  |  |
| Access Protocol       | Standard ONVIF Protocol, Support third party access; PC;<br>Support IE6.0 and aboveSmartphone<br>Support Android/iPhone                         |  |
| Lens                  |   |  |
| Lens                  | 3.6/6mm lens  |  |
| IR distance           | 30m(36pcs f5 IR leds)   |  |
| Function              |   |  |
| Function              | Support WEB configuration, OSD,real-time video transmission   |  |
|                       | Support motion detection  |  |
|                       | Support front end storage ,playback and download  |  |
|                       | Support uniform client and platform system application  |  |
|                       | Support complete SDK for second development.  |  |
| Normal                |   |  |
| Power supply          | DC12V/POE(optional)   |  |
| Operation temperature | -10°C~+60°C,10%~90%RH   |  |