

HSCT-150 Single Ring Heat Shrink Soldering Tin Terminal

Description




EVA hot melt adhesive, the middle is single soldering tin design. It's applied to electric wire, wire connection, waterproof, insulation and protection.

Feature & benefit

- 1, Shrink ratio: 2: 1
- 2, Hot melt adhesive make it waterproof.
- 3, East to install

Product Application


Suitable for the middle connection of the thick cable.

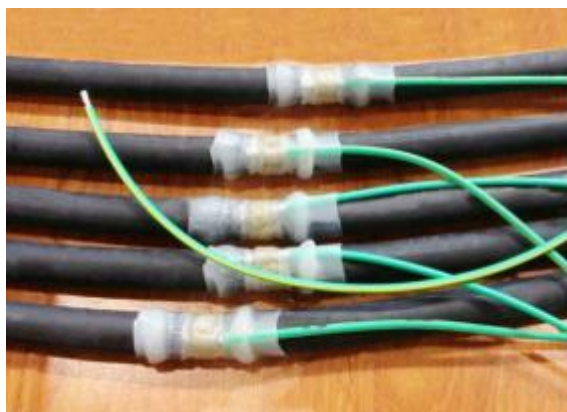


Operating indexes:

- 1, Initial temperature: 80 °C
- 2, Working temperature: 55 °C ~ 150 °C
- 3, Solder start melting temperature: 138 °C
- 4, Solder complete melting temperature: 160 °C

Product Drawing

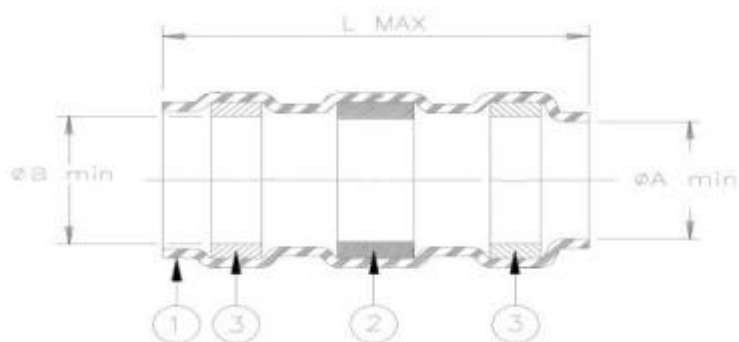


Dimension

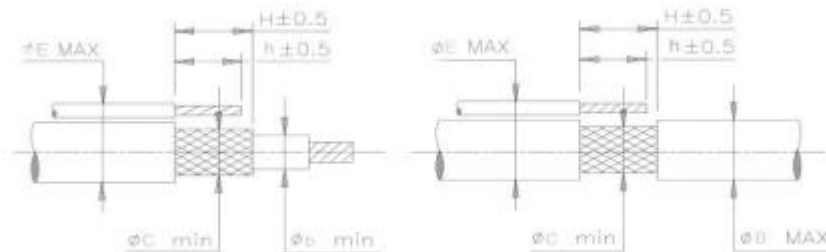

Part Number	Product Size(mm) / (inch)			Cable Size (mm) / (inch)					
	ϕA (min)	ϕa (min)	L (max)	ϕE (max)	ϕC (min)	ϕb (min)	ϕB (min)	$h \pm 0.5$ ($h \pm 0.02$)	$H \pm 0.5$ ($H \pm 0.020$)
HSCT-150 -03	2.5 (0.098)	3.0 (0.118)	24.5 (0.964)	3.0 (0.118)	1.5 (0.059)	1.0 (0.039)	2.5 (0.098)	6.0 (0.236)	7.0 (0.275)
HSCT-150 -05	4.3 (0.169)	4.8 (0.189)	29.3 (1.153)	4.8 (0.189)	2.0 (0.078)	1.5 (0.059)	4.3 (0.169)	8.0 (0.315)	9.0 (0.354)
HSCT-150 -07	6.8 (0.267)	7.3 (0.287)	32.5 (1.279)	7.3 (0.287)	3.3 (0.130)	2.8 (0.110)	6.8 (0.267)	10.0 (0.393)	11.0 (0.433)
HSCT-150 -11	10.8 (0.425)	11.5 (0.452)	35.5 (1.397)	11.5 (0.452)	4.5 (0.177)	4.0 (0.157)	10.8 (0.425)	12.0 (0.472)	13.0 (0.512)
HSCT-150 -13	13.0 (0.512)	15.1 (0.594)	45.5 (1.79)	15.1 (0.594)	7.0 (0.275)	6.5 (0.256)	13.0 (0.512)	16.0 (0.630)	17.0 (0.669)
HSCT-150 -17	17.0 (0.669)	19.0 (0.748)	55.5 (2.165)	18.0 (0.748)	9.0 (0.354)	8.0 (0.315)	16.0 (0.630)	21.0 (0.827)	23.0 (0.905)
HSCT-150 -23	22.5 (0.885)	24.5 (0.964)	80.0 (3.149)	23.5 (0.925)	12.0 (0.472)	11.0 (0.433)	21.5 (0.846)	29.0 (1.142)	31.0 (1.220)
HSCT-150 -33	33.0 (1.299)	35.0 (1.380)	80.0 (3.149)	34.0 (1.338)	19.0 (0.748)	17.0 (0.689)	32.0 (1.259)	29.0 (1.142)	31.0 (1.220)

KEYUACE

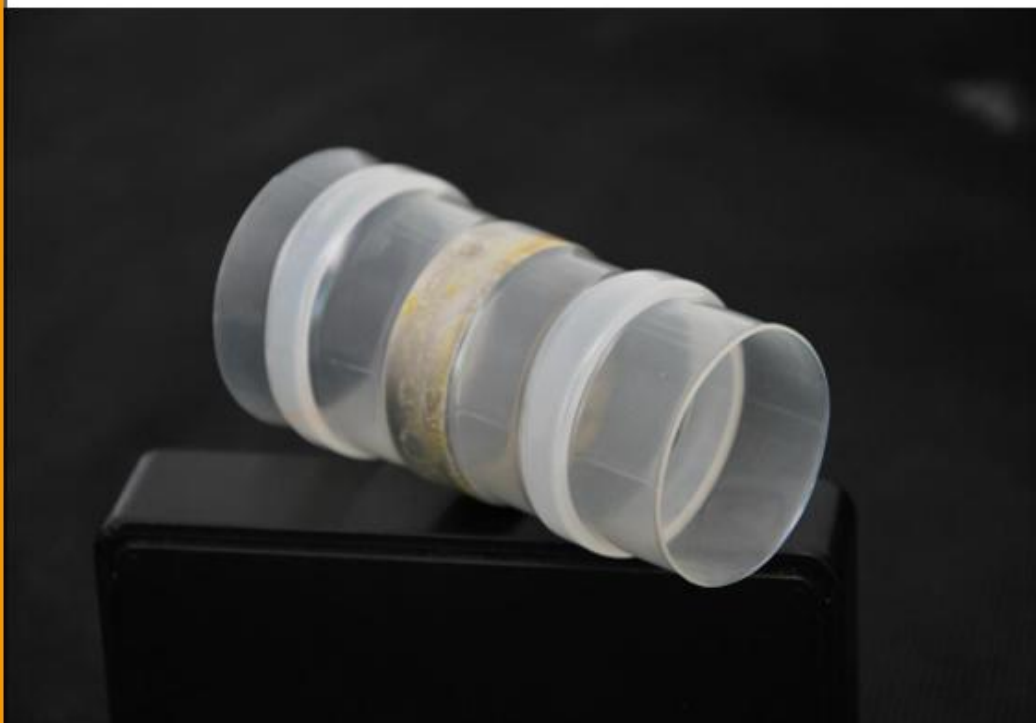

High-quality in China



sales@keyuace.com