




Ac254



Battery Case ID: Ac254(A4LX)
 Cell inside: 2pcs li ion 18650 cell
 Dimension: 22*49*71mm
 Input/Output Terminal: 3.5*1.35mm coax type,
 or designated connector in extension cable.
 Weight: 113g
 Function Code: NS, CC, PC, DM



Typical Capacity Option:

7.4v 2200mAh/2600mAh/3200mAh/3400mAh
 3.7v 4400mAh/5200mAh/6400mAh/6800mAh




4 LED Indicating Design

*Battery Remaining Level
 *Battery PMW Output Power Rate(During Operation)
 **Light Color Option: Green, Red, Blue
 ***Battery will display the current output setting for 5 seconds
 when user changes the setting, then shortly after it will display
 the current battery remaining level.

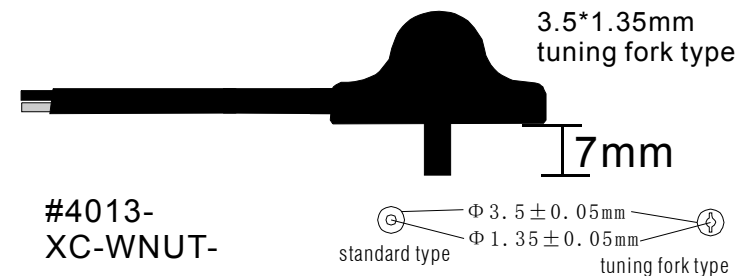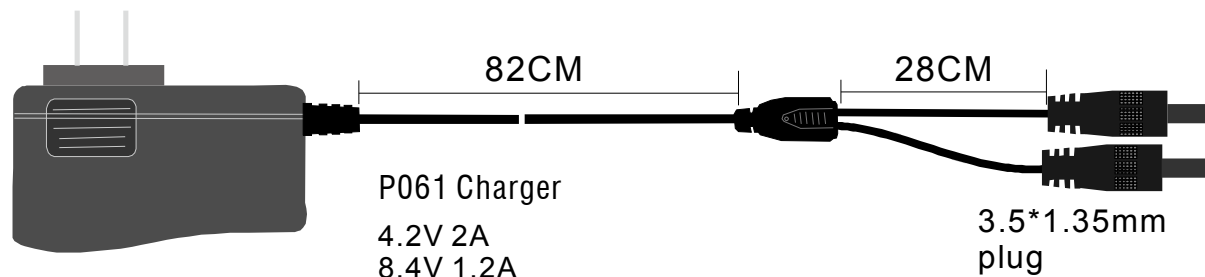

#4013-
XC-WNUT-

recommended plug for heating wears

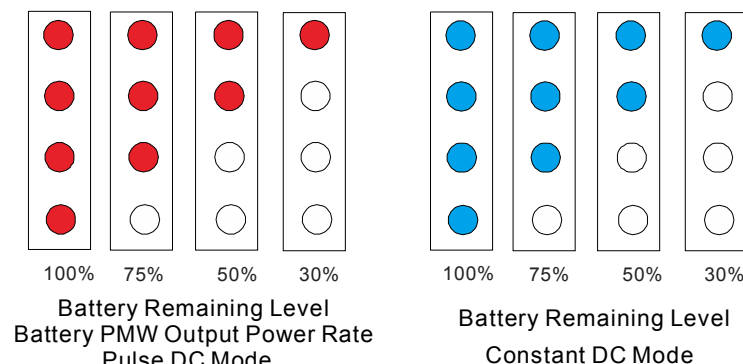

Battery Remaining Level
 Battery PMW Output Power Rate
 Pulse DC Mode

Battery Remaining Level
 Constant DC Mode

Asarke DM Battery



blister KT1



blister KT2



box c2b, c4h



large blister B1



small blister B1S