



Ac603




wireless version available



Battery Case ID: AC603
 Cell inside: 6pcs 18650 li ion cells
 Dimension: 25*95*120mm
 Input/Output Terminal: 5.5*2.5, 5.5*2.1, 3.5*1.35mm
 Weight: 351g
 Function Code: CC, PC

Typical Capacity Option:
 11.1v 4400mAh/5200mAh/6400mAh/6800mAh
 7.4v 6600mAh/7800mAh/9600mAh/10200mAh


LED Screen Display



The dot light ON (RED) = battery in charging, or shows current output setting

The dot light OFF = battery shows charge level (1 = no charge up to 9 = full charge)

Output setting: 3 levels
 1.=33%, 2.=66%, 3.=99%
 Custom Setting Optional
 Wireless Controller Optional



Rapid Charging 15000-15600mAh Lithium Ion Battery Pack

Recharge 14000mAh in 60minutes

Model: 15M15200
 Style: 60403 Type: 18650X5
 Main: EC010-CF-1V2200, 5010-PC-1V2200
 Battery: 11.1V 2000mAh 3.7V 2000mAh
 Input: DC 12.6V 0.9A max
 Output: 5V/2.1A, 5.1A max
 Full charge: 9 levels
 Energy: 45Wh
 PC/RC version with 9 output settings
 1=50%, 2=66%, 3=99%
 Includes with developed wireless remote controller

LED Dig. to Display
 (the display 0V 0mAh) = battery is empty, or shows current output setting
 the dot light ON = battery is in charging (if no charge up to the full charge)

Switch On Switch Off


5.0A Max Charging 12.6V

Series Code: 820100001

CE FC RoHS REACH

Cell Inside UL Listed

MADE IN CHINA

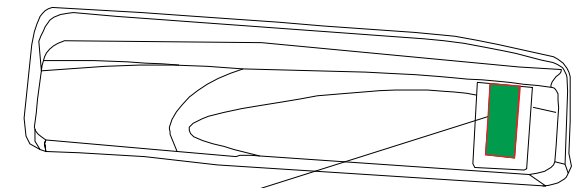


5.1V 2A USB Port

Fast Charging Power Bank, Portable Charger, Mobile Charger

ASARE INDUSTRY CO., LIMITED
 Mobile: 13418551644
 Sam Libiao Wu
 sam@asarke-industry.com



LITHIUM ION BATTERY PACK

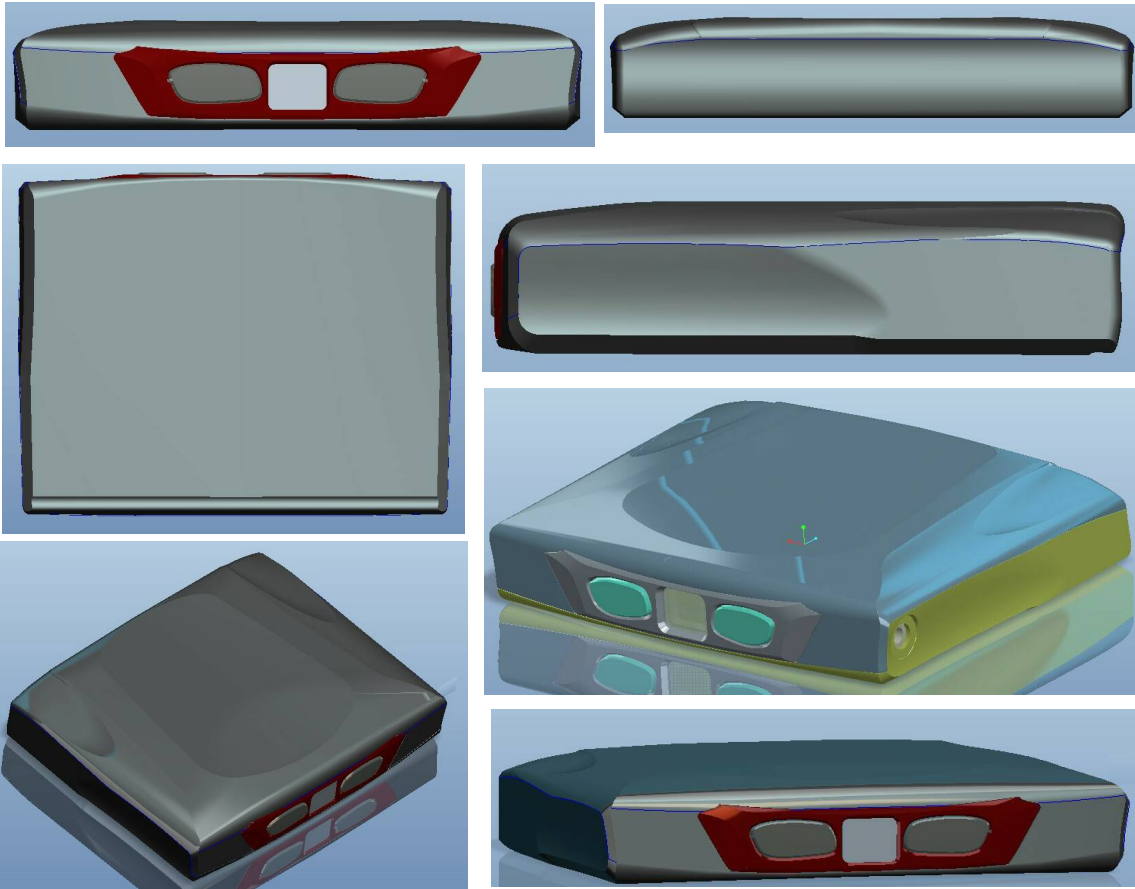

31*57*120mm

P1985

12.6V 5A UL Charger

Recharge the battery to 90% full in 1 hour.

The highest recharging rate on standard power bank is $9V \times 2A = 18W$
 This Ac603 gets $12.6v \times 5A = 63W$, 3 times more then those highest speed.
 The normal recharging rate on standard power bank is merely $5V \times 1A = 5W$,
 Wasting too much time waiting the power bank recharge back itself.

Fast Charging Power Bank, Portable Charger, Mobile Charger