
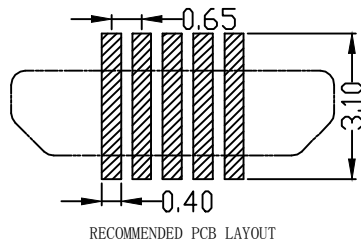
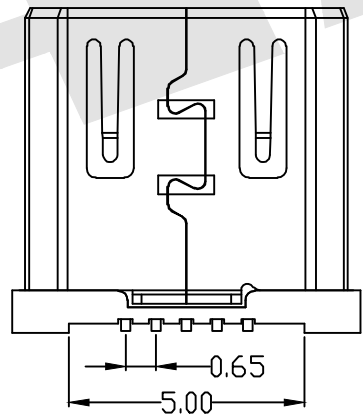
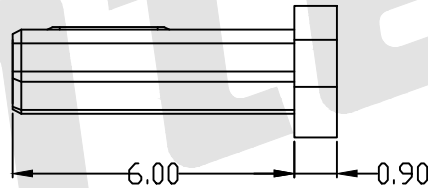
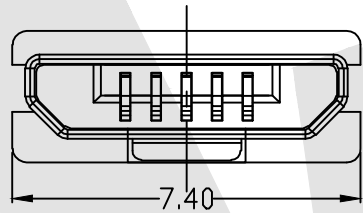
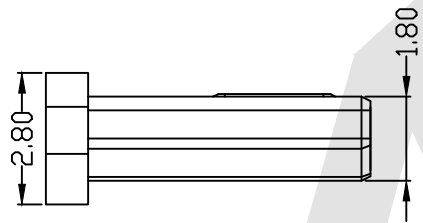


HSF

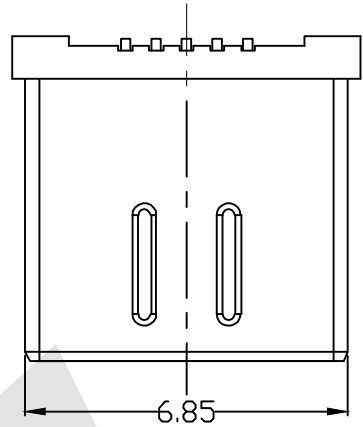

SPECIFICATIONS:

1. MATERIAL:

- 1.1 HOUSING:LCP, COLOR:BLACK
- 1.2 CONTACT:Phosphor Bronze T=0.2mm, Gold/Tin Plated
- 1.3 SHELL:Brass,Nickel Plated

2. ELECTRICAL CHARACTERISTICS:

- 2.1 RATED CURRENT (MAX) :0.5A
- 2.2 RATED VOLTAGE (MAX) :100V AC
- 2.3 CONTACT RESISTANCE:50MILLIOHMS MAX
- 2.4 INSULATION RESISTANCE:100MEGOHMS MINIMUM
- 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC AT SEA LEVEL

Ordering Code:

MUMM01 - X - L - X - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② Shell Material:
B:Brass
S:stainless steel
- ③ Insulator Material:
L:LCP
- ④ Contact Material:
B:Brass
P:phosphor copper
- ⑤ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ⑥ Packing
A:Tray
B:Bag
C:Tube
D:Tape & Reel


Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 04/06/2019
CHECK BobYang	DATE 04/06/2019

TITLE:
Micro USB 5P Plug SMT Type,H=6.9mm

DRAWING NO: MUMM01-XLXXX
 PRODUCT NO: MUMM01-XLXXX



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		