


HSF

ROHS

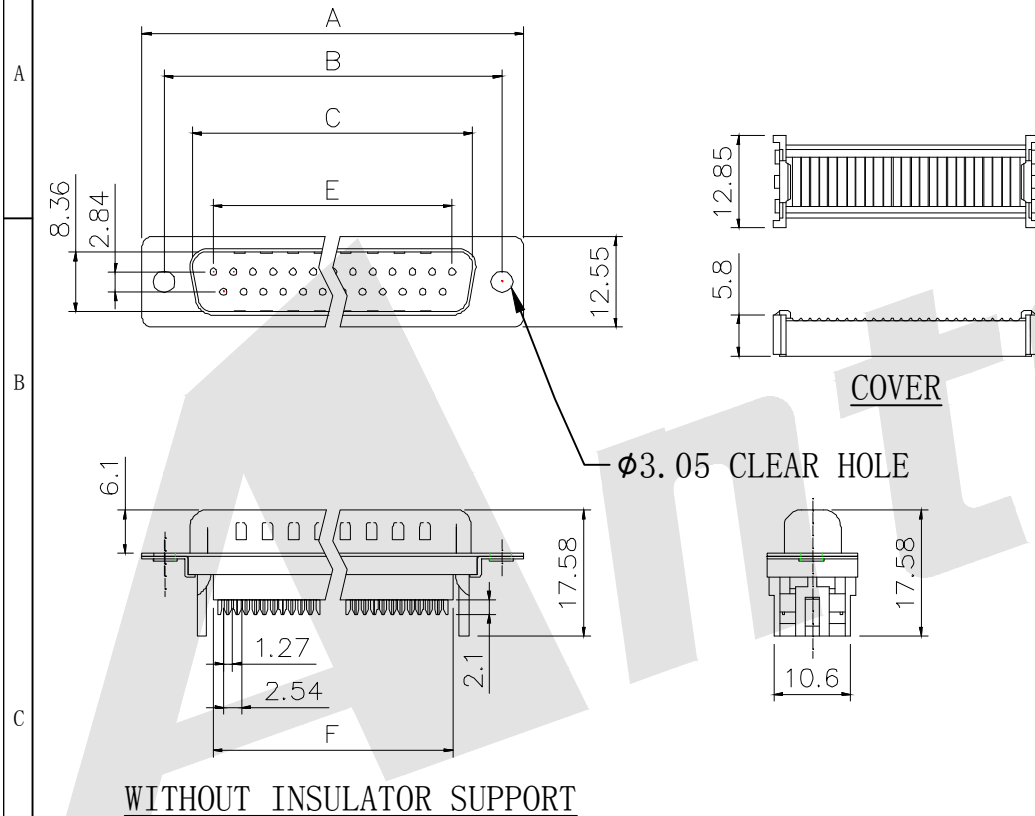

SPECIFICATIONS:

1. Electrical Characteristic:

- 1.1 Current rating:3 AMP
- 1.2 Voltage rating:250V AC/RMS 60HZ
- 1.3 Contact resistance:20 milliohms
- 1.4 Insulation resistance:1000 magohms at 500V DC
- 1.5 Dielectric withstanding voltage:1000V AC/RMS 60HZ For 1 minute

2. Material:

- 2.1 Insulator:Glass-filled thermoplastic PBT,UL94V-0
- 2.2 Contact:Copper alloy
- 2.3 Shell:Steel,80u" nickel over 50u" min copper

Ordering Code:

DIDC03 - M - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Dual Row IDC Type
- ② Contact Type:
L:Blue
M:Male
- ③ Contact NO. :
09=09pin 15=15pin
25=25pin 37=37pin
- ④ Contact Plating
S: Selective Gold
S2:Selective 5u" Gold
S4:Selective 15u" Gold
G0: Gold flash
G2: 5u" Gold over
G4: 15u" Gold over
- ⑤ Color Code:
L:Blue
B:Black
- ⑥ Other Option:
A: With S/R(Standard)
B: Without S/R
- S1:Selective 3u" Gold
S3:Selective 10u" Gold
S5:Selective 30u" Gold
G1: 3u" Gold over
G3: 10u" Gold over
G5: 30u" Gold over

Positions	A	B	C	E	F
9Pin	30.81	24.99	16.92	11.08	13.10
15Pin	39.20	33.30	25.25	19.39	20.70
25Pin	53.04	47.04	38.96	33.24	33.68
37Pin	69.40	63.50	55.42	49.86	50.30

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Lv Xun Hua DATE 07/03/2019
 CHECK BobYang DATE 07/03/2019

TITLE: D-SUB Male Dual Row IDC Type (Slim Type)

DRAWING NO: DIDC03-MXXXX

PRODUCT NO: DIDC03-MXXXX



REV	DESCRIPTION	DATE