

HSF



	09pin	15pin	25pin	37pin
A	16.92	25.25	38.96	55.96
B	24.99	33.32	47.04	63.50
C	30.80	39.10	53.00	69.30
D	11.86	19.50	32.15	48.76

Material:

Housing: Temperature Thermoplastics, PBT+G.F UL 94V-0

Contact: Brass or Bronze

Shell: 0.35T Steel Nickel Plating All Area

Electical Characteristics:

Current Rating: 5A

Contact Resistance: 20 milliohms Max

Withstanding Voltage: 500V AC For 1 Minute

Insulation Resistance: 1000 Megohms Min

Operating Temperature: -55° C to +105° C

Ordering Code:

DIDC02 - M - X - S - X - X
 ① ② ③ ④ ⑤ ⑥

① Dual Row IDC Type

② Contact Type:

M: Male

③ Contact NO.:

09=09pin

15=15pin

25=25pin

37=37pin

④ Contact Plating

S: Selective Gold

S2: Selective 5u" Gold

S4: Selective 15u" Gold

G0: Gold flash

G2: 5u" Gold over

G4: 15u" Gold over

⑤ Color Code:

L: Blue

B: Black

⑥ Other Option:

A: With S/R(Standard)

B: Without S/R

S1: Selective 3u" Gold


S3: Selective 10u" Gold

S5: Selective 30u" Gold

G1: 3u" Gold over

G3: 10u" Gold over

G5: 30u" Gold over

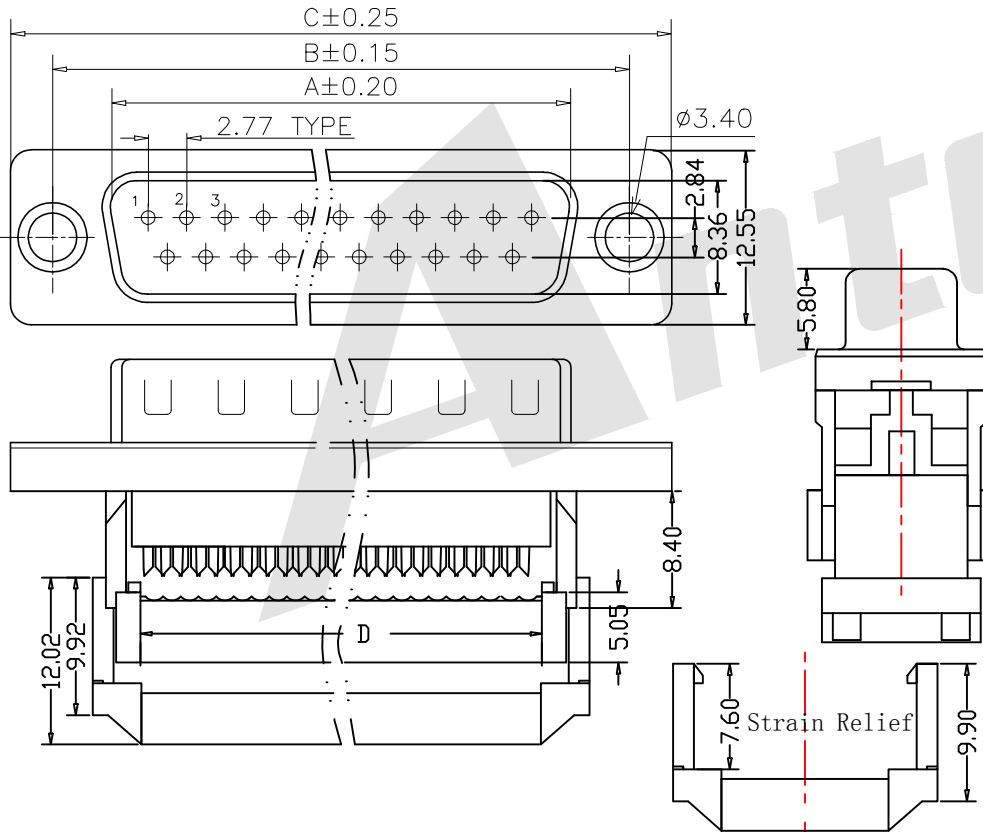

Unless Otherwise specified tolerance	
X. ±0.35	X.XX: ±0.20
X.X: ±0.25	X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 07/03/2019
CHECK BobYang	DATE 07/03/2019

Antenk ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: D-SUB Male Dual Row IDC
 Exterior Button Type(stamped Pin)



DRAWING NO: DIDC02-MXSXX

PRODUCT NO: DIDC02-MXSXX

REV	DESCRIPTION	DATE