
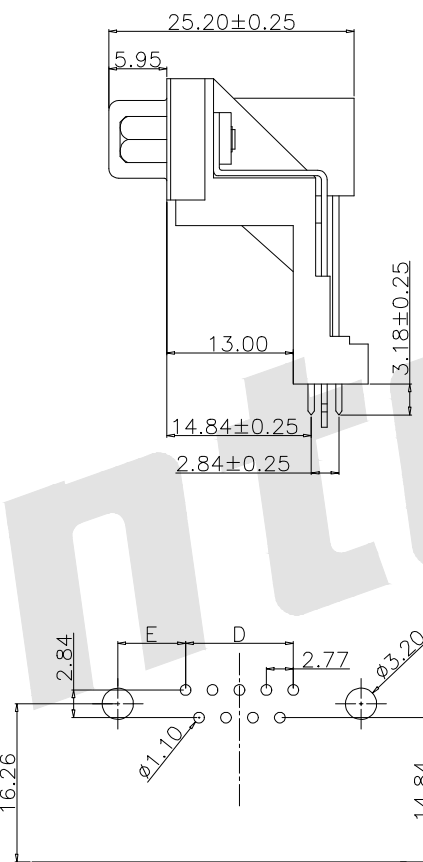
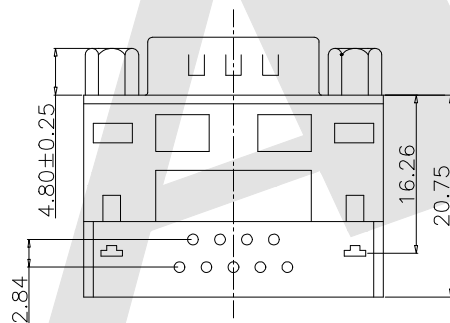


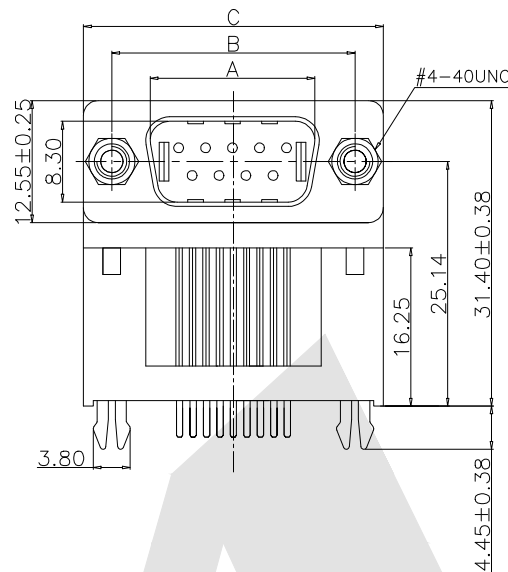

PCB LAYOUT

09	16.92	24.99	30.81	11.08	6.96
15	25.25	33.32	39.14	19.39	6.96
25	38.96	47.04	53.04	33.24	6.9
37	55.42	63.50	69.32	49.86	6.82
No. of Contact	A±0.25	B±0.13	C±0.38	D	E

MATERIAL:

INSULATOR:PBT+30%GLASS Fiber(UL94V-0)

Contact:BRASS

Contact Plated:1u"/15u"/30u" Selective gold plated over Nickel Shell: SPCC-SD

Shell Plated: cu 60u"/Ni 100-120u" and cu 60u"/Sn100-120u"

Current Rating: 5 AMPS

Operation Temperature: -55℃~+105℃

Contact resistance: 25 Milli OHM Max

Insulation Resistance: 1000MW Min AT 500V DC

Dierectric Strength : 500V for one minute

Ordering Code:

DR06 - M - X - X - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

①MDR Series

②Contact Type:
M:Male

③Contact NO. :
09=09pin 15=15pin
25=25pin 37=37pin

④Mounting Option:
A: Fork lock
B: Riveting
C: Riveting With screws
D: Rivet lock

⑤Accessories:
0: Non Accessories
A: Zinc alloy 4.8mm Nickel
A1:Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1:Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1:Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1:Copper screw 5.8mm Nickel

⑥ Color Code:
W:White L:Blue
B:Black G:Grey

⑦Contact Plating
S: Selective Gold
S1:Selective 3u" Gold
S2:Selective 5u" Gold
S3:Selective 10u" Gold
S4:Selective 15u" Gold
S5:Selective30u" Gold
G0: Gold flash
G1: 3u" Gold over
G2: 5u" Gold over
G3: 10u" Gold over
G4: 15u" Gold over
G5: 30u" Gold over

Unless Otherwise specified tolerance
X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
DRAW Lv Xun Hua DATE 09/03/2019
CHECK BobYang DATE 09/03/2019



 ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
D-SUB PCB Male Dual Row Right Angle

DRAWING NO: DR06-MXXXXX

PRODUCT NO: DR06-MXXXXX

DESCRIPTION

DATE

REV