
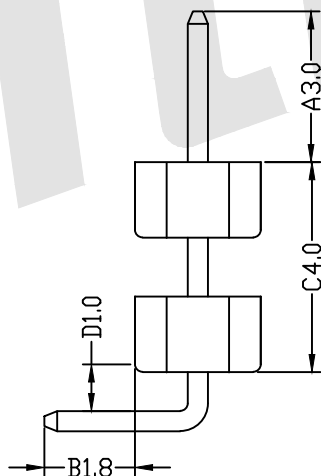
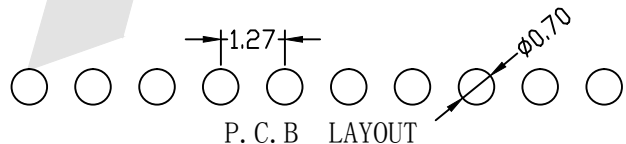
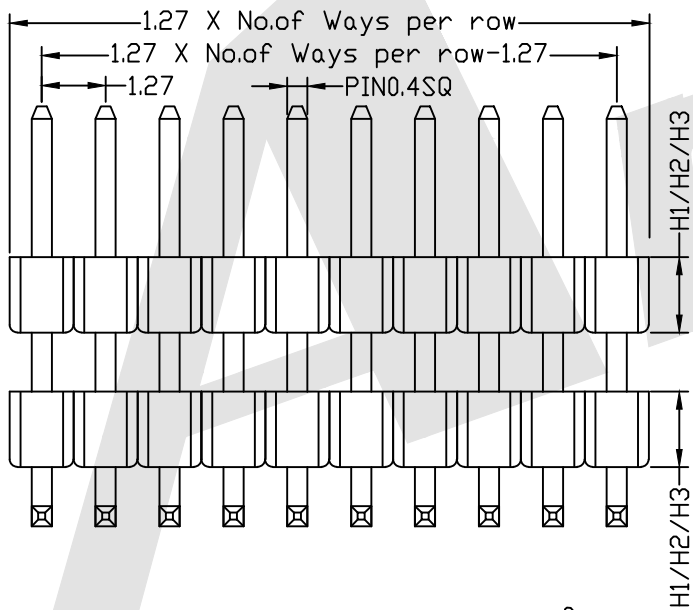


HSF

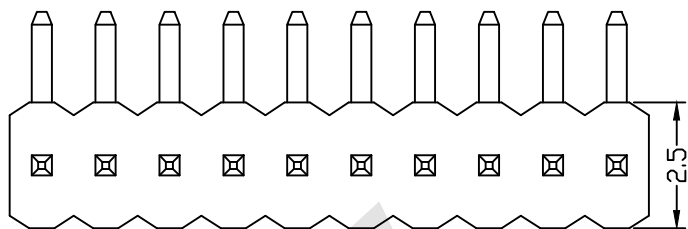

SPECIFICATIONS:

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0, Black

Ordering Code:

PHCR04 - X - X - S - A-C-D-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contact: 01 To 50
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN: Tin
- ④ Connector Type:
 S: Single Row
- ⑤ Pin Length:
 A: 0300=3.00mm
 C: 0400=4.00mm
 D: 0100=1.00mm
 B: 0180=1.80mm
 Please mark the desired length in the A/C/D/B
- ⑥ Insulator Material:
 B: PA6T
 C: LCP
 E: PA9T
- ⑦ Packing:
 A: Tray B: Bag
 T: Tube U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP
- ⑧ Plastic High:
 H1: 0.65mm
 H2: 1.50mm
 H3: 2.00mm

Standard IE P/N :

PHCR04-10 - G0 - S - 0300-0400-0100-0180 - B - B - H2

A	C	D	B	Unless Otherwise specified tolerance	
3.0	4.0	1.0	1.8	X. XX: ±0.20	X. XXX: ±0.15
Optional				SCALE: As Shown	UNIT: mm

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

DRAW	YG ZHONG	DATE	12/11/2015
CHECK	BobYang	DATE	12/11/2015
REV	2016/10/25	DATE	
Increase packing method and material			
DESCRIPTION			

TITLE: 1.27mm Pin Header Single Row Double Plastic Angle Type
 DRAWING NO: PHCR04-XXS-0300-0400-0100-0180-XXX
 PRODUCT NO: PHCR04-XXS-0300-0400-0100-0180-XXX

