

HSF

RoHS





SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65 °C to +125 °C
 Contact Material: Brass
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PHDS06 - X - X - D - A-C-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
02 To 80
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Pin Length:
A:0400=4.00mm
C:0588=5.88mm
B:0280=2.80mm
Please mark the desired length in the A/C/B
- ⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
- ⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
- ⑧ Plastic High
H1:1.5mm
H2:2.0mm

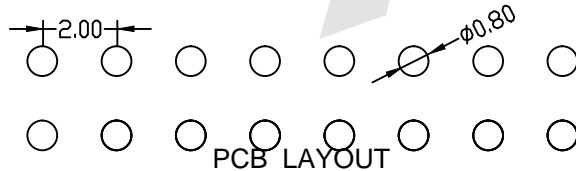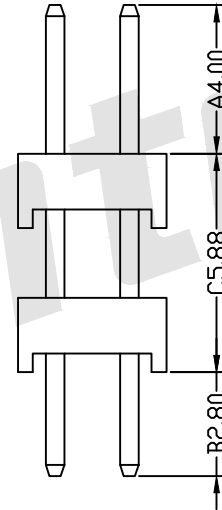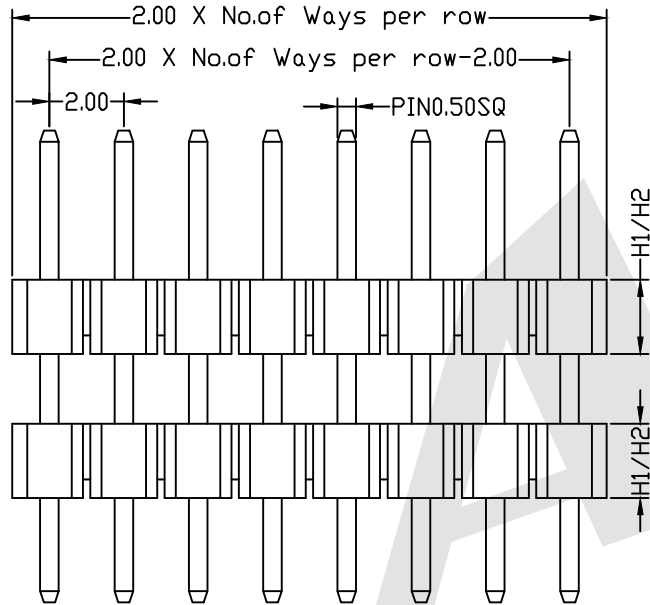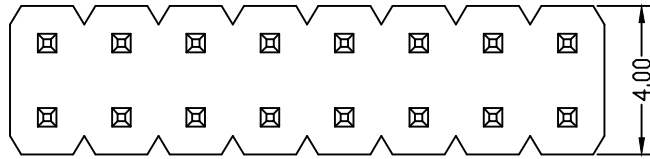

Standard IE P/N : PHDS06-10-G0-D-0400-0588-0280-B-B-H1

A	C	B	Unless Otherwise specified tolerance	
4.00	5.88	2.80	X. ±0.35	X.XX: ±0.20
			X.X: ±0.25	X.XXX: ±0.15
Optional		SCALE:	UNIT:	
		As Shown	mm	
		DRAW	DATE	
		YG ZHONG	01/05/2016	
		CHECK	DATE	
		BobYang	01/05/2016	

ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com


TITLE: 2.00mm Pin Header DualRow Double Plastic Straight Type

DRAWING NO: PHDS06-XXD-0400-0588-0280-XXX

PRODUCT NO: PHDS06-XXD-0400-0588-0280-XXX

Increase packing method and material

2016/10/25



3rd ANGLE PROJECTION

REV	DESCRIPTION		DATE
1	2		3

