

HSF



ROHS

SPECIFICATION




Standard(参考标准): UL IEC
 Voltage Rating(额定电压): 300V 450V
 Current Rating(额定电流): 15A 24A
 Wire range(使用线径): 22-12AWG 2.5mm²
 Withstanding voltage(耐电压): AC2000V/1Min
 Insulation resistance(绝缘电阻): 500MΩ/DC500V
 Temp Rang(温度范围): -40° C ~ +105° C
 Max Torque(最大锁紧力矩): 0.5Nm(4.5lb. in)
 Housing(塑件): PA66, UL94V-0
 Screw(螺丝): Steel, M3.0 Ni-Plated
 Terminal(端子): Brass, 0.8t, Tin Plated
 Pitch(间距): 7.62mm
 Poles(极数): 2P-XXP

Ordering Code:

AT824 - 7.62 - XX - X -01

Pitch: 7.62:7.62mm
 Poles:
 02: 2 Contacts
 03: 3 Contacts

 22: 22 Contacts
 Insulator color:
 A:Green B:Blue
 C:Black G:Gray
 0:Orange T:Transparent
 R:Red Y:Yellow
 W:White
 01:Series number

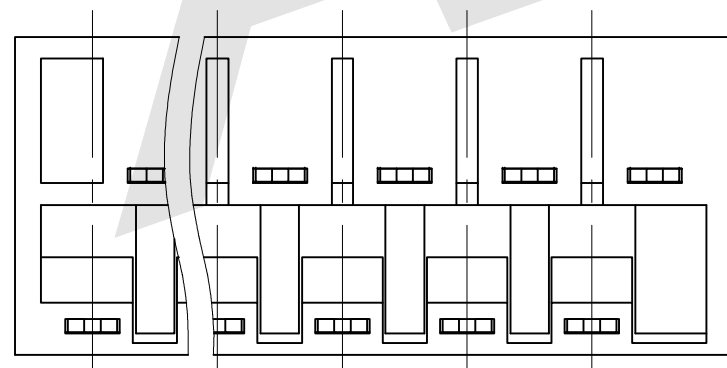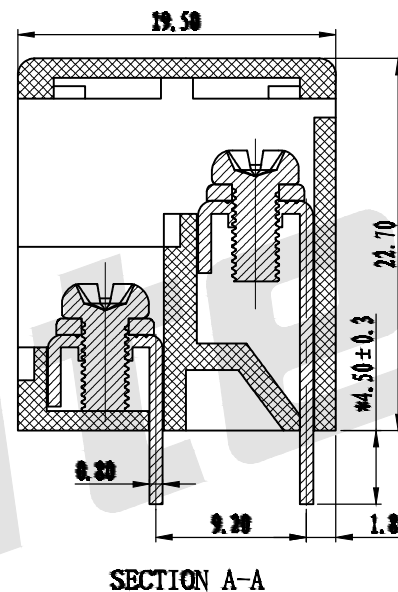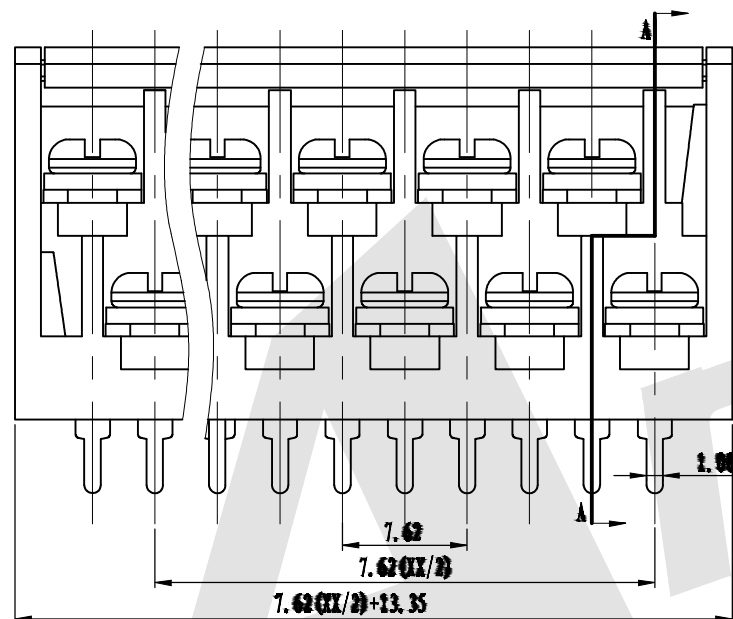

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW: Wu Sai DATE: 22/03/2018
 CHECK: BobYang DATE: 22/03/2018



Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: Barrier Terminal Block Pitch:7.62mm

DRAWING NO: AT824-7.62XXX-01

PRODUCT NO: AT824-7.62XXX-01

REV	DESCRIPTION	DATE
1		
2		
3		