


HSF

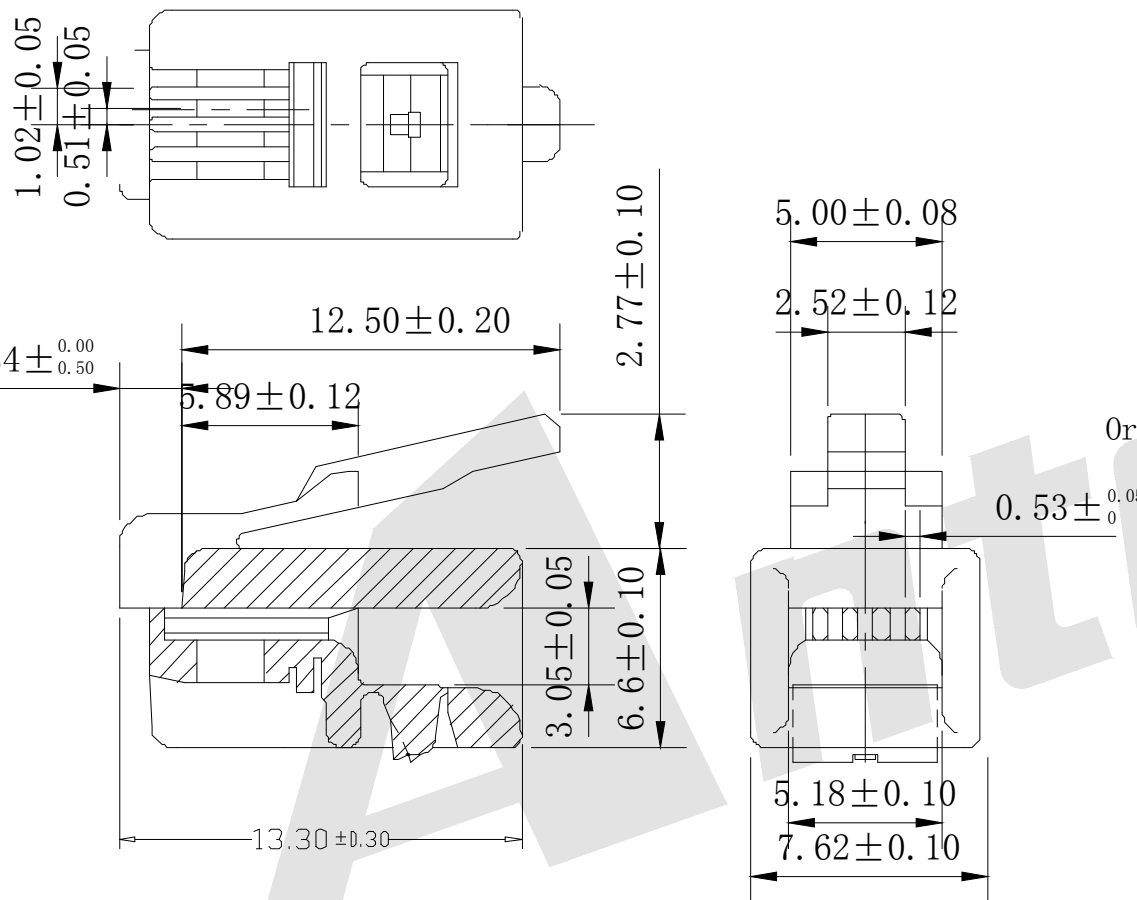

FEATURES:


- 1 Electrical Test:
 - A.250V AC max at 2 amps.
 - B.Dielectric with standing 500volts AC.
 - C.Insulation Resistance:500 megaohms.
 - D.Termination Resistance:35megaohms.
 - 2 Mechanical:
 - A.Cable-to-Plug tensile strength-20LBs(89N)min.
 - B.Durability:500 mating cycles.
- Available for 24 or 26 AWG Wire

Ordering Code:

ATRP4P4C - X - X - X - 001

① ② ③ ④ ⑤

- 1. Series:
- 2. Housing Material:
 - A:UL 94V-0
 - B:UL 94V-2
- 3. Contact Type:
 - A:2 Prongs for stranded wire
 - B:2 prongs for solid wire(SS)
 - C:3 prongs for solid wire(S)
- 4. Gold plating :
 - A:1u" B:3u"
 - C:6u" D:15u"
 - E:30u" F:50u"
- 5. Serial number:

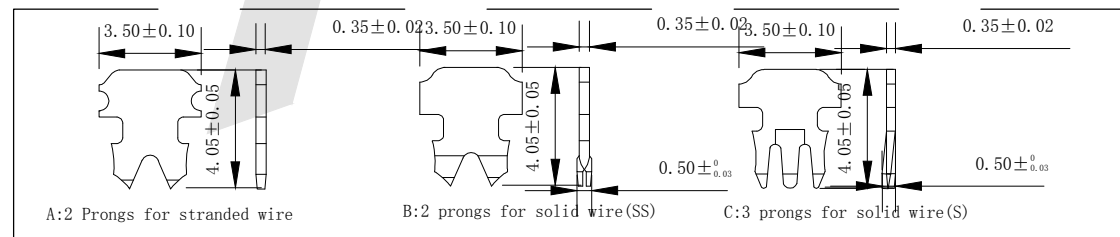


Unless Otherwise specified tolerance
 X. ± 0.35 X.XX: ± 0.20
 X.X: ± 0.25 X.XXX: ± 0.15

Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 16/09/2019
CHECK BobYang	DATE 16/09/2019

TITLE:
 Plug 4P4C Serial unshielded Type

DRAWING NO: ATRP4P4C-XXX-001
 PRODUCT NO: ATRP4P4C-XXX-001



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		