
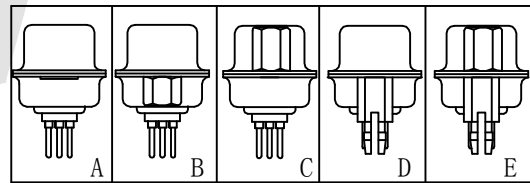
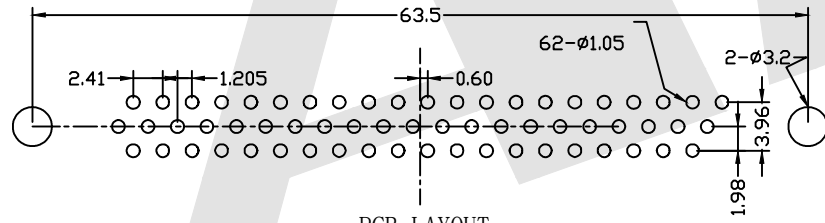
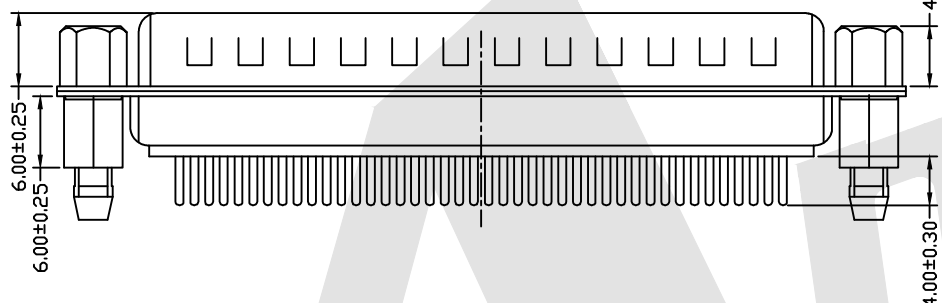



HSF

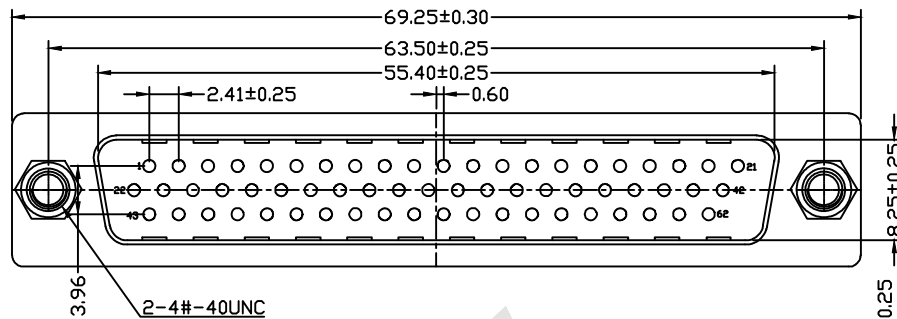

Material:  
 Housing: Temperature Thermoplastics, PBT+G.F UL 94V-0  
 Contact: Brass or Bronze  
 Shell: 0.35T Steel Nickel Plating All Area  
 Electrical Characteristics:  
 Current Rating: 5A  
 Contact Resistance: 20 milliohms Max  
 Withstanding Voltage: 500V AC For 1 Minute  
 Insulation Resistance: 1000 Megohms Min  
 Operating Temperature: -55° C to +105° C

Ordering Code:

HDP01 - M - 62 - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Three Row Straight DIP
- ② Contact Type:  
M: Male
- ③ Contact NO. :  
62=62pin
- ④ Mounting Option:  
A: No accessories  
B: Rear Rivet  
C: Front Rivet  
D: Groundstand-off on real shell  
E: Front rivet+Groundstand-off on real shell
- ⑤ Accessories:  
O: Non Accessories  
A: Zinc alloy 4.8mm Nickel  
A1: Zinc alloy 5.8mm Nickel  
B: Iron 4.8mm Nickel  
B1: Iron 5.8mm Nickel  
C: Copper alloy 4.8mm Nickel  
C1: Copper alloy 5.8mm Nickel  
D: Copper screw 4.8mm Nickel  
D1: Copper screw 5.8mm Nickel
- ⑥ Color Code:  
W: White L: Blue  
B: Black G: Grey
- ⑦ Contact Plating  
S: Selective Gold S1: Selective 3u" Gold  
S2: Selective 5u" Gold S3: Selective 10u" Gold  
S4: Selective 15u" Gold S5: Selective 30u" Gold  
G0: Gold flash G1: 3u" Gold over  
G2: 5u" Gold over G3: 10u" Gold over  
G4: 15u" Gold over G5: 30u" Gold over

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk**® ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail: sales@antenk.com

SCALE: As Shown UNIT: mm  
 DRAW Lv\_Xun Hua DATE 19/03/2019  
 CHECK BobYang DATE 19/03/2019

TITLE: D-SUB 62P PCB Male Three Row Straight (stamped Pin)



DRAWING NO: HDP01-M62XXXX  
 PRODUCT NO: HDP01-M62XXXX

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		