







SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHES06 - X - X - D - A - B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating:
 - G0: Gold flash S0: Selective
 - G1: 3u" Gold S1: Selective 3u"
 - G2: 5u" Gold S2: Selective 5u"
 - G3: 10u" Gold S3: Selective 10u"
 - G4: 15u" Gold S4: Selective 15u"
 - G5: 30u" Gold S5: Selective 30u"
 - SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length:
 - A: 0600=6.00mm
 - B: 0300=3.00mm
 Please mark the desired length in the A/B
- ⑥ Insulator Material:
 - A: PBT
 - B: PA6T
 - C: LCP
 - D: PA46
 - E: PA9T
- ⑦ Packing:
 - A: Tray
 - B: Bag
 - T: Tube
 - U: Tube+CAP
 - R: Tape&Reel
 - W: Tape&Reel+CAP

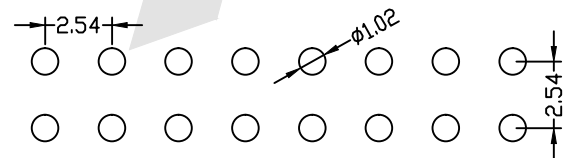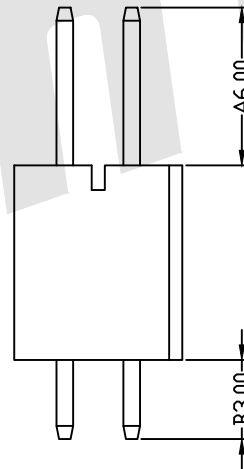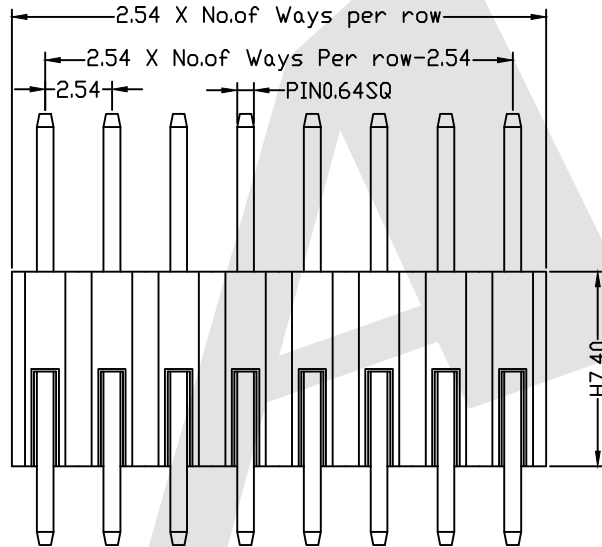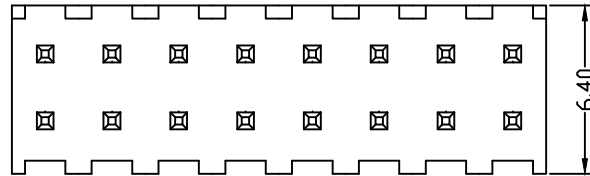

PCB LAYOUT

Standard IE P/N :		PHES06-10-G0-D-0600-0300-A-B	
A	B	Unless Otherwise specified tolerance	
6.00	3.00	X. ±0.35	X. XX: ±0.20
		X. X: ±0.25	X. XXX: ±0.15
Optional	SCALE: As Shown	UNIT: mm	
	DRAW YG ZHONG	DATE 01/05/2016	ANTENK ELECTRONICS CO., LTD Http://www.antenk.com E-mail:sales@antenk.com
	CHECK BobYang	DATE 01/05/2016	
TITLE:		2.54mm Pin Header Dual Row Straight Type (H=7.4)	
DRAWING NO:		PHES06-XXD-0600-0300-XX	
PRODUCT NO:		PHES06-XXD-0600-0300-XX	

REV	DESCRIPTION	DATE
	Increase packing method and material	2016/10/25

