

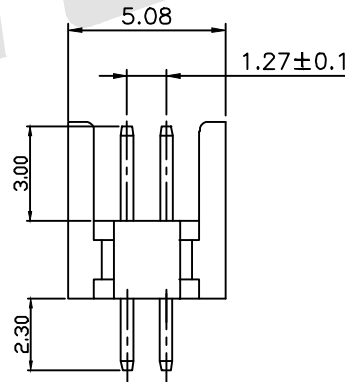
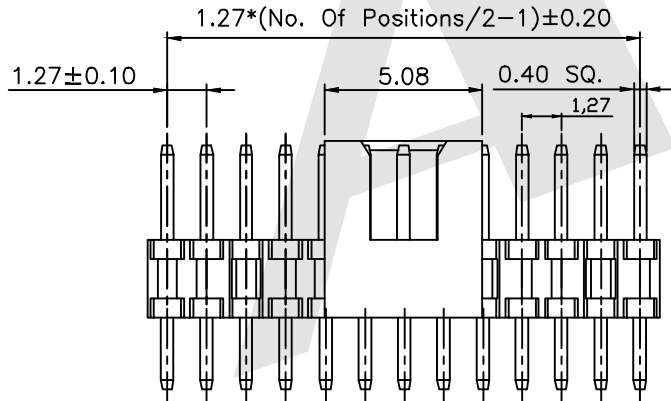


HSF



SPECIFICATION

Current Rating: 1Amp  
 Insulation Resistance: 1000MΩmin  
 Contact Resistance: 20MΩmax  
 Withstand Voltage: 500V AC/DC  
 Contact Material: Brass  
 Contact PlatinSpecifications  
 Current Rating : 1.0 Amp  
 Insulator Resistance : 1000 Megohms Min.  
 Dielectric Withstanding : AC 500 V  
 Operating Temperature : -40° C~ +105°C  
 Soldering Temperature : 260°C for 3~5sec Max.  
 Contact Material : Copper Alloy  
 Insulator Material: High Temperature Thermoplastic. UL 94V-0  
 Standard : Nylon-6T (Black)  
 Standard :Ting: Au or Sn Over Ni  
 Insulator Material: PA6T+30%GF UL 94V-0  
 Operating Temperature: -40° C to +105° C

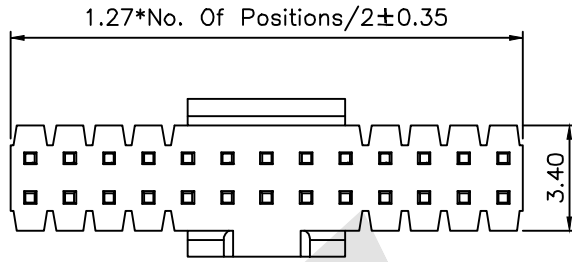

Ordering Code:

BHAS05 - X - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥


- ① Series No:
- ② No. of Contacts  
2-100P
- ③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3u" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u" Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN:Tin
- ④ Color Insulator  
B:Black  
U:Blue  
W:White
- ⑤ Insulator Material  
B:PA6T  
C:LCP  
E:PA9T
- ⑥ Packing  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX:±0.20  
 X.X:±0.25 X.XXX:±0.15

**Antenk** ANTENK ELECTRONICS CO.,LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm  
 DRAW YG ZHONG DATE 01/05/2016  
 CHECK BobYang DATE 01/05/2016

TITLE:  
 1.27\*1.27MM BOX HEADER WITH THE KEY, 180° H=2.54MM



DRAWING NO: BHAS05-XXXXXX  
 PRODUCT NO: BHAS05-XXXXXX

REV	DESCRIPTION	DATE