HSF Pb RoHS

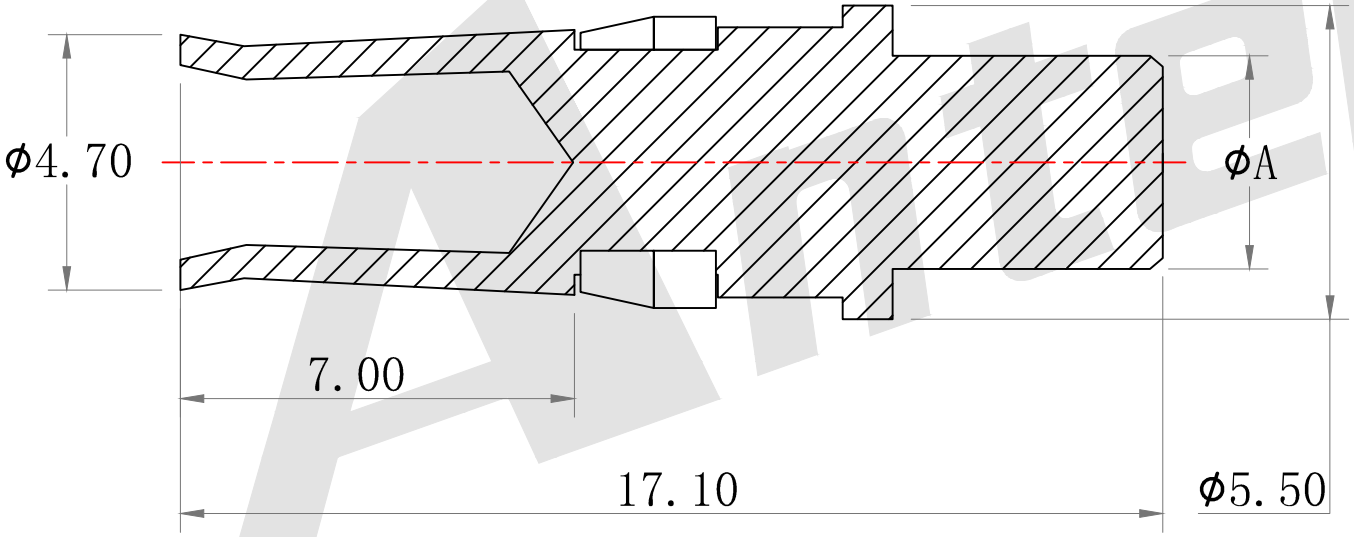

NOTES:
SPECIFICATION:
Contact Retention Force in Housing:10LBS
ELECTRICAL:
Contact Current
Rating:40AMP.30AMP.20AMP.10AMP.
Material:Brass.
Ordering Code:

CP11F - X - D - X
① ② ③

① Series
② Power AMP(ϕA):
1 = 10AMPS = 2.00
2 = 40AMPS = 3.75
3 = 20AMPS = 2.85
4 = 30AMPS = 3.20

③Contact Plating:
G0: Gold flash G1: 3u″ Gold
G2: 5u″ Gold G3: 10u″ Gold
G4: 15u″ Gold G5: 30u″ Gold

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 29/04/2019
CHECK BobYang	DATE 29/04/2019

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
POWER PIN STRAIGHT FEMALE CONTACT
40Aor30Aor20Aor10A (work in coaxial)

DRAWING NO: CP11F-XDX
PRODUCT NO: CP11F-XDX