HSF Pb RoHS

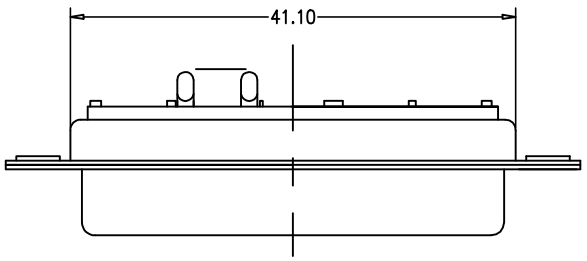

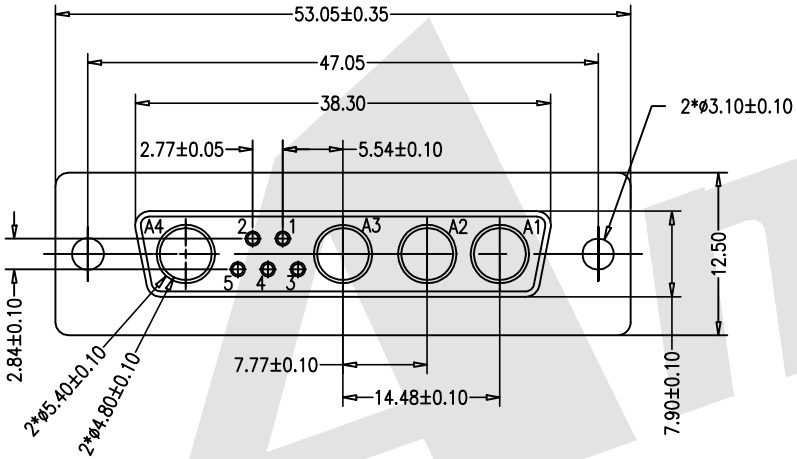



ELECTRICAL CHARACTERISTICS:

Dielectric withstanding Voltage: AC 1000V r.m.s.
Insulation Resistance: 500 Megohms Minimum at DC 500V
Contact Resistance: 25 Milliohms
Operating Temperature: -20℃～+85℃

MATERIALS:

Insulator: PBT,UL 94V-0 Rated
Shell: Cold Roller Steel

Ordering Code:

PDC9W4	-F	-G0	-B	-X
①	②	③	④	⑤

① Series
② Contact Type:
M:Male F:Female
③ Contact NO.:
G0: Gold flash G1: 3u″ Gold
G2: 5u″ Gold G3: 10u″ Gold
G4: 15u″ Gold G5: 30u″ Gold
④ Insulation Color Code:
B:Black L:Blue
W:White
⑤ Mounting Option:
A: Through-hole
B: 2.55″Threaded insert
C: 6.80″Threaded rear spacer
D: 10.3″Threaded rear spacer PCB clip
E: 11.0″Threaded rear spacer PCB clip
F: 11.9″Threaded rear spacer PCB clip



A: Through-hole



B: 2.55″
Threaded insert

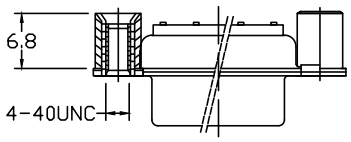

C: 6.80″
Threaded rear spacer

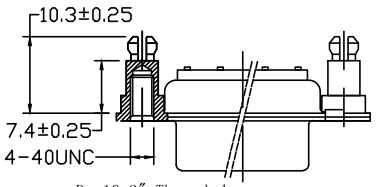

D: 10.3″ Threaded rear spacer
PCB clip PCB thickness 1.6 mm

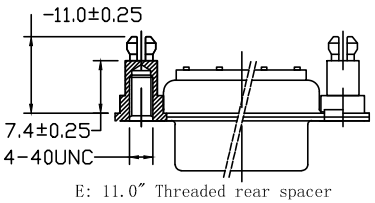

E: 11.0″ Threaded rear spacer
PCB clip PCB thickness 2.3 mm

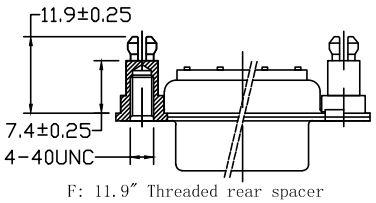

F: 11.9″ Threaded rear spacer
PCB clip PCB thickness 3.2 mm

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 22/05/2019
CHECK BobYang	DATE 22/05/2019

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
Coaxial D-SUB 9W4 FEMALE Solder Cup

DRAWING NO: PDC9W4-FXXX
PRODUCT NO: PDC9W4-FXXX