

HSF






SPECIFICATION

Current Rating: 3.0 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

FHES03 - X - X - S - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
01 To 40
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN: Tin
- ④ Connector Type
S: Single
- ⑤ Plastic High:
H: 5.0
Please mark the desired length in the H
- ⑥ Insulator Material
 A: PBT
 B: PA6T
 C: LCP
 D: PA46
 E: PA9T
 ⑦ Packing
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP

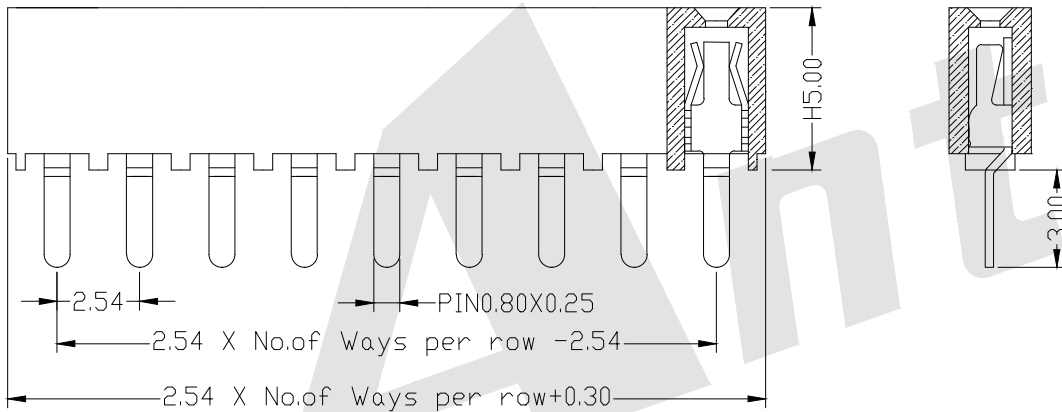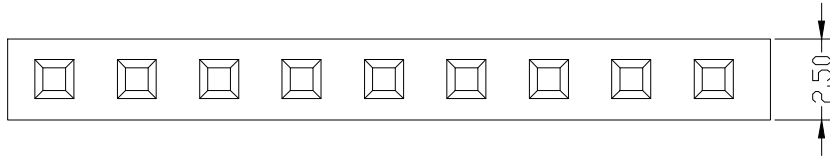

PCB LAYOUT

Unless Otherwise specified tolerance

X. ±0.35	X. XX: ±0.20
X. X: ±0.25	X. XXX: ±0.15

SCALE: As Shown UNIT: mm


DRAW YG ZHONG	DATE 01/05/2016
CHECK BobYang	DATE 01/05/2016

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
2.54mm Female Header Single Row Straight Type

DRAWING NO: FHES03-XXSXXX

PRODUCT NO: FHES03-XXSXXX



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		