

HSF







# SPECIFICATION

Current Rating: 1.5Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PA6T UL 94V-0 Black

Ordering Code:

FHDR06 - X - X - D - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No:
- ② No. of Contacts  
02 To 80
- ③ Contact Plating:  
 G0: Gold flash S0: Selective  
 G1: 3u" Gold S1: Selective 3u"  
 G2: 5u" Gold S2: Selective 5u"  
 G3: 10u" Gold S3: Selective 10u"  
 G4: 15u" Gold S4: Selective 15u"  
 G5: 30u" Gold S5: Selective 30u"  
 SN: Tin
- ④ Connector Type  
D: Dual
- ⑤ Plastic High:  
H: 7.2  
Please mark the desired length in the H
- ⑥ Insulator Material  
 B: PA6T  
 C: LCP  
 D: PA46  
 E: PA9T
- ⑦ Packing  
 A: Tray  
 B: Bag  
 T: Tube  
 U: Tube+CAP  
 R: Tape&Reel  
 W: Tape&Reel+CAP

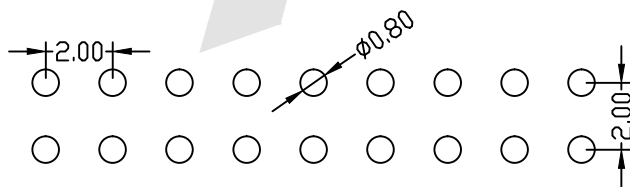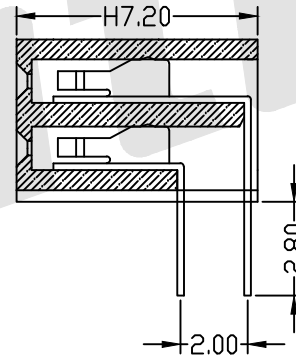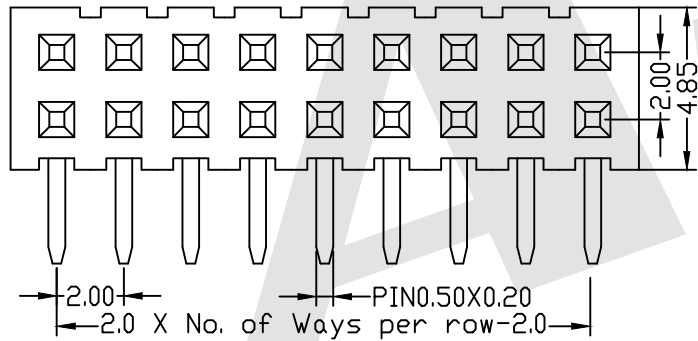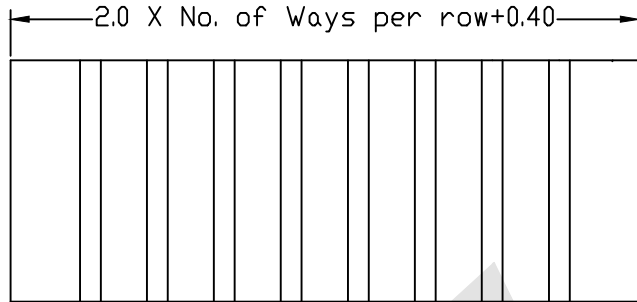

PCB LAYOUT

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm  
 DRAW YG ZHONG DATE 01/05/2016  
 CHECK BobYang DATE 01/05/2016



**Antenk** ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail: sales@antenk.com

TITLE:  
2.00mm Female Header Dual Row Angle Type

DRAWING NO: FHDR06-XXDXXX

PRODUCT NO: FHDR06-XXDXXX

REV	DESCRIPTION	DATE