


HSF


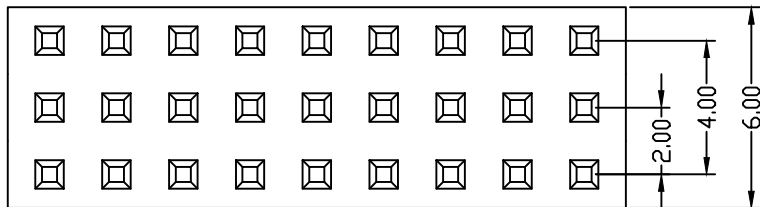


SPECIFICATION


Current Rating: 1.5Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65 °C to +125 °C
 Contact Material: Brass
 Insulator Material: PA6T UL 94V-0 Black

Ordering Code:

FHDS12 - X - X - T - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

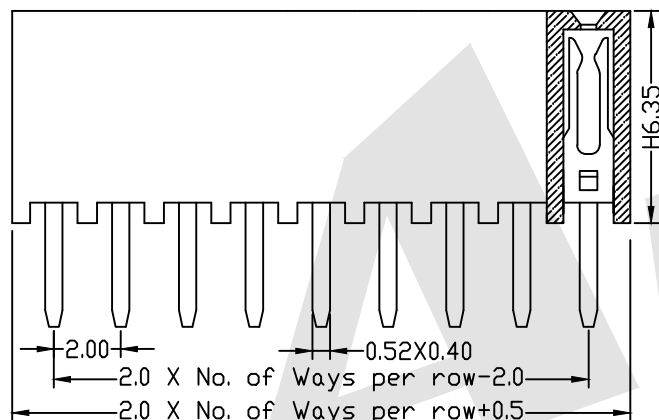

- ① Series No:
- ② No. of Contacts
06 To 120
- ③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3U" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
- ④ Connector Type
T: Three
- ⑤ Plastic High:
H: 6.35
Please mark the desired length in the H
- ⑥ Insulator Material
B: PA6T
C: LCP
D: PA46
E: PA9T
- ⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

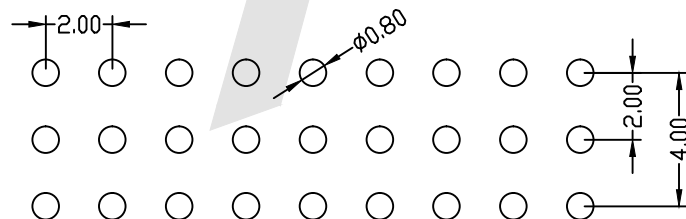


PCB LAYOUT

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW: YG ZHONG DATE: 01/05/2016
 CHECK: BobYang DATE: 01/05/2016

TITLE:
2.00mm Female Header Three Row Straight Type



DRAWING NO: FHDS12-XXTXXX

PRODUCT NO: FHDS12-XXTXXX

REV	DESCRIPTION	DATE