

HSF



ROHS

SPECIFICATIONS:

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65° C to +125° C
Contact Material:	Brass
Insulator Material:	PA6T, UL94V-0 Black

Ordering Code:

PHCR01 - X - X - S - A-D-B - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts:
01 To 50

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type:
S:Single Row

⑤ Pin Length:

A: 0300=3.00mm
D: 0100=1.00mm
B: 0180=1.80mm





Please mark the desired length
in the A/D/B

⑥ Insulator Material:

B:PA6T
C:LCP
E:PA9T

⑦ Packing:

A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

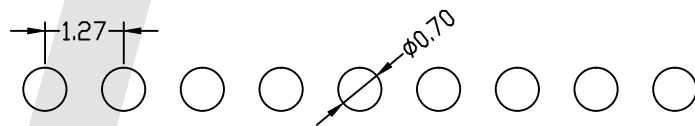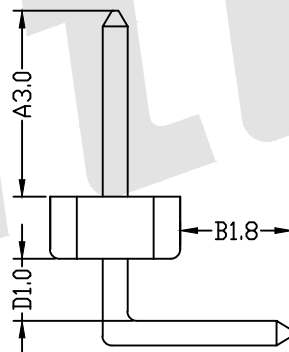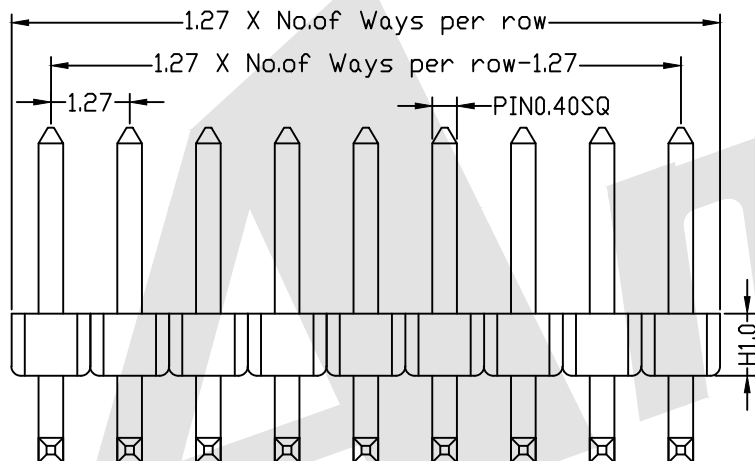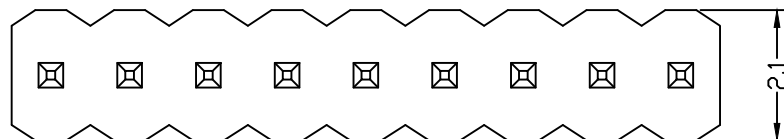

P. C. B LAYOUT

Standard IE P/N :

PHCR01-10 - G0 - S - 0300-0100-0180 - B - B

A	D	B	Unless Otherwise specified tolerance	
3.0	1.0	1.8	X. ±0.35	X.XX: ±0.20
			X.X: ±0.25	X.XXX: ±0.15
Optional			SCALE: As Shown	UNIT: mm
			DRAW YG ZHONG	DATE 12/11/2015
			CHECK BobYang	DATE 12/11/2015




ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 1.27mm Pin Header Single
Row Angle Type

DRAWING NO: PHCR01-XXS-0300-0100-0180-XXX

PRODUCT NO: PHCR01-XXS-0300-0100-0180-XXX



3rd ANGLE PROJECTION

Increase packing method and material

2016/10/25

REV

DESCRIPTION

DATE