







### SPECIFICATION

Current Rating: 7 Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65 °C to +125°C  
 Contact Material: Brass  
 Insulator Material: LCP,UL 94V-0 Black

#### Ordering Code:

PHHS01 - X - X - S - A-B - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No.of Contacts  
02 To 40
- ③ Contact Plating:  
G0:Gold flash S0:Selective  
G1:3U" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u "Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN:Tin
- ④ Connector Type  
D:Double
- ⑤ Pin Length:  
A:1150=11.50mm  
B:0320=3.20mm  
Please mark the desired length in the A/B
- ⑥ Insulator Material  
B:PA6T  
C:LCP  
E:PA9T
- ⑦ Packing:  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP

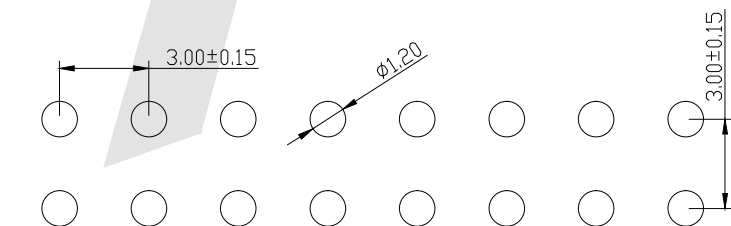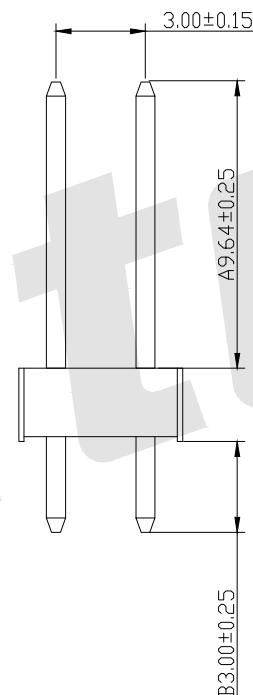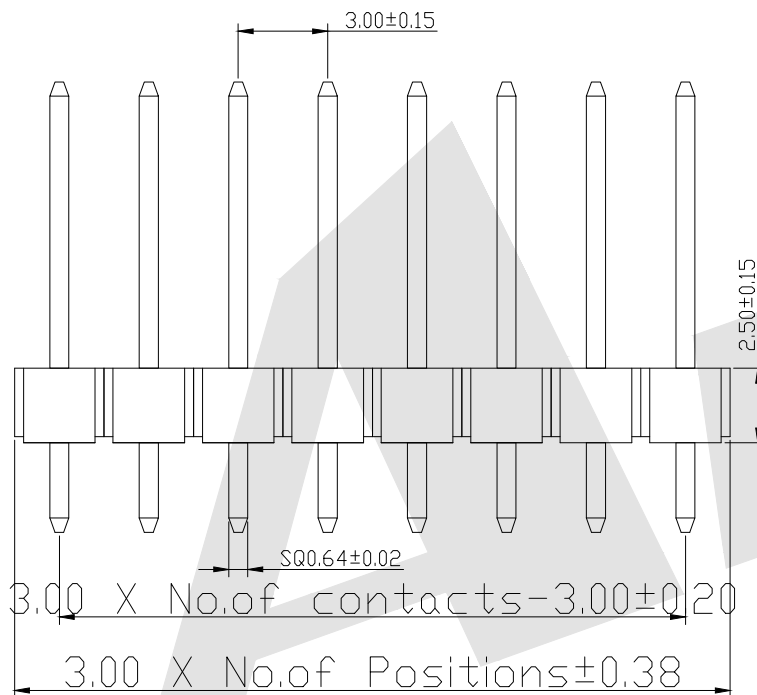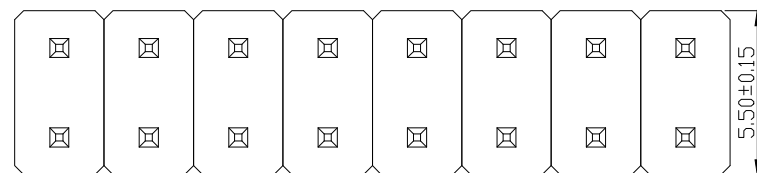

Standard IE P/N :		PHHS01-16-G0-D-0964-0300-B-B	
A	B	Unless Otherwise specified tolerance	
11.5	3.2	X. ±0.35	X.XX: ±0.20
		X.X: ±0.25	X.XXX: ±0.15
Optional	SCALE: As Shown	UNIT: mm	ANTENK ELECTRONICS CO.,LTD <a href="http://www.antenk.com">Http://www.antenk.com</a> E-mail:sales@antenk.com
	DRAW Wu Feng Rong	DATE 23/09/2019	
	CHECK BobYang	DATE 23/09/2019	
TITLE:		3.0 Pin Header DUAL ROW STRAIGHT TYPE	
DRAWING NO:	PHIS01-XXS-A-B-XX		
PRODUCT NO:	PHIS01-XXS-A-B-XX		

	Increase packing method and material			2016/10/25
REV	DESCRIPTION			DATE

