


HSF



ROHS

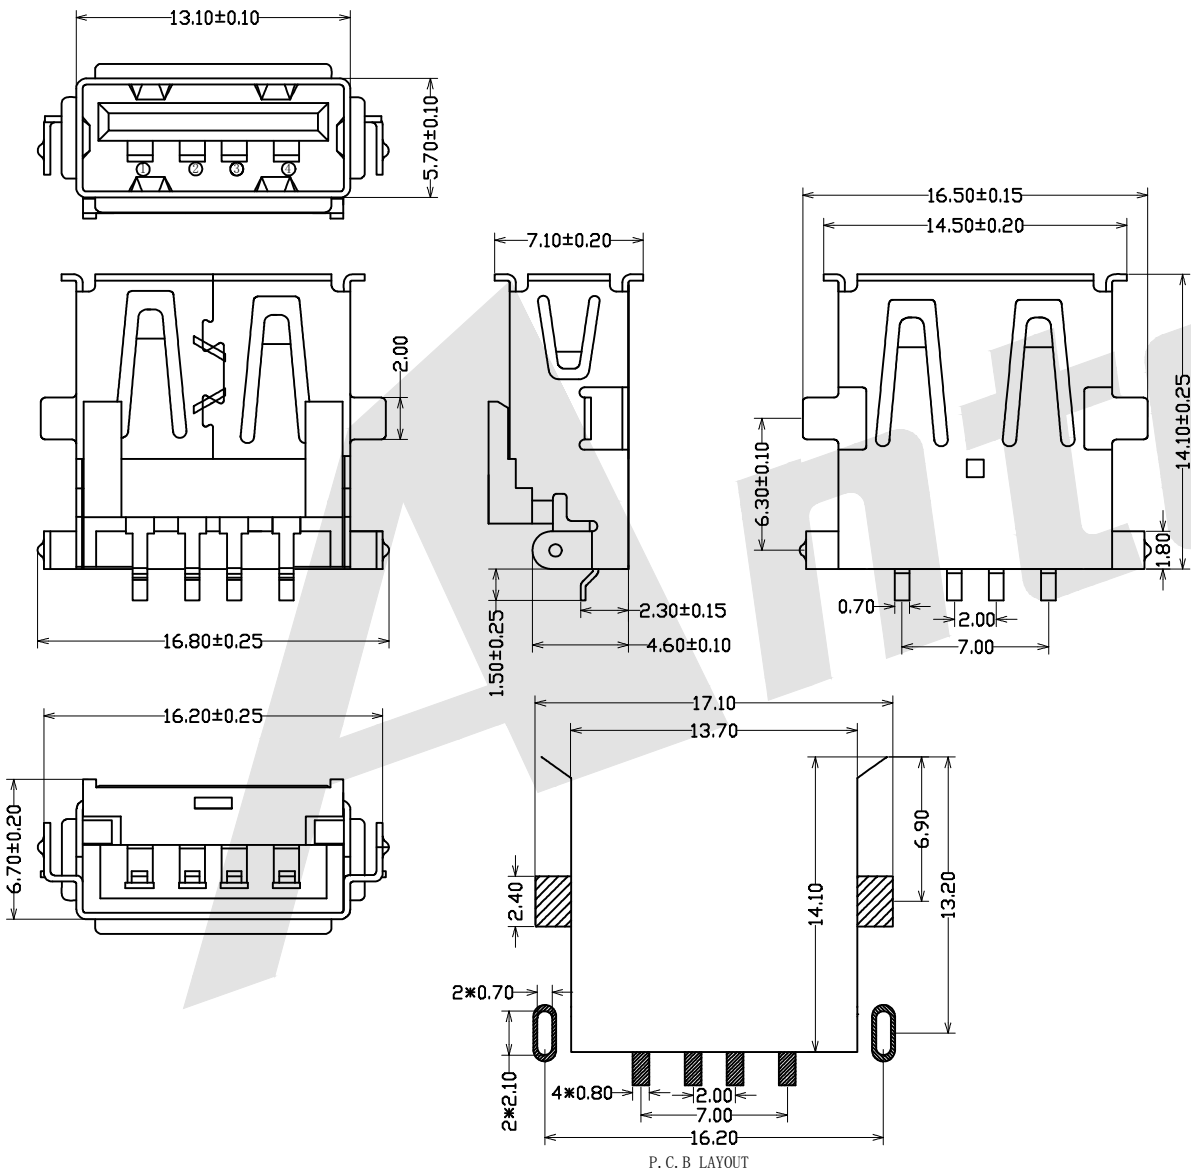

Specifications:

Current Rating: 1.5A Max
 Contact Resistance: 30 milliohms MAX
 Dielectric Withstanding Voltage: 500V AC AT Sea Level
 Insulation Resistance: 1000 Megohms MIN
 Housing: Temperature Thermoplastics, LCP UL 94V-0

Contact: Copper Alloy T=0.25mm Plated Gold in Mating Area;
 Tin On Solder Talls
 Shell: Iron T=0.30mm Nickel/Plating


Ordering Code:

UAFM04 - X - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② Shell Material:
 B: Brass I: Iron
 S: stainless steel
- ③ Insulator Material:
 P: PBT+30%GF L: LCP
- ④ Contact Material:
 B: Brass P: phosphor copper
- ⑤ Contact Plating:
 G0: Gold flash
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
- ⑥ Color Insulator:
 A: White B: Black
- ⑦ Packing:
 A: Tray B: Bag
 C: Tube D: Tape & Reel

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW: Lv Xun Hua DATE: 17/06/2019
 CHECK: BobYang DATE: 17/06/2019



Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: USB A FEMALE SINK WITH SMT TYPE, OFFSET 2.3MM

DRAWING NO: UAFM04-XXXXXX

PRODUCT NO: UAFM04-XXXXXX

REV	DESCRIPTION	DATE