






HSF

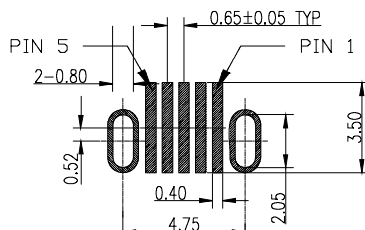



ROHS

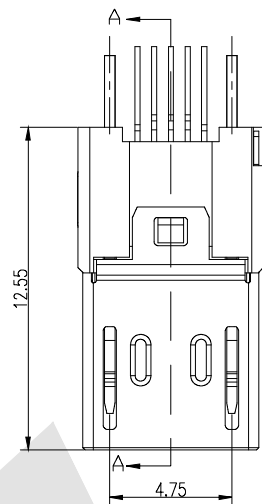

P.C.B LAYOUT
(TOLERANCE:±0.05)

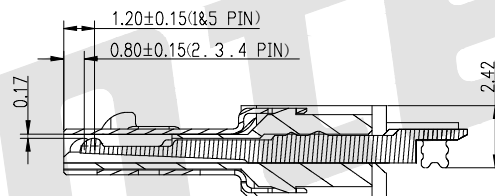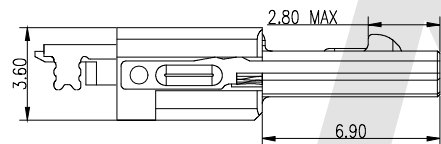

SECTION A-A

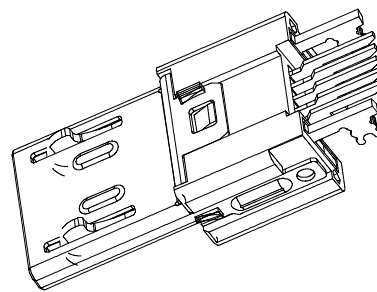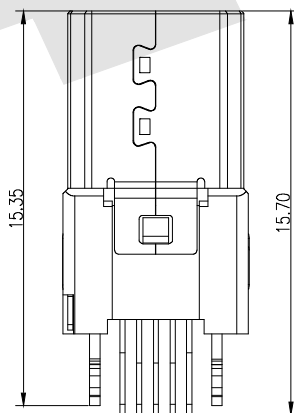

1. Material:

Shell:SUS 301 R-1/4H
Insulator:SEE TABLE+30% G.F. UL94V-0
Hook:SUS 301 R-EH
Contacts:C5191 R-EH

2. Mechanical:

Mating Force:35 N max
Withdrawal Force:8N min initial
Durability :10000 cycles min

3. Electrical:

Current-max(amps) :1.0A
VOLTAGE-max(volts): 30V
Withstanding Voltage:100V AC
Contact Resistance(ohms) :30 milliohms max
Insulation Resistance(ohms) :100 Megohms min

4. Plating:

Contacts:gold 1u"and tin over Nickel Plated
Shell:Nickel over all plating

5. Environmental:

Temperature Range:-30°C~ +80°C

Ordering Code:

MUMS08 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

② Shell Material:

B:Brass
S:stainless steel

③ Insulator Material:

P:PBT+30%GF
L:LCP

④ Contact Material:

B:Brass
P:phosphor copper

⑤ Contact Plating


G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold

⑥ Packing

A:Tray
B:Bag
C:Tube
D:Tape & Reel

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 10/06/2019
CHECK BobYang	DATE 10/06/2019



Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: MICRO USB 5P B TYPE MALE, SLIM WITH SMT+DIP TYPE(LONG TYPE)

DRAWING NO: MUMS08-XXXXX

PRODUCT NO: MUMS08-XXXXX

REV	DESCRIPTION	DATE