
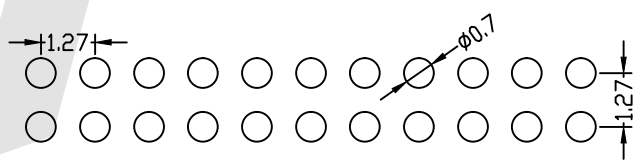
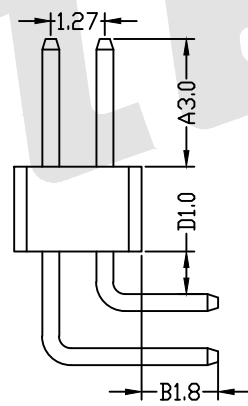
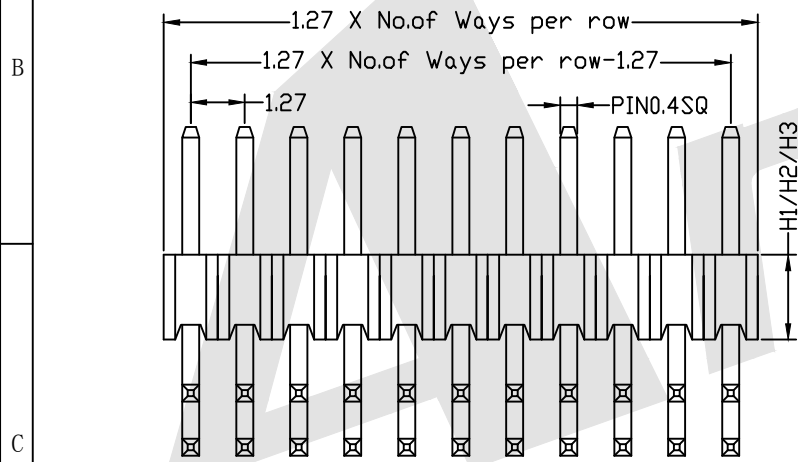


HSF

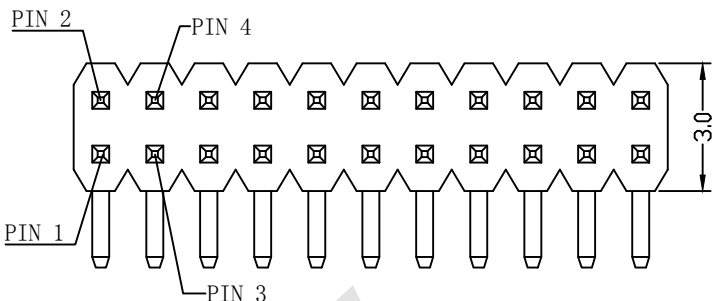

P. C. B LAYOUT

SPECIFICATIONS:

Current Rating: 1Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL94V-0, Black

Ordering Code:

PHCR08 - X - X - D - A-D-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A: 0300=3.00mm
 D: 0100=1.00mm
 B: 0180=1.80mm
 Please mark the desired length in the A/D/B
- ⑥ Insulator Material:
 B:PA6T
 C:LCP
 E:PA9T
- ⑦ Packing:
 A:Tray B:Bag
 T:Tube U:Tape+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ Plastic High:
 H1:1.6mm
 H2:2.0mm
 H3:2.5mm

Standard IE P/N :			PHCR08-10 - G0 -D - 0300-0100-0180 - B - B - H2		
A	D	B	Unless Otherwise specified tolerance		
3.0	1.0	1.8	X. ±0.35	X. XX: ±0.20	
			X. X: ±0.25	X. XXX: ±0.15	
Optional		SCALE:	As Shown	UNIT:	mm
		DRAW	YG ZHONG	DATE	12/15/2015
		CHECK	BobYang	DATE	12/15/2015
TITLE:			1.27mm Pin Header Dual Row Angle Type		
DRAWING NO:			PHCR08-XXD-0300-0100-0180-XXX		
PRODUCT NO:			PHCR08-XXD-0300-0100-0180-XXX		



ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

REV	Increase packing method and material	2016/10/25
	DESCRIPTION	DATE

