

HSF





SPECIFICATION

Current Rating: 7 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: LCP,UL 94V-0 Black

Ordering Code:

PHGS02 - X - X - S - A-C-B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
01 To 40
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
S:Single
- ⑤ Pin Length:
A:1080=10.80mm
C:0740=7.40mm
B:0350=3.50mm
Please mark the desired length in the A/C/B
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing:
A:Tray B:Bag
T:Tube U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

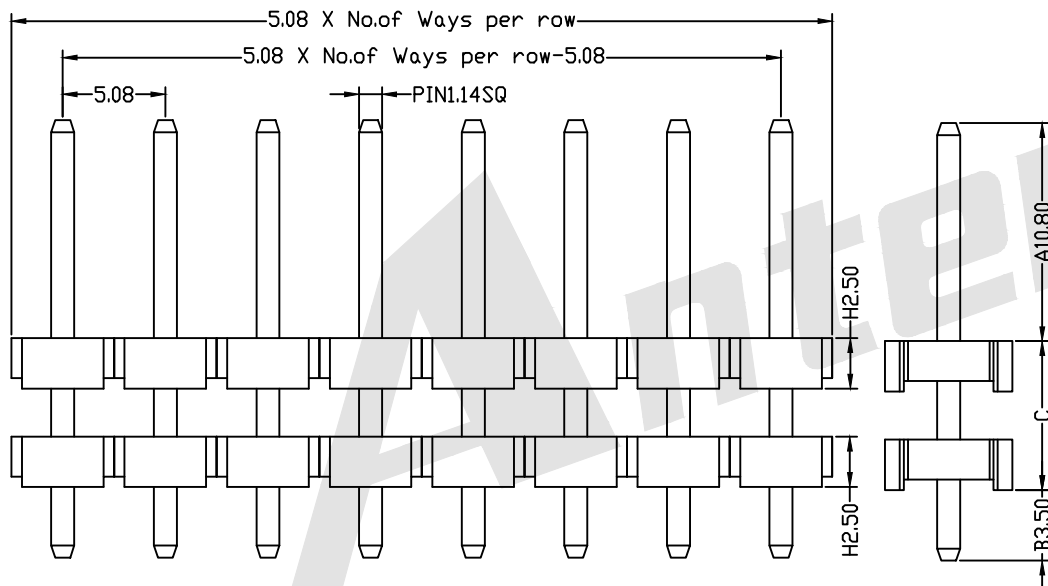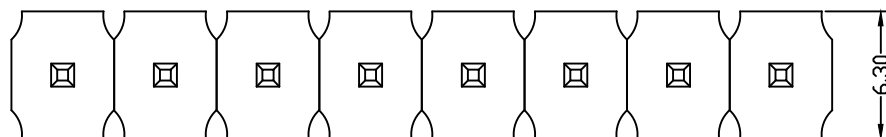

PCB LAYOUT

Standard IE P/N :			PHGS02-10-G0-S-1080-0740-0350-C-B	
A	C	B	Unless Otherwise specified tolerance	
10.8	7.4	3.50	X. ±0.35	X. XX: ±0.20
			X. X: ±0.25	X. XXX: ±0.15
Optional		SCALE: As Shown	UNIT: mm	
DRAW YG ZHONG		DATE 01/05/2016		TITLE: 5.08mm Pin Header Single Row Double Plastic Straight Type
CHECK BobYang		DATE 01/05/2016		

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

REV	Increase packing method and material	2016/10/25	3rd ANGLE PROJECTION		DRAWING NO: PHGS02-XXS-1080-0740-0350-XX
	DESCRIPTION	DATE			PRODUCT NO: PHGS02-XXS-1080-0740-0350-XX