

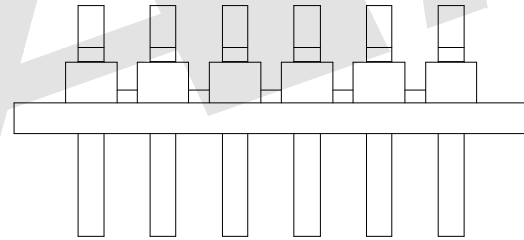



HSF

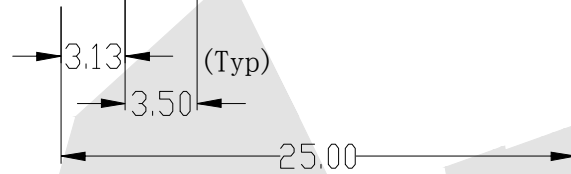

ROHS

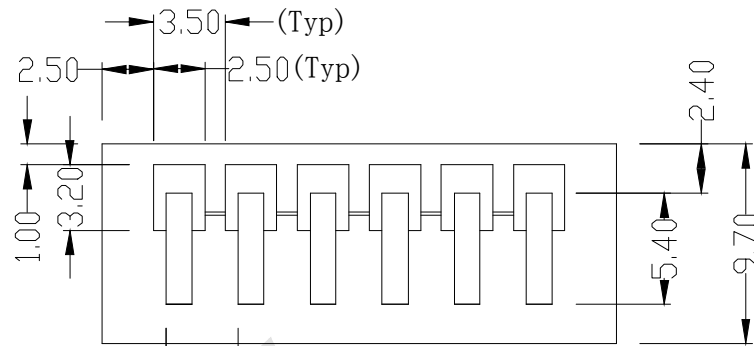

SPECIFICATION:

1. MATERIALS:

- 1.1 Housing:G.F.High Temp THRMOPLASTIC Black.
- 1.2 Contact:0.2 Ref Phosphor Brone
- 1.3 PIN:Brass Alloy 360 1/2 Hard

2. Plating:

- Contact:Nickel 50 Microinch Min Undercoat Overall
- Gold Flash 4 Micrinch Min Over Palladium Nickel
- 40 Micrinch Min IN Contact Area 100 Micrinch Min
- Tin IN Solder Tail Area.
- PIN: 100-200 Micrinch Bright Tin Over 50 Micrinch Area.

3. Parts To Be Packaged In Pvc Tubes.

4. Part To Be Rohs Compatible

5. Nominal Dim At Full Deflection Reference.


Ordering Code:

ABT06 - 06 - L - G - X - D  
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts  
06:06Pin
- ③ Insulator Material:  
P:PBT+30%GF  
L:LCP
- ④ Pitch  
G:1.6mm Pitch
- ⑤ Contact Plating:  
G0:Gold flash  
G1:3u" gold  
G2: 5u" gold  
G3:10u" gold  
G4:15u" gold  
G5:30u" gold
- ⑥ Packing:  
A:Tray  
B:Bag  
C:Tube  
D:Tape Reel

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 22/03/2018
CHECK BobYang	DATE 22/03/2018



**Antenk**® ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

TITLE:  
3.5mm Circuit Battery Connector 6P

DRAWING NO: ABT06-06LGXD

PRODUCT NO: ABT06-06LGXD

REV	DESCRIPTION	DATE