

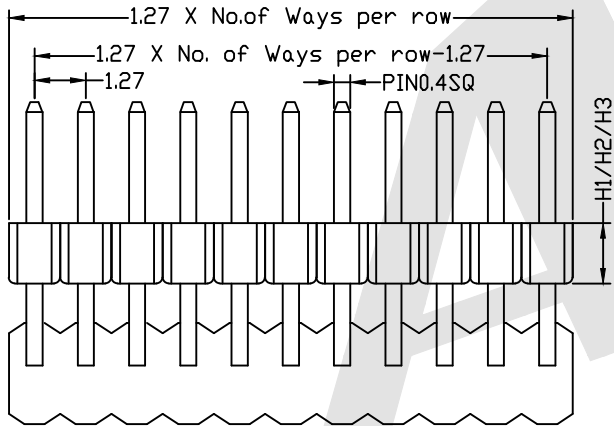


HSF

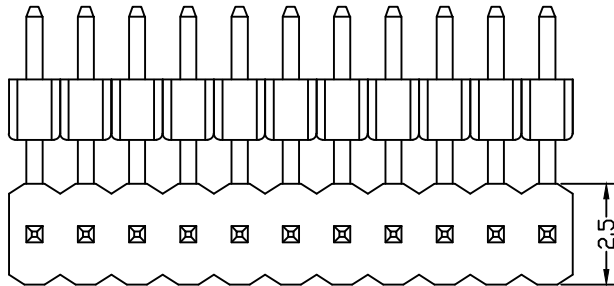

PCB LAYOUT

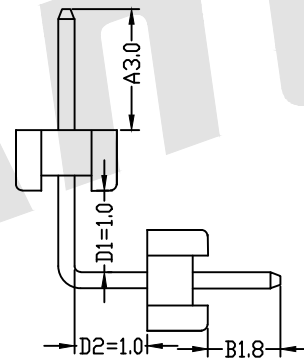

SPECIFICATION

Current Rating: 1Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65° C to +125° C  
 Contact Material: Brass  
 Insulator Material: PA6T, UL 94V-0 Black

Ordering Code:

PHCR06 - X - X - S - A-D1-D2-B - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contact: 01 To 50
- ③ Contact Plating:  
 G0:Gold flash S0:Selective  
 G1:3u" Gold S1:Selective 3u"  
 G2:5u" Gold S2:Selective 5u"  
 G3:10u" Gold S3:Selective 10u"  
 G4:15u" Gold S4:Selective 15u"  
 G5:30u" Gold S5:Selective 30u"  
 SN:Tin
- ④ Connector Type  
 S:Single Row
- ⑤ Pin Length:  
 A: 0300=3.00mm  
 D1: 0100=1.00mm  
 D2: 0100=1.00mm  
 B: 0180=1.80mm  
 Please mark the desired length in the A/D1/D2/B
- ⑥ Insulator Material  
 B:PA6T  
 C:LCP  
 E:PA9T
- ⑦ Packing:  
 A:Tray B:Bag  
 T:Tube U:Tube+CAP  
 R:Tape&Reel  
 W:Tape&Reel+CAP
- ⑧ Plastic High  
 H1:0.65mm  
 H2:1.50mm  
 H3:2.00mm

Standard IE P/N :

PHCR06-10 - G0 - S - 0300-0100-0100-0180 - B - B - H2

A	D1	D2	B	Unless Otherwise specified tolerance	
3.0	1.0	1.0	1.8	X. ±0.35	X.XX: ±0.20
				X.X: ±0.25	X.XXX: ±0.15


Optional	SCALE: As Shown	UNIT: mm
	DRAW YG ZHONG	DATE 12/19/2015
	CHECK BobYang	DATE 12/19/2015

**Antenk** ANTENK ELECTRONICS CO.,LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

TITLE: 1.27mm Pin Header Single Row  
 Double Plastic Angle Type

DRAWING NO: PHCR06-XXS-0300-0100-0100-0180-XXX

PRODUCT NO: PHCR06-XXS-0300-0100-0100-0180-XXX



REV	Increase packing method and material	2016/10/25
	DESCRIPTION	DATE

