



HSF






ROHS

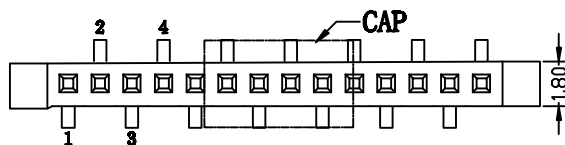

TYPE B

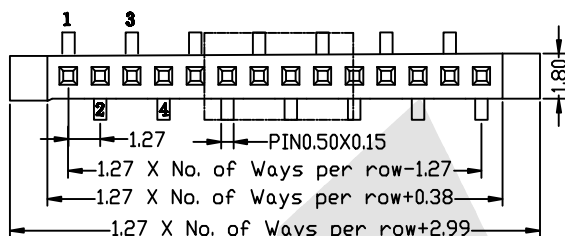

TYPE A

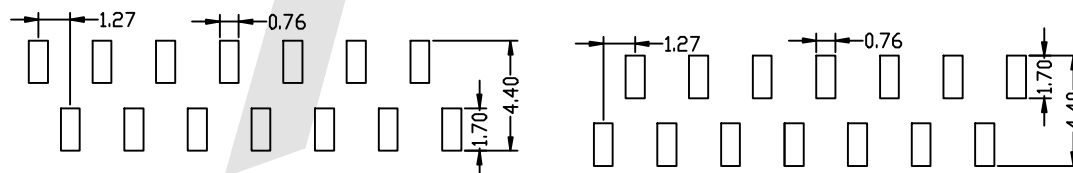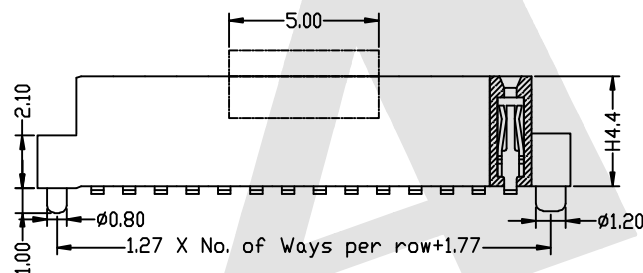

TYPE A

TYPE B

SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65 °C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T UL 94V-0 Black

Ordering Code:

FHCM03 - X - X - S - X - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
01 To 50
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
S:Single
- ⑤ Plastic High:
H:4.4
- Please mark the desired length in the H
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
- ⑧ PCB Layout Option
A:Type A
B:Type B

Unless Otherwise specified tolerance
L: ±0.35 L.XX: ±0.30
L.Y: ±0.25 L.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAWN: YG ZHONG DATE: 01/05/2016

CHECK: BobYang DATE: 01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27mm Female Header Single Row SMT Type With Post

DRAWING NO: FHCM03-XXSXXXX

PRODUCT NO: FHCM03-XXSXXXX



And ANGLE PROJECTION

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8