
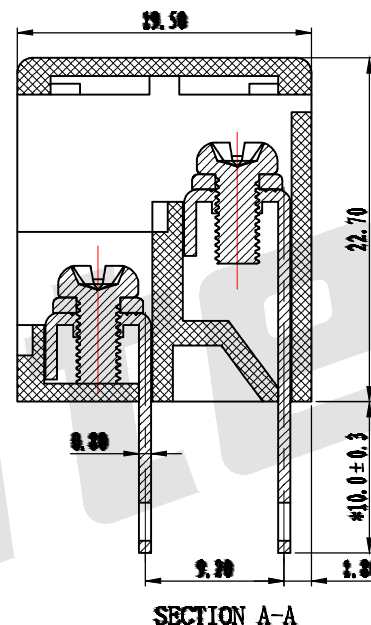


HSF

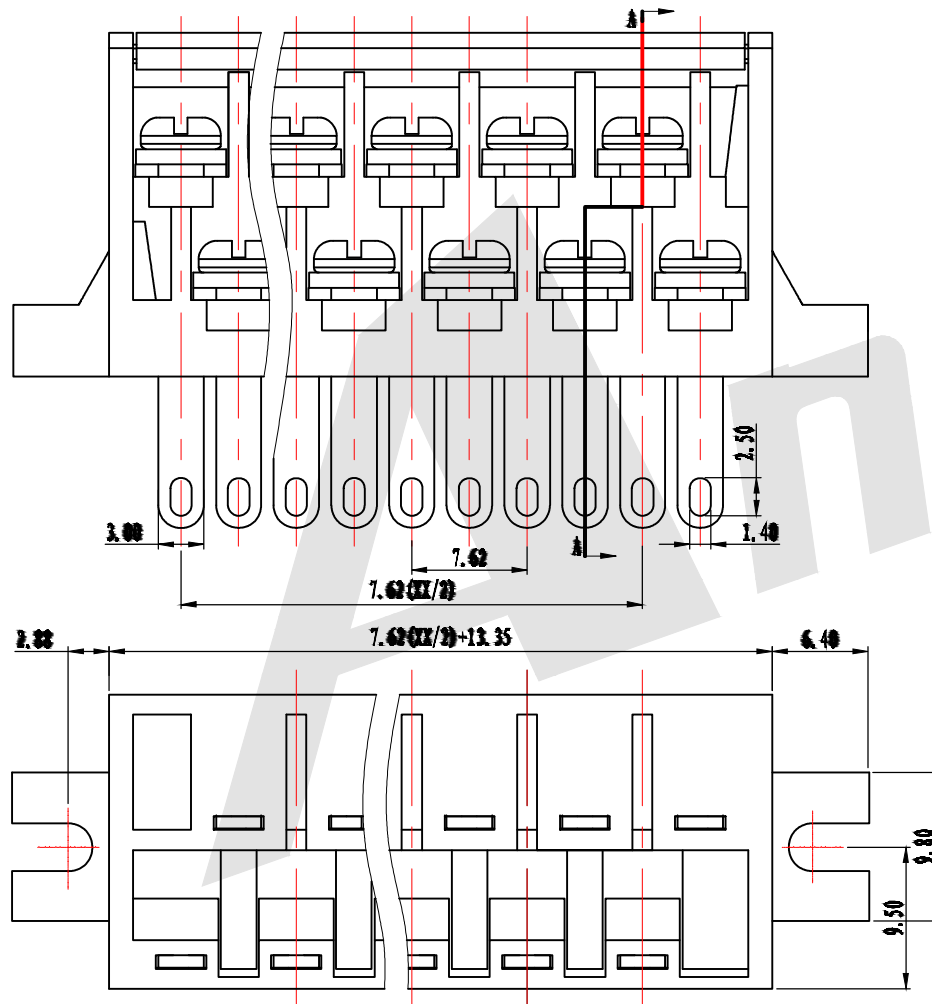

SPECIFICATION

Standard(参考标准): UL IEC
 Voltage Rating (额定电压): 300V 450V
 Current Rating(额定电流): 15A 24A
 Wire range(使用线径): 22-12AWG 2.5mm²
 Withstanding voltage(耐电压): AC2000V/1Min
 Insulation resistance(绝缘电阻): 500MΩ/DC500V
 Temp Rang(温度范围): -40° C ~ +105° C
 Max Torque(最大锁紧力矩): 0.5Nm(4.5lb. in)
 Housing(塑件): PA66, UL94V-0
 Screw(螺丝): Steel, M3.0 Ni-Plated
 Terminal(端子): Brass.0.8t,Tin Plated
 Pitch(间距): 7.62mm
 Poles(极数): 2P-XXP

Ordering Code:

AT824 - 7.62 - XX - X -02

Pitch:
7.62:7.62mm


Poles:
02: 2 Contacts
03: 3 Contacts
...
22: 22 Contacts

Insulator color:
A:Green B:Blue
C:Black G:Gray
O:Orange T:Transparent
R:Red Y:Yellow
W:White

02:Series number.

Unless Otherwise specified tolerance
 X. ±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

SCALE:
As Shown UNIT:
mm
 DRAW
Wu Sai DATE
22/03/2018
 CHECK
BobYang DATE
22/03/2018



ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
Barrier Terminal Block Pitch:7.62mm

DRAWING NO: AT824-7.62XXX-02

PRODUCT NO: AT824-7.62XXX-02

REV

DESCRIPTION

DATE