

HSF







SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHER04 - X - X - D - A - D - B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating: G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length: A:0600=6.00mm
 D:0120=1.20mm
 B:0300=3.00mm
 Please mark the desired length in the A/D/B
- ⑥ Insulator Material: A:PBT
 B:PA6T
 C:LCP
 D:PA46
 E:PA9T
- ⑦ Packing: A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ Plastic High: H1:1.70mm
 H2:2.54mm
 H3:2.00mm
 H4:1.50mm

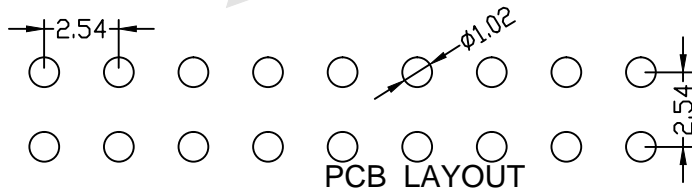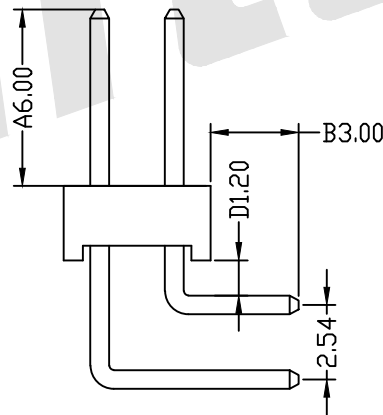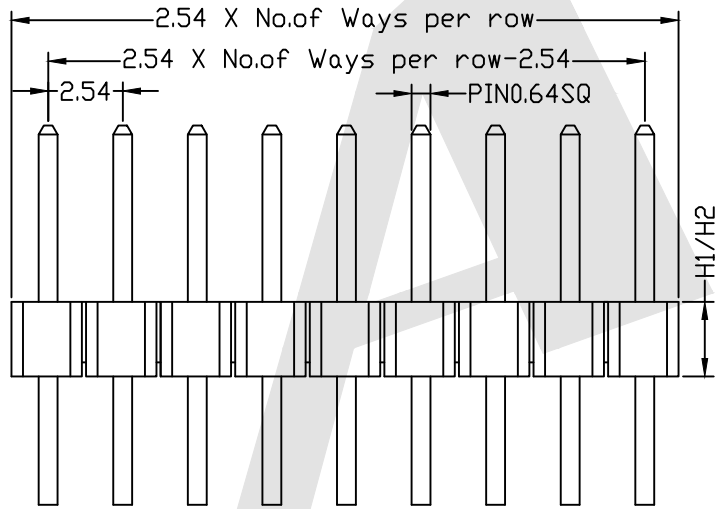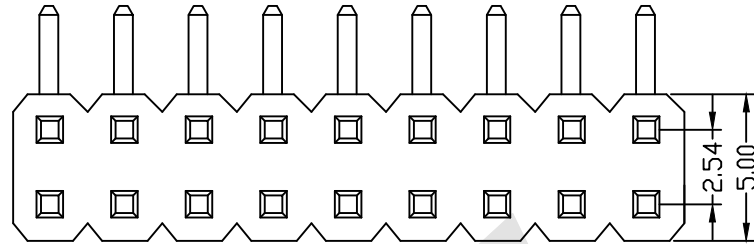

Standard IE P/N :			PHER04-10-G0-D-0600-0120-0300-A-B-H1	
A	D	B	Unless Otherwise specified tolerance	
6.00	1.20	3.00	X. ±0.35	X. XX: ±0.20
			X. X: ±0.25	X. XXX: ±0.15
Optional		SCALE:	UNIT:	
		As Shown	mm	
		DRAW	DATE	
		YG ZHONG	01/05/2016	
		CHECK	DATE	
		BobYang	01/05/2016	

ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE: 2.54mm Pin Header Dual Row Angle Type
 DRAWING NO: PHER04-XXD-0600-0120-0300-XXX
 PRODUCT NO: PHER04-XXD-0600-0120-0300-XXX

REV	ADD H4=1.5MM	2017/04/14	3rd ANGLE PROJECTION
	Increase packing method and material	2016/10/25	
	DESCRIPTION	DATE	