

HSF



ROHS





# SPECIFICATION

Current Rating: 1Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PA6T UL 94V-0 Black

Ordering Code:

FHCS07 - X - X - D - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts  
02 To 100
- ③ Contact Plating:  
 G0:Gold flash S0:Selective  
 G1:3U" Gold S1:Selective 3u"  
 G2:5u" Gold S2:Selective 5u"  
 G3:10u" Gold S3:Selective 10u"  
 G4:15u" Gold S4:Selective 15u"  
 G5:30u" Gold S5:Selective 30u"  
 SN: Tin
- ④ Connector Type  
D: Dual
- ⑤ Plastic High:  
H: 4.6  
Please mark the desired length in the H
- ⑥ Insulator Material  
B: PA6T  
C: LCP  
E: PA9T
- ⑦ Packing  
A: Tray  
B: Bag  
T: Tube  
U: Tube+CAP  
R: Tape&Reel  
W: Tape&Reel+CAP
- ⑧ Pin Length  
A: 1.6  
B: 2.4  
C: 3.0

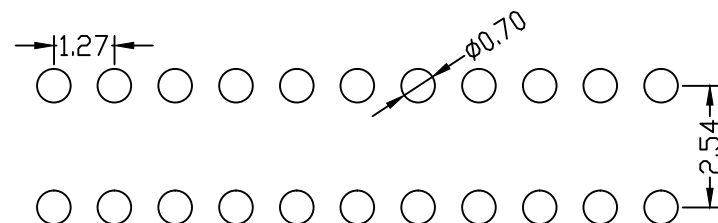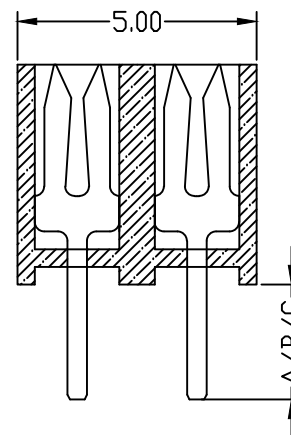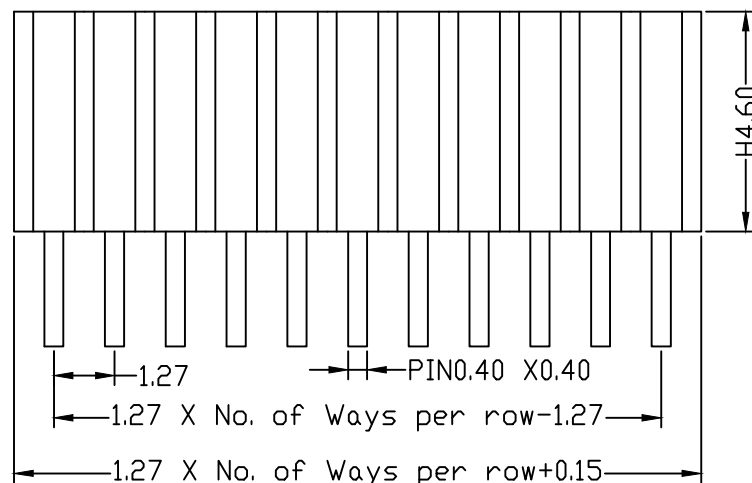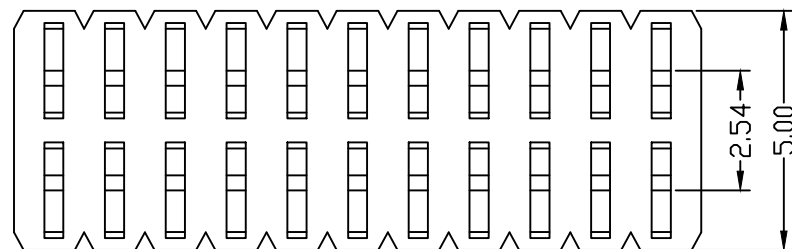

PCB LAYOUT

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk** ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail: sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW YG ZHONG	DATE 01/05/2016
CHECK BobYang	DATE 01/05/2016

TITLE:  
1.27 X 2.54mm Female Header Dual Row Straight Type



DRAWING NO: FHCS07-XXDXXXX  
 PRODUCT NO: FHCS07-XXDXXXX

REV	DESCRIPTION	DATE