

HSF







SPECIFICATION

Current Rating: 3 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHES05 - X - X - D - A - B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
02 To 80
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u "Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
D: Dual
- ⑤ Pin Length:
A:0600=6.00mm
B:0300=3.00mm
Please mark the desired length in the A/B
- ⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
- ⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

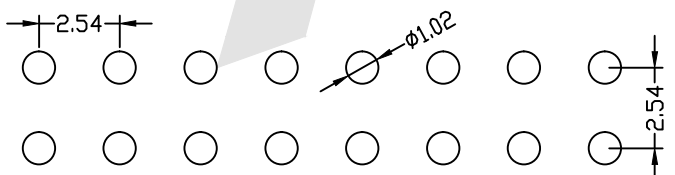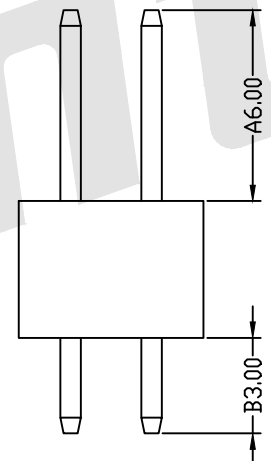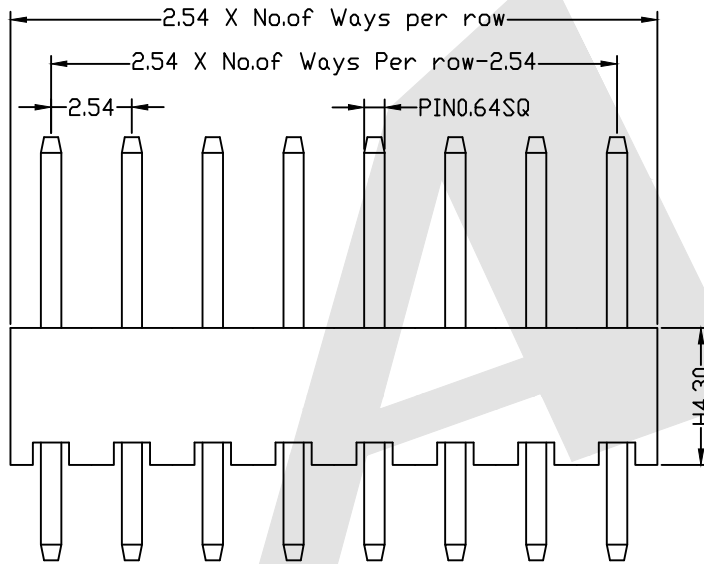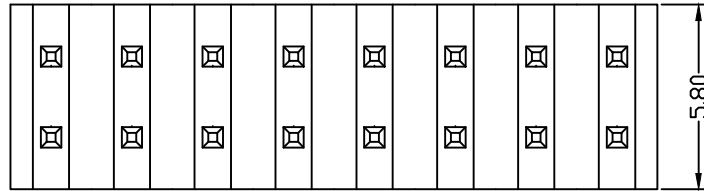

PCB LAYOUT

Standard IE P/N : PHES05-10-G0-D-0600-0300-A-B

| | | | |
|----------|--------|--------------------------------------|--------------|
| A | B | Unless Otherwise specified tolerance | |
| 6.00 | 3.00 | X. ±0.35 | X.XX: ±0.20 |
| | | X.X: ±0.25 | X.XXX: ±0.15 |
| Optional | SCALE: | As Shown | UNIT: mm |

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

| | | | | |
|-----|--------------------------------------|------------|----------------------|--|
| REV | Increase packing method and material | 2016/10/25 | 3rd ANGLE PROJECTION | TITLE: 2.54mm Pin Header Dual Row Straight Type H:4.3 |
| | DESCRIPTION | DATE | | DRAWING NO: PHES05-XXD-0600-0300-XX |
| | | | | PRODUCT NO: PHES05-XXD-0600-0300-XX |