

HSF







### SPECIFICATION

Current Rating: 1Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PA6T UL 94V-0 Black

Ordering Code:  
 FHCR03 - X - X - D - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts  
02 To 100
- ③ Contact Plating:  
 G0:Gold flash S0:Selective  
 G1:3u" Gold S1:Selective 3u"  
 G2:5u" Gold S2:Selective 5u"  
 G3:10u" Gold S3:Selective 10u"  
 G4:15u" Gold S4:Selective 15u"  
 G5:30u" Gold S5:Selective 30u"  
 SN: Tin
- ④ Connector Type  
D: Dual
- ⑤ Plastic High:  
H:3.45  
Please mark the desired length in the H
- ⑥ Insulator Material  
B:PA6T  
C:LCP  
E:PA9T
- ⑦ Packing  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP

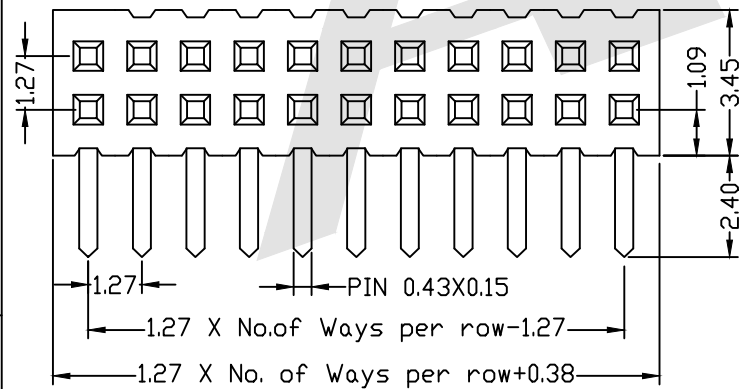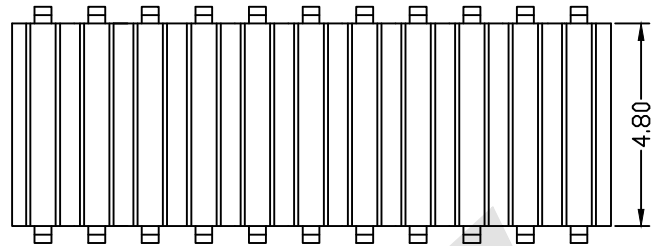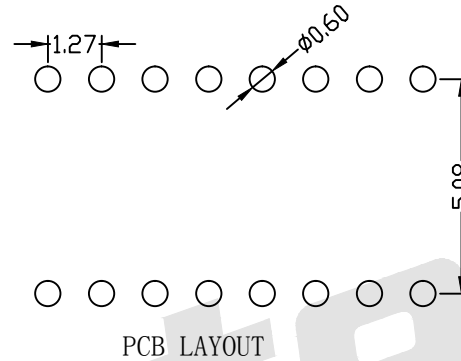

Unless Otherwise specified tolerance		X. ±0.35 X.XX: ±0.20		ANTENK ELECTRONICS CO., LTD <a href="http://www.antenk.com">Http://www.antenk.com</a> E-mail:sales@antenk.com
		X.X: ±0.25 X.XXX: ±0.15		
SCALE:	As Shown	UNIT:	mm	TITLE: 1.27mm Female Header Dual Side Insert Angle H:3.45
DRAW	YG ZHONG	DATE	01/05/2016	
CHECK	BobYang	DATE	01/05/2016	
REV	DESCRIPTION	DATE	DRAWING NO: FHCR03-XXDXXX PRODUCT NO: FHCR03-XXDXXX	

