


HSF



SPECIFICATION




Current Rating: 3.0 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

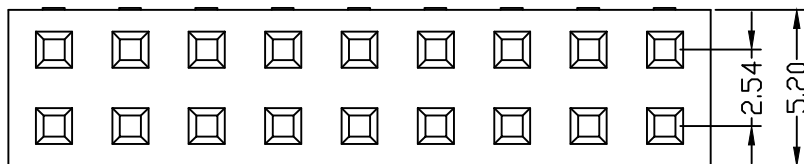

Ordering Code:

FHEU05 - X - X - D - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating: G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type: D:Dual
- ⑤ Plastic High: H:5.0
 Please mark the desired length in the H
- ⑥ Insulator Material: A:PBT, B:PA6T, C:LCP, D:PA46, E:PA9T
- ⑦ Packing: A:Tray, B:Bag, T:Tube, U:Tube+CAP, R:Tape&Reel, W:Tape&Reel+CAP
- ⑧ Special Function: A:Type 1, B:Type 2, C:Type 3

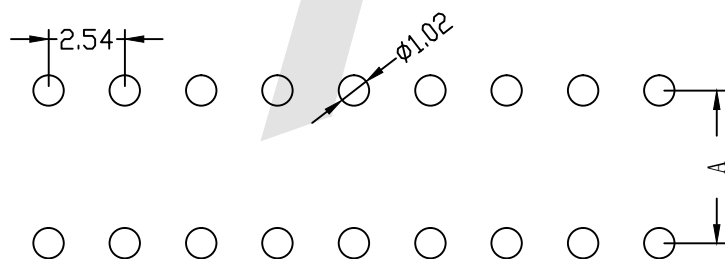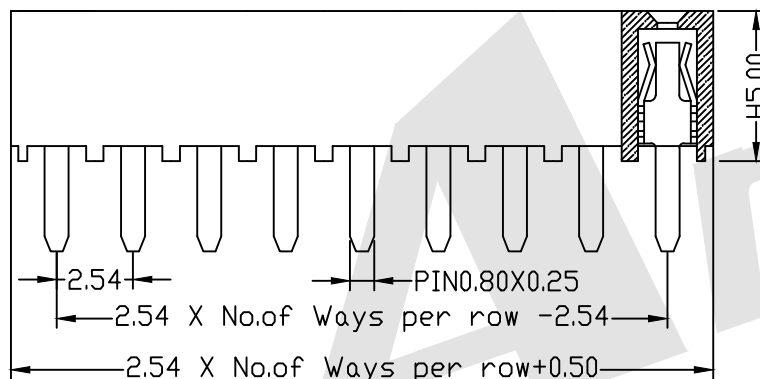

DIM:	Type1	Type2	Type3
A	3.81	5.08	7.62


PCB LAYOUT

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW: YG ZHONG DATE: 01/05/2016
 CHECK: BobYang DATE: 01/05/2016

TITLE:
 2.54mm Female Header Dual Row Centipede foot Type B



DRAWING NO: FHEU05-XXDXXX

PRODUCT NO: FHEU05-XXDXXX

REV	DESCRIPTION	DATE