

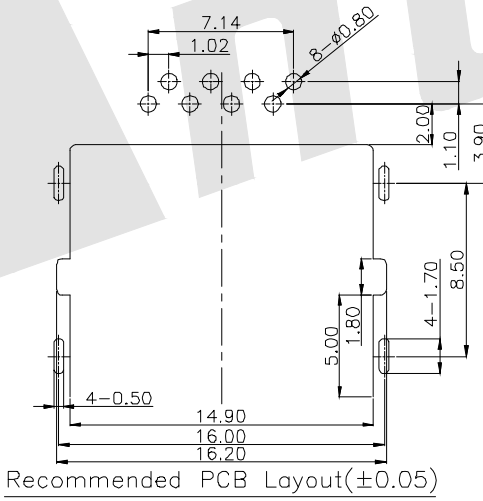
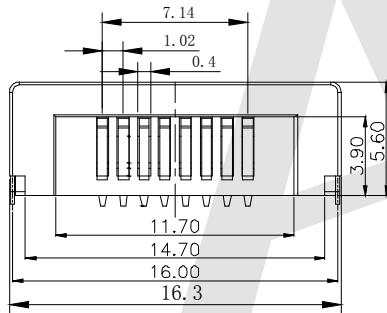
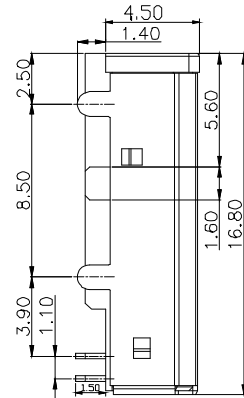


HSF

RoHS

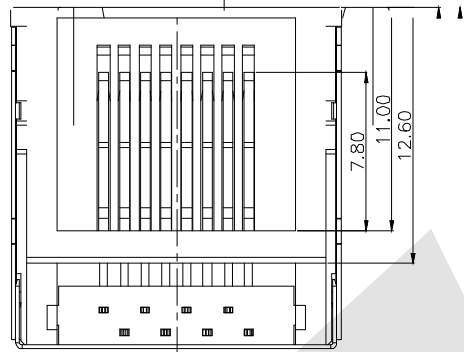

NOTES:

1. HOUSING MATERIAL:LCP UL94V-0
2. CONTACT MATERIAL:COPPER ALOOY, 0.35MM THICKNESS PLATING:1, 3, 5, 15, 30u" GOLD PLATED ON CONTACT AREA 100u"MIN. NICKEL PALTED OVERALL

ELECTRICAL:

1. VOLTAGE RATING:125V AC RMS
2. CURRENT RAING:1.5AMP
3. CONTACT RESISTANCE:30MILLIOHMS MAX
4. INSULATION RESISTANCE:500 MEGOHMS MIN @500V DC
5. DLELECTRIC WHTHSTANDING RESISTANCE: 1000V AC RMS 50HZ1MIN

MECHANICAL:

1. DURRABILITY:750 CYCLES MIN
2. PCB RETENTION PER-SOLDER:1LBMIN.

ENVIRONMENTAL:

1. STORAGE :-40°C~85°C
2. OPERATION:-40°C~85°C

Order Code:

ATRJ5831 - 8P - 8C - X - A

① ② ③ ④ ⑤


- ① SERIES NO:
- ② NUMBER OF POSITIONS(8P, 6P, 4P)
- ③ NUMBER OF CONTACTS(8C, 6C, 4C)
- ④ Contact Plating
G0:Gold flash
G1: 3U_s Gold
G2: 5U_s Gold
G3:10U_s Gold
G4:15U_s Gold
G5:30U_s Gold
SN:Tin
- ⑤ Shield
A:W/O Shield
B:Half Shield
C:Shield W/Eml
D:Shield W/O Eml

Unless Otherwise specified tolerance	
X. ±0.35	X.XX: ±0.20
X.X: ±0.25	X.XXX: ±0.15

Antenk ANTEK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 22/03/2018
CHECK BobYang	DATE 22/03/2018

TITLE:
RJ45 JACK 8P8C SINK IN RIGHT
ANGLE SLIM TYPE, H=4.5MM



DRAWING NO: ATRJ5831-8P8C-X-A
 PRODUCT NO: ATRJ5831-8P8C-X-A

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		