




# KK800A1600V

\*\*\*\*\*

## HIGH POWER THYRISTOR FOR INVERTER AND CHOPPER APPLICATIONS

### Features:

- . All Diffused Structure
- . Interdigitated Amplifying Gate Configuration
- . Guaranteed Maximum Turn-Off Time
- . High dV/dt Capability
- . Pressure Assembled Device

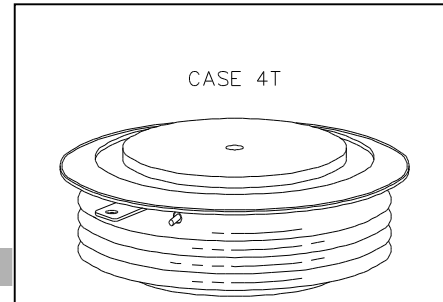

## ELECTRICAL CHARACTERISTICS AND RATINGS

### Blocking - Off State

Device Type	V <sub>RRM</sub> (1)	V <sub>DRM</sub> (1)	V <sub>RSM</sub> (1)
KK800A	1600	1600	1700

- V<sub>RRM</sub> = Repetitive peak reverse voltage
- V<sub>DRM</sub> = Repetitive peak off state voltage
- V<sub>RSM</sub> = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage and off state leakage	I <sub>RRM</sub> / I <sub>DRM</sub>	10 mA 35 mA (3)
Critical rate of voltage rise	dV/dt (4)	300V/μsec

### Notes:

All ratings are specified for T<sub>j</sub>=25 °C unless otherwise stated.

- (1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range -40 to +125 °C.
- (2) 10 msec. max. pulse width
- (3) Maximum value for T<sub>j</sub> = 125 °C.
- (4) Minimum value for linear and exponential waveshape to 80% rated V<sub>DRM</sub>. Gate open. T<sub>j</sub> = 125 °C.
- (5) Non-repetitive value.

### Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average value of on-state current	I <sub>T(AV)</sub>		800		A	T <sub>c</sub> =85°C
RMS value of on-state current	I <sub>TRMS</sub>		1250		A	Nominal value
Peak one cPSTCle surge (non repetitive) current	I <sub>TSM</sub>		14700		A	8.3 msec (60Hz), sinusoidal wave-shape, 180° conduction, T <sub>j</sub> = 125 °C
			13500		A	10.0 msec (50Hz), sinusoidal wave-shape, 180° conduction, T <sub>j</sub> = 125 °C
I square t	I <sup>2</sup> t		1.66x10 <sup>6</sup>		A <sup>2</sup> s	8.3 msec and 10.0 msec
Latching current	I <sub>L</sub>		1000		mA	V <sub>D</sub> = 24 V; R <sub>L</sub> = 12 ohms
Holding current	I <sub>H</sub>		500		mA	V <sub>D</sub> = 24 V; I = 2.5 A
Peak on-state voltage	V <sub>TM</sub>		2.80		V	I <sub>TM</sub> = 2000 A; Duty cPSTCle ≤ 0.01%
Critical rate of rise of on-state current (5, 6)	di/dt		300		A/μs	Switching from V <sub>DRM</sub> ≤ 1000 V, non-repetitive

# KK800A

## Gating

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Peak gate power dissipation	$P_{GM}$		200		W	$t_p = 40 \mu s$
Average gate power dissipation	$P_{G(AV)}$		5		W	
Peak gate current	$I_{GM}$		10		A	
Gate current required to trigger all units	$I_{GT}$		300 150 125		mA mA mA	$V_D = 6 V; R_L = 3 \text{ ohms}; T_j = -40 \text{ }^\circ\text{C}$ $V_D = 6 V; R_L = 3 \text{ ohms}; T_j = +25 \text{ }^\circ\text{C}$ $V_D = 6 V; R_L = 3 \text{ ohms}; T_j = +125 \text{ }^\circ\text{C}$
Gate voltage required to trigger all units	$V_{GT}$	0.30	5 3		V V V	$V_D = 6 V; R_L = 3 \text{ ohms}; T_j = -40 \text{ }^\circ\text{C}$ $V_D = 6 V; R_L = 3 \text{ ohms}; T_j = 0-125 \text{ }^\circ\text{C}$ $V_D = \text{Rated } V_{DRM}; R_L = 1000 \text{ ohms}; T_j = +125 \text{ }^\circ\text{C}$
Peak negative voltage	$V_{GRM}$		5		V	

## Dynamic

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Delay time	$t_d$		1.5	0.7	$\mu s$	$I_{TM} = 500 \text{ A}; V_D = \text{Rated } V_{DRM}$ Gate pulse: $V_G = 20 \text{ V}; R_G = 20 \text{ ohms}; t_r = 0.1 \mu s; t_p = 20 \mu s$
Turn-off time (with $V_R = -50 \text{ V}$ )	$t_q$		15		$\mu s$	$I_{TM} = 1000 \text{ A}; di/dt = 25 \text{ A}/\mu s;$ $V_R \geq -50 \text{ V}; \text{Re-applied } dV/dt = 200 \text{ V}/\mu s \text{ linear to } 80\% V_{DRM}; V_G = 0;$ $T_j = 125 \text{ }^\circ\text{C}; \text{Duty cPSTCl}e \geq 0.01\%$
Reverse recovery charge	$Q_{rr}$		*	2000	$\mu C$	$I_{TM} = 1000 \text{ A}; di/dt = 25 \text{ A}/\mu s;$ $V_R \geq -50 \text{ V}$

\* For guaranteed max. value, contact factory.


## THERMAL AND MECHANICAL CHARACTERISTICS AND RATINGS

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	$T_j$	-40	+125		$^\circ\text{C}$	
Storage temperature	$T_{stg}$	-40	+150		$^\circ\text{C}$	
Thermal resistance - junction to case	$R_{\Theta(j-c)}$		0.023 0.046		$^\circ\text{C}/\text{W}$	Double sided cooled Single sided cooled
Thermal resistance - case to sink	$R_{\Theta(j-c)}$		0.010 0.020		$^\circ\text{C}/\text{W}$	Double sided cooled * Single sided cooled *
Mounting force	P	19.5	21		kN	

\* Mounting surfaces smooth, flat and greased

Note : for case outline and dimensions, see case outline drawing in page 3 of this Technical Data

KK800A

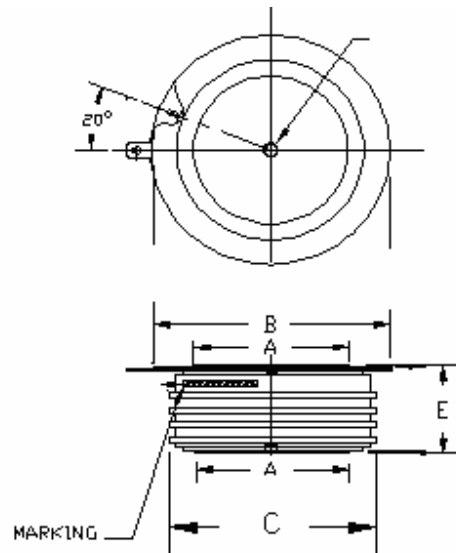

A: 47 mm

B: 74 mm

C: 66 mm

E: 26 mm

Add:Room303 Weiheng Building No.20 B Area Lanyuan , Wangyue Rd, Yangzhou  
Jiangsu P.R.C225000

Contact Person: John Chang, Sam Chou

Tel:+86-514-8736 0558,8778 2298,8778 2296

FAX:+86-514-8778 2297, 8736 7519

SKYPE ID : yzforever0313

MSN ID: [john\\_chang\\_370@hotmail.com](mailto:john_chang_370@hotmail.com)

[pst@pst888.com](mailto:pst@pst888.com), [positioning@china.com](mailto:positioning@china.com), [yzforevr@163.net](mailto:yzforevr@163.net)

Marketing web site:

[www.pst888.com](http://www.pst888.com)