


0.72W 55LM 170° IP68 LifeSpan 50,000h

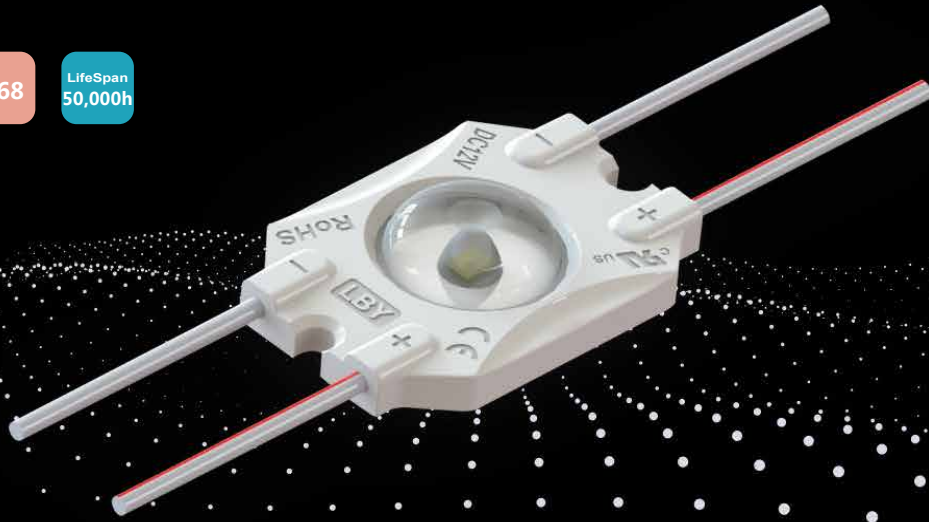

## Features >

- Sourced by high output SMD2835, good color conformity and no spot.
- 99.99% gold thread, pure copper bracket coated with silver.
- SDCM≤5 each BIN.
- Special lens design, 170°beaming angle with even light.
- Overmoulded: anti-dusting, anti-moisture, waterproof, anti-shock.
- 50 pcs Max. in a series connection.
- CE, ROHS and UL certified.

## Application >


- Best for 3.5-15 cm depth single-sided light box at airports, metros, banks, buildings and shopping malls, etc.

**Parameters** >


Items	Parameters
Part Number	ZE01BB2
CCT ( K )	7000K
Beaming Angle ( ° )	170
CRI ( Ra )	≥75
Luminous Flux ( lm )	55
Voltage ( V )	DC12
Power ( W )	0.72
Driving Method	Inner Constant Current
Dimension ( mm )	37*25.5*7.1
Weight ( g )	6.67
Working Tem. ( °C )	-25 ~ +60
Storage Tem. ( °C )	-25 ~ +70
Protection Grade	IP68

**Dimension** >

Unit:mm

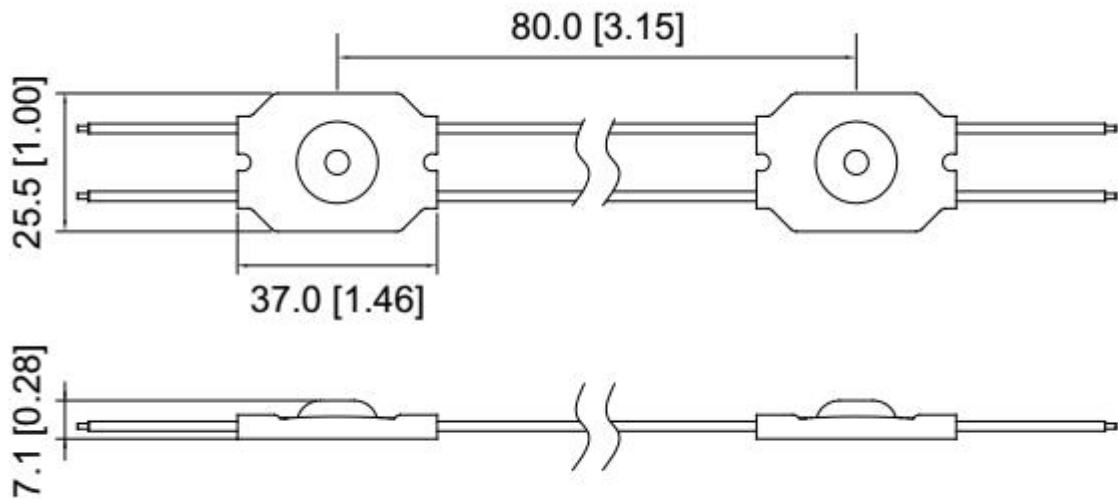

## Beaming Angle >

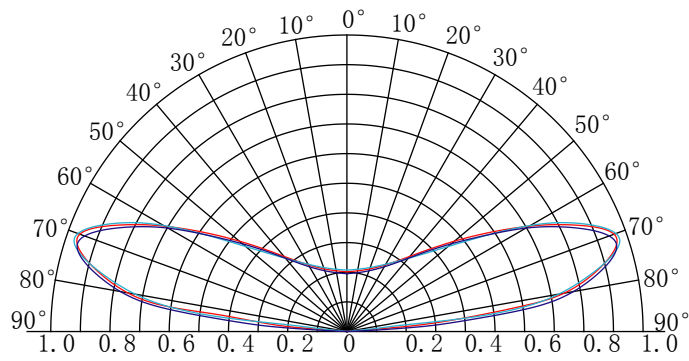


## Reference Scheme >


Depth(mm)	Distance(mm)	Density(pcs/m <sup>2</sup> )	Illumination(lux)
Dz=35	Dx=80 Dy=80	144	5400-5800
Dz=40	Dx=80 Dy=80	144	5200-5500
Dz=45	Dx=80 Dy=80	144	5000-5300
Dz=50	Dx=80 Dy=80	144	4800-5100
Dz=55	Dx=80 Dy=80	144	4600-4850

### Remark:


- The transmittance of the advertising fabric was 32%.
- The above data is for reference only.

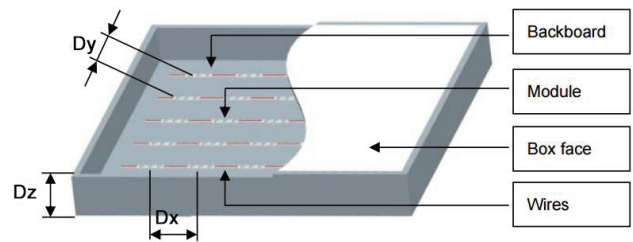


## Wire Connection >

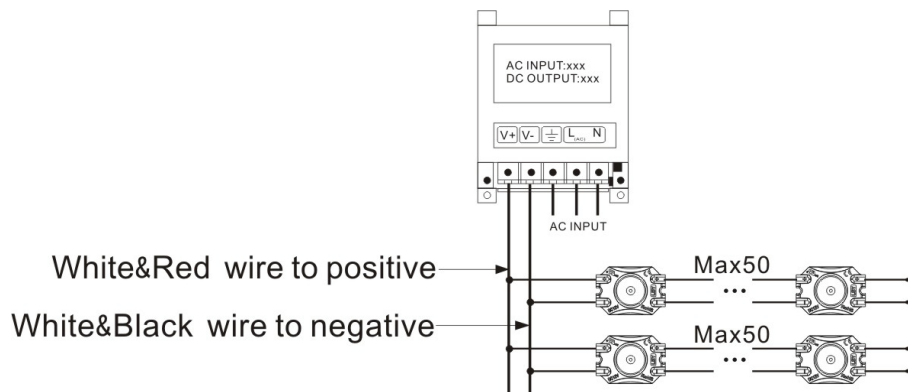


## Packing



50 pcs per string



100 pcs in an antistatic bag

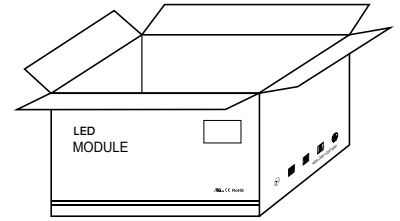

2000 pcs per carton

## Packing Specification

- Antistatic bag adopted
- Packing information

Part Number	ZE01BB2
Carton dimension(mm)	490*450*220
Bags per carton	20
Quantity per carton(pcs)	2000
Net Weight(kg)	13.33(1±10%)
Gross Weight(kg)	14.87(1±10%)

- Due to the packing manner difference, please subject to the original products in case of discrepancy found between the picture and actual product.

## Warning

- Disassembling or modifying the product is forbidden.
- Installation with power on is forbidden.
- Any organic solvent chemical is forbidden.
- Acidic or alkaline adhesive is forbidden when install, neutral glass cement could be used for installation purpose, make it drying in open environment for four hours.
- Isolation and corrosion prevention on all wiring points and wire ends.
- Make sure the power wire is thick enough and ensure the voltage and connections are connected correctly before power on.
- This product should be used in a sign, do not expose it in opening site.
- Installation, maintaining should be done by professional staff.
- 50 pcs in a serial connection maximum.
- The power wire between power supply and module should be less than two meters to keep the same brightness on all parts.

## Declaration



- Warranty: 5 years.
- In order to ensure the safety, the broken wires need to be replaced by the manufacturer or the service agent, or by the staff with the similar qualification.
- The given data in the specification was based on the laboratory testing, there may be discrepancy found in the actual products.
- The given drawings in the specification are only for reference, there may be discrepancy found in the actual products.
- The products are subject to change without prior notification.



RoHS

**Company Address:**

Rm. WS, 9F, LuBan Building, Hongli West Road, Futian District, Shenzhen, China 518034

**Factory Address:**

No. B, Xinyongfeng Industrial Area, Yingrenshi Village, Shiyuan Town, Bao'an District, Shenzhen, China 518000

**TEL:** +86-755-83544570

**FAX:** +86-755-83056229

**Website:** [www.lbyled.com](http://www.lbyled.com)

**E-mail:** [info@szlby.cn](mailto:info@szlby.cn)



**LBY LED**  
signs never been so easy