
SPECIFICATIONS

Voltage Proof:250VAC for 1 minute. Switching Rating:24VDC,25mA. Non-Switching Rating:100m Ω ,50VDC. Contact Resistance: (a)100m Ω max. (Initial) (b)200m Ω (final-after test) Insulation Resistance:100M Ω min, at 250VDC. Operating Temperature Range: -25°C to 80°C. Solderability:230 ± 5°C 3± sec. 75% Electrical Life:200m Ω max, 20000 steps.

HOW TO ORDER

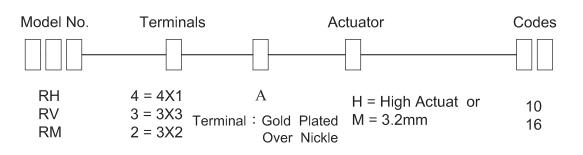

CIRCULT CHART

TYPE	POSITION	CODE			
		1	2	4	8
	0	•	•	•	
	1	0	•	•	
	2	٠	0	•	
	3	0	0	•	
010 (H)	4	٠	•	0	
	5	0	•	0	
	6	٠	0	0	
	7	0	0	0	
	8	٠	•	•	0
	9	0	•	•	0
	A	٠	0	•	
016 (H)	В	0	0	•	0
	С	٠	٠	0	0
	D	0	٠	0	C
	Е	٠	0	0	0
	F	0	0	0	

O ON ● OFF							
TYPE	POSITION	CODE					
		1	2	4	8		
	0	٠	•	٠	•		
	1	0	•	٠	•		
	2	•	0	•	•		
	3	0	0	٠	•		
10 STEP	4	•	٠	0	•		
	5	0	٠	0	•		
	6	٠	0	0	•		
	7	0	0	0	•		
	8	٠	•	٠	0		
	9	0	•	٠	0		
16 STEP	A	٠	0	٠	0		
	В	0	0	٠	0		
	C	•	٠	0	0		
	D	0	٠	0	0		
	E	•	0	0	0		
	F	0	0	0	0		


	POSITION	DE CODE 1 2 4 8				
TYPE						
	0	•	~		•	
10 R		-	•		•	
	1	0	-	—	-	
	2	•	0	•	•	
	3	0	0	•	•	
	4	٠	•	0	•	
	5	0	•	0	•	
	6	٠	0	0	•	
	7	0	0	0	•	
	8	٠	٠	٠	0	
	9	0	٠	٠	0	
16 R	A	•	0	•	0	
	В	0	0	٠	0	
	С	٠	•	0	0	
	D	0	•	0	0	
	E	٠	0	0	0	
	F	0	0	0	0	





<u>RH2A-16C</u>

RH2A-16R




.386

9.80

6


.390 .012 9.90 0.30





RH2A-XXX

RH RV RM Series Rotary Code Switches

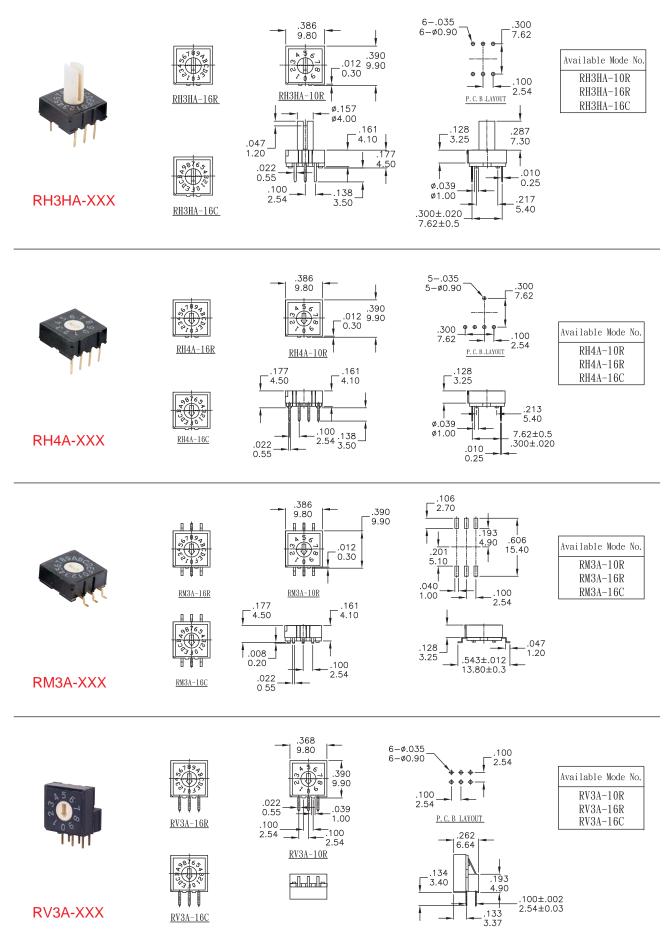

RH RV RM Rotary Switches

RH RV RM Series

Rotary Code Switches

